

Straight Blade Devices 20A, 125/250V, 3 Pole, 4 Wire Grounding Plug

HUBBELL

Features

- Industrial heavy duty plug
- Angled, low profile
- 4-position assembly

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Plug, nylon, angle 4-position	.390"-.775"(9.9-19.7)	783585013114	HBL8411C

Listings

UL Listed to UL498 File E1706
CSA Certified to C22.2 No. 42 File 280C
NEMA® WD-6 Compliant

Specifications


Housing/Cord Clamp	Nylon
Blade Holder	Nylon
Terminal Retainer	Clear Polycarbonate
Blades	Brass
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Assembly Screws	Zinc plated steel

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical	
Cord Accomodation	.390"-.775"(9.9-19.7)
Terminal Accommodation	#14-10 AWG. Standed copper wire only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA

Environmental	
Flammability	UL 94 V-2
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

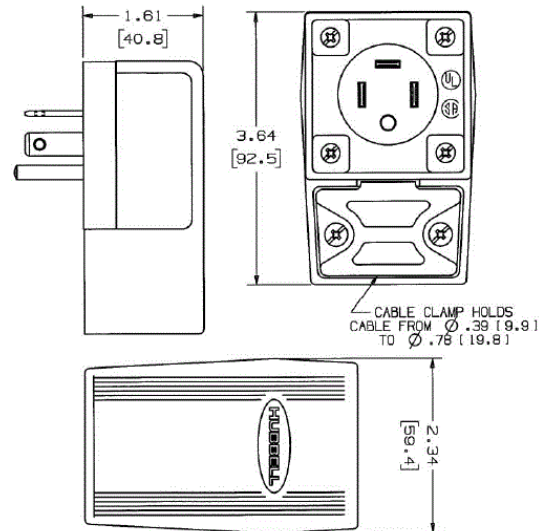

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

