

Straight Blade Devices  
 20A, 3 Phase 250V AC, 3 Pole, 4 Wire  
 Grounding  
 Plug

# HUBBELL

## Features

- Industrial heavy duty plug
- Angled, low profile
- 4-position assembly

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Plug, nylon, angle 4-position	.390"-.775"(9.9-19.7)	783585013299	HBL8421C

## Listings

UL Listed to UL498 File E1706  
 CSA Certified to C22.2 No. 42 File 280C  
 NEMA® WD-6 Compliant

## Specifications

Housing/Cord Clamp	Nylon
Blade Holder	Nylon
Terminal Retainer	Clear Polycarbonate
Blades	Brass
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Assembly Screws	Zinc plated steel

## Performance

### Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

### Mechanical

Cord Accommodation	.390"-.775"(9.9-19.7)
Terminal Accommodation	#14-10 AWG. Standed copper wire only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA

### Environmental

Flammability	UL 94 V-2
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

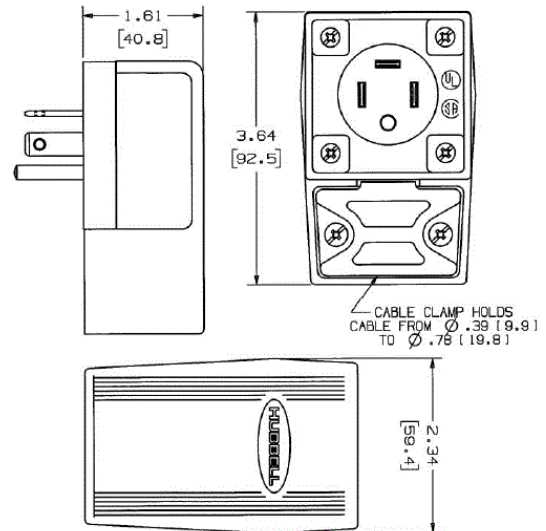

## Resources

Customer Use Drawing  
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

