

Straight Blade Devices
20A, 125/250V, 3 Pole, 4 Wire Grounding
Single Receptacle

HUBBELL

Features

- Industrial Heavy Duty Receptacle
- Deep body design
- Impact resistant

Ordering Information

Description	Device Color	UPC	Catalog Number
Receptacle, black	Black	783585015705	HBL8410

Listings

UL Listed to UL498 File E1706
 CSA Certified to C22.2 No. 42 File 280C
 NEMA® WD-6 Compliant

Specifications


Body	Nylon
Base	PBT
Contacts	Brass
Mounting Plate	Steel
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Mounting Screws	Plated steel
Ground Contact Assembly	Brass

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
Environmental	
Flammability	UL 94 V-2
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)



20A 125V/250V
NEMA 14-20R
 UL CSA
 2(1) HP

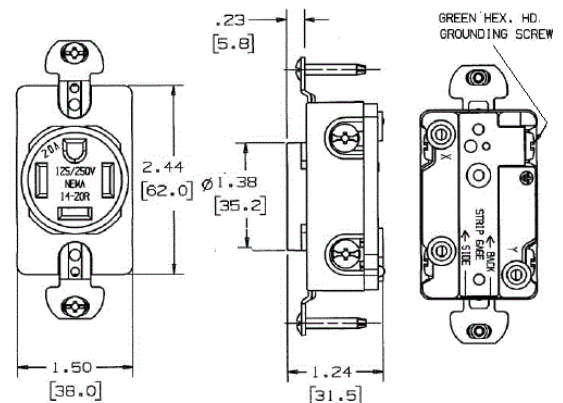

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

Accessories

Wallplate or Weatherproof Cover

1.40" Opening

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

