



**20 Amp, 3ØY 120/208, 277/480 and 347/600 Volts AC
4 Pole, 5 Wire, Grounding**




HBL2511SW

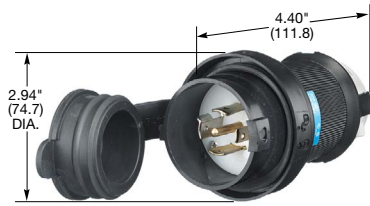


HBL2511S



HBL2511



HBL2515SW



HBL2515

Dimensions in Inches (mm)

Plugs

Watertight Safety-Shroud®

Description	Cord Dia.	Catalog Number	IP66 SUITABILITY		UL Type 4x, 12	
			20A 3ØY 120/208V AC NEMA L21-20P 2 HP	20A 3ØY 277/480V AC NEMA L22-20P 5 HP	20A 3ØY 347/600V AC NEMA L23-20P	
Black Valox® housing, white Valox® clamps.	.350"-1.150" (9-29)	HBL2511SW	-	-	-	-

Safety-Shroud®

Description	Cord Dia.	Catalog Number	IP20 SUITABILITY			
Black and white nylon body, white Valox® shroud. Can be used with the Insulgrip Connector Bodies.	.350"-1.150" (9-29)	HBL2511S	-	-	-	-

Note: See page B-40 for accessories.

Insulgrip®

Description	Cord Dia.	Catalog Number	IP20 SUITABILITY		
Black and white nylon.	.350"-1.150" (9-29)	HBL2511	HBL2521	HBL2531	
Black and white nylon, spring termination.	.350"-1.150" (9-29)	HBL2511ST	HBL2521ST		-
All black nylon.	.350"-1.150" (9-29)	HBL2511BK	-	-	-
All black nylon, spring termination	.350"-1.150" (9-29)	HBL2511STBK	-	-	-
Corrosion resistant, yellow nylon.	.350"-1.150" (9-29)	HBL25CM11	-	-	-
Black and white for flat cable.	.350"-1.150" (9-29)	HBL2511FC	-	-	-

Note: See page B-52 for accessories.

Flanged Inlets

Watertight Safety-Shroud®

Description	Catalog Number	IP66 SUITABILITY		UL Type 4x, 12	
Gray Valox® housing and flange.	HBL2515SW	-	-	-	-

Note: See page B-52 for accessories.

Insulgrip®

Description	Catalog Number	IP20 SUITABILITY		
Nylon casing, back wired.	HBL2515	HBL2525	HBL2535	
Nylon casing, spring termination.	HBL2515ST	HBL2525ST		-

Note: See page B-52 for accessories.

See pages B-69 and B-70 for technical information on Twist-Lock and Watertight Safety-Shroud devices.

Twist-Lock® 3-Phase Circuit Tester

Description	Rating	Catalog Number	UL	
3-Phase Circuit Tester.	3Ø 120/208V AC Min. Voltage: 90V AC	HBL3PT2511	-	-

Note: Testers in other NEMA configurations can be developed upon request. See page B-53 for additional circuit testers.



HBL3PT2511

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.

HBLMITL - For use with Watertight Safety-Shroud receptacles, see page B-41.

