

## 30 Amp, 3ØY 120/208, 277/480 and 347/600 Volts AC 4 Pole, 5 Wire, Grounding



30A 3ØY 120/208V AC NEMA L21-30R 3 HP	30A 3ØY 240/415V AC NEMA L26-30R	30A 3ØY 277/480V AC NEMA L22-30R 10 HP	30A 3ØY 347/600V AC NEMA L23-30R
--	--	---	--


### Connector Bodies

#### Watertight Safety-Shroud®

IP66 SUITABILITY

UL Type 4x, 12

Description	Cord Dia.	Catalog Number			
Black Valox® housing, white Valox® clamps.	.350"-1.150" (9-29)	<b>HBL2813SW</b>	<b>HBL2803</b>	<b>HBL2823SW</b>	-

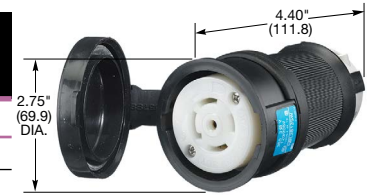

**HBL2813SW**

#### Insulgrip®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number			
Black and white nylon.	.350"-1.150" (9-29)	<b>HBL2813</b>	-	<b>HBL2823</b>	<b>HBL2833</b>
Black and white nylon, spring termination	.350"-1.150" (9-29)	<b>HBL2813ST</b>	-	<b>HBL2823ST</b>	-
Corrosion resistant, yellow nylon.	.350"-1.150" (9-29)	<b>HBL28CM13</b>	-	-	-
Black and white for flat cable.	.350"-1.150" (9-29)	<b>HBL2813FC</b>	-	-	-
All black nylon.	.350"-1.150" (9-29)	<b>HBL2813BK</b>	-	-	-



**HBL2813ST**



**HBL2813**

Note: See page B-52 for accessories.

### Receptacles

#### Watertight Safety-Shroud®

IP66 SUITABILITY

UL Type 4x, 12

Description	Catalog Number			
Gray Valox® housing and flange, back wired.	<b>HBL2810SW</b>	-	<b>HBL2820SW</b>	<b>HBL2830SW</b>

Note: See page B-54 for accessories.




**HBL2810SW**

#### Safety-Shroud® Twist-Lock®

IP20 SUITABILITY

Description	Catalog Number			
Gray Valox® angle housing, one gang, back wired.	<b>HBL2810AR</b>	-	-	-
Gray Valox® surface mounting, one gang, back wired.	<b>HBL2810SR</b>	-	-	-
Gray Valox® semi-flush, two gang, back wired.	<b>HBL2810SR2</b>	-	-	-

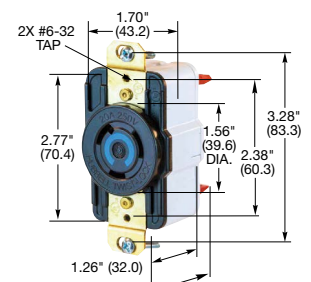

**HBL2820ST**

#### Single Flush Receptacles

IP20 SUITABILITY

Description	Catalog Number			
Black nylon face, back and side wired.	<b>HBL2810</b>	<b>HBL2800</b>	<b>HBL2820</b>	<b>HBL2830</b>
Black and white nylon, spring termination	<b>HBL2810ST</b>	-	<b>HBL2820ST</b>	-
Isolated ground, orange nylon face, back and side wired.	<b>IG2810</b>	-	-	-
Ring terminal connection.	<b>HBL2810RT</b>	-	-	-

Note: See page B-52 for accessories.



**HBL2810SR**

#### Insulgrip® Flanged Receptacles

Description	Catalog Number			
Nylon casing, back wired.	<b>HBL2816</b>	-	<b>HBL2826</b>	<b>HBL2836</b>
Nylon casing, back wire, spring termination	<b>HBL2816ST</b>	-	<b>HBL2826ST</b>	-
Black nylon casing, back wire, spring termination	<b>HBL2816STBK</b>	-	-	-

Note: See page B-52 for accessories.

Dimensions in Inches (mm)

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.