

## 50 Amp, 250 Volts DC and 600 Volts AC



**HBL3763C**


**IP20**  
SUITABILITY



### Plugs

| Description                                      | Cord Dia.                     | Catalog Number  |
|--|-------------------------------|-----------------|
| Nylon housing, thermoplastic polyester interior. | .830"-1.250"<br>(21.08-31.75) | <b>HBL3763C</b> |


Note: See page B-60 for accessories.

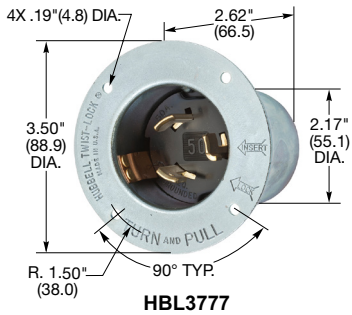

**HBL3777**


### Flanged Inlets

| Description   | Catalog Number |
|---|----------------|
| Zinc plated steel casing, thermoset interior.                 | <b>HBL3777</b> |
| Zinc plated steel casing, thermoset interior with lift cover. | <b>HBL3767</b> |

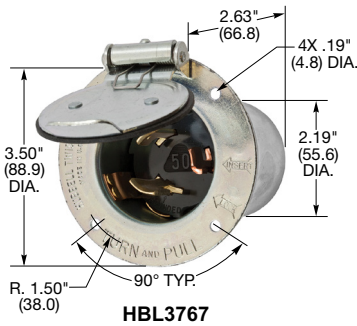

**HBL3767**

**IP20**  
SUITABILITY



### Connector Bodies

| Description                                      | Cord Dia.                     | Catalog Number  |
|--|-------------------------------|-----------------|
| Nylon housing, thermoplastic polyester interior. | .830"-1.250"<br>(21.08-31.75) | <b>HBL3762C</b> |

Note: See page B-60 for accessories.


### Receptacles

| Description     | Catalog Number |
|-----------------|----------------|
| Black phenolic. | <b>HBL3771</b> |

Note: See page B-60 for accessories.



**HBL3762C**



**HBL3771**

Dimensions in Inches (mm)