

Twist-Lock® Devices
50A, 250V AC, 2 Pole, 3 Wire Grounding
Receptacle

HUBBELL

Features

- Thermoset construction offers high heat resistance
- Armored housing provides superior impact resistance
- One piece contacts provide low operating temperatures

Ordering Information

Description	Device Color	UPC	Catalog Number
Phenolic	Black	783585828909	CS8269

Listings


Listed to UL 498
 Certified to CSA C22.2 No.42

Specifications

Body	Phenolic
Face	Phenolic
Contacts	Brass
Terminal Screws	Steel
Insulator	Phenolic

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#10 AWG - #4 AWG solid or stranded copper wire only
Environmental	
Flammability	UL 94 V0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

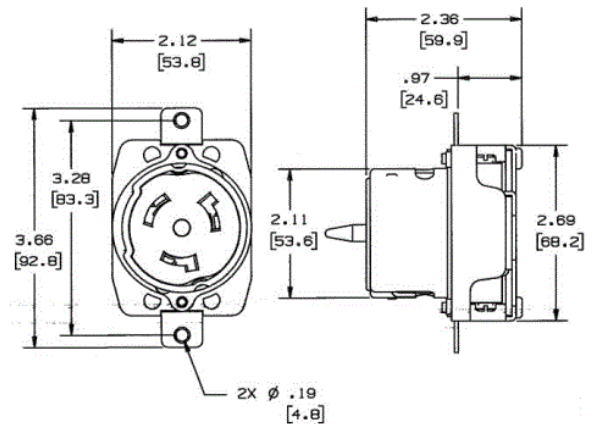

Accessories

Plug	CS825C
Weatherproof Lift Cover	HBL7774WO
Single Gang Stainless Steel Wallplate	SS750
4" Square Raised Cover	HBL50SC

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

