




[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

GS931 -- Spacer, Secondary

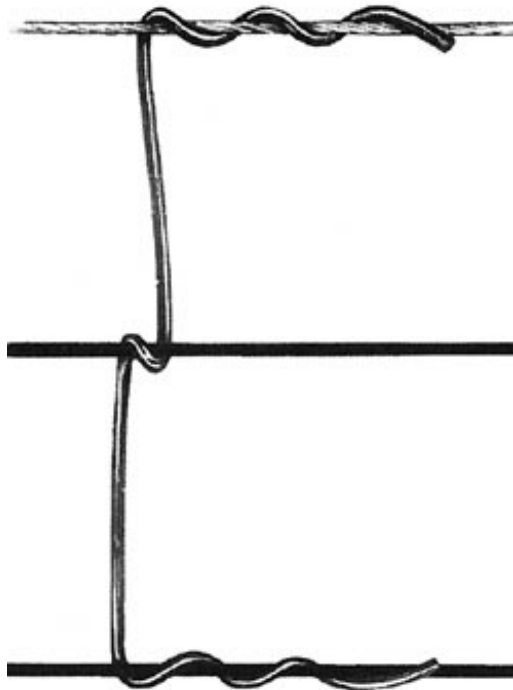

Three Conductor PVC Spacer, 8" Centers


Product Specifications

Product Category



Fargo Riser Ties
PVC Ties for spacing and supporting covered conductor systems

Ties/Spacers Series

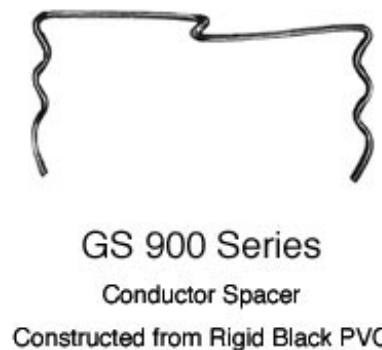

GS 900 Series
Conductor Spacer
Constructed from Rigid Black PVC

Conductor Spacing

8 in (203 mm)

Covered Conductor Range

0.162 - 0.398 in (3.2 - 10.1 mm)

Conductor Range Minimum

.162 in (4.1 mm)

Conductor Range Maximum

.398 in (10.1 mm)

Conductor Type	AAC, AAAC, ACAR, ACSR, CU or Compact
Material	Rigid Black PVC
Color Code	White
Dimension A	8.5 in (216 mm)
Dimension B	16.75 in (426 mm)
Dimension C	0.38 in (10 mm)
Dimension D	8 in (204 mm)
Material Type	Non-Standard
UPC Code	09635931366
Standard Package	100
Standard Package Unit	Each
Min Order Qty	100
Weight / Ea.	0.235 lbs

Notes


Made from rigid PVC.

Features

Once piece, No tools required for installation, Dielectric strength of 100V/mil.

Compressed Product Number

GS931

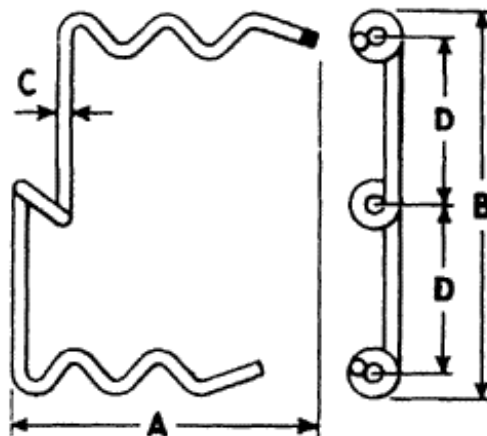

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.