

Catalog Number: Item Description: UPC Code: U4801-O-5T9 200A 5T RL HD LVR UG 784572288225

Brand Name:	Milbank		
Туре:	Ringless N	1eter Socket	
Application:	Meter Soc	ket	
Standard:	UL Listed		
Voltage Rating:	600 Volts /	Alternating Current	
Amperage Rating:	200 Contir	nuous Ampere	
Phase:	1 Phase		
Frequency Rating:	60 Hertz		
Number Of Cutouts:	0		
Cable Entry:	Overhead	and Underground	
Terminal:	Lay in Line	e Side and Lay in Load Side	
Mounting:	Surface M	ount	
Enclosure:	Type 3R, C Powder Co	390 Galvanized Steel with oat Finish	
Additional Specifications:		Number of Jaws:5 Terminal	
		Hub Opening and Closing Plates	s:Plain Top
		Hub Opening and Closing Plates	s:Plain Top




Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.


Hub Opening and Closing Plates:Plain Top


Hub Opening and Closing Plates:Plain Top

Hub Opening and Closing Plates:Plain Top

FEATURE TABLE			
ITEM	QTY	DESCRIPTION	
Α	5	U/L MNTG.EMBOSS	
В	1	1/4 SOLID K.O.	
С	1	1/4, 1/2 CONC. K.O.	
D	2	1, 1¼, 1½, 2, 2½ CONC. K.O.	
Е	4	1¼, 1½, 2, 2½, 3 CONC. K.O.	

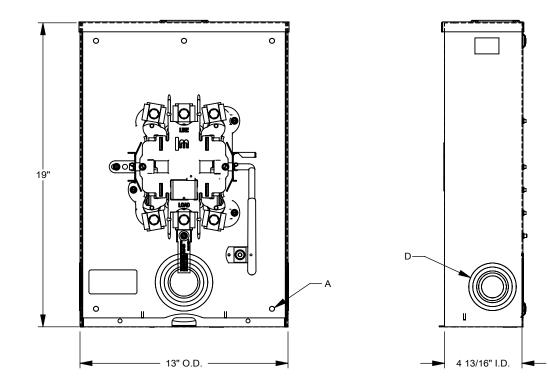

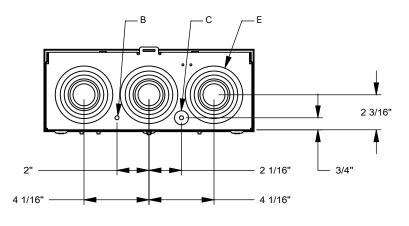

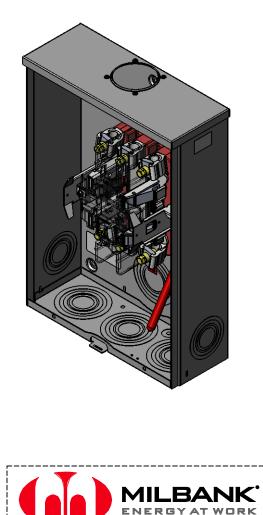

Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.