



**POWER  
SYSTEMS, INC.**

*In the world of power transmission and distribution, look to Hubbell.*

**Interactive  
eCatalog**

[Catalog Home](#)

**Product Datasheet**

**ANDERSON FARGO**

**BSD68S -- Strain Clamp, Quadrant, Heavy Duty**



Strain Clamp, Quadrant, Heavy Duty, Bronze, Conductor Range 0.3 - 0.68 in,  
Fitting: Socket

**Product Specifications**

**Category Image**



**Bolted  
Deadends**

Aluminum & Bronze

Quadrant

Aluminum & Copper  
Conductor

**Series Image (Quadrant)**

**BSD/BSDS Series**



**Quadrant Dead End**

Bolted, Bronze

Copper & Copperweld®  
Conductor

**PDF Catalog Page**

[Click HERE to view the web page.](#)

**Fitting Type**

Socket

**Style**

BSD - Strain Clamp, Quadrant, Heavy Duty

**Type**

Bolted

**Material**

Bronze

**Fitting Catalog No.**

SA-04

**Voltage Application**

Std

**Body Material**

Aluminum Bronze Alloy

**Keeper Material**

Electrical Bronze

**Socket and Clevis Material**

Galvanized Ductile Iron


**Cotter Pin Material**

#302 Stainless Steel

<b>Hardware Material</b>	Galvanized Steel
<b>Ultimate Body Strength</b>	17,000 lb (7,711 kg)
<b>U-Bolts</b>	4
<b>Bolt Size</b>	.50 in (12.70 mm)
<b>Dimension C</b>	9.5 in (241.3 mm)
<b>Dimension K</b>	1.63 in (33.34 mm)
<b>Dimension L</b>	11 in (279.40 mm)
<b>Dimension W</b>	3/4 in (19.05 mm)
<b>Conductor Range Minimum - Maximum</b>	Cu 1/0 sol Thru Cu 350 kcmil (19)
<b>Minimum Conductor Diameter</b>	0.3
<b>Maximum Conductor Diameter</b>	0.68
<b>Weight / Ea.</b>	9.8 lbs
<b>Standard Package</b>	3
<b>UPC Code</b>	09635929278

<b>Notes</b>
For use with ANSI class 52-3 & 52-5 insulators.

<b>Compressed Product Number</b>
BSD68S

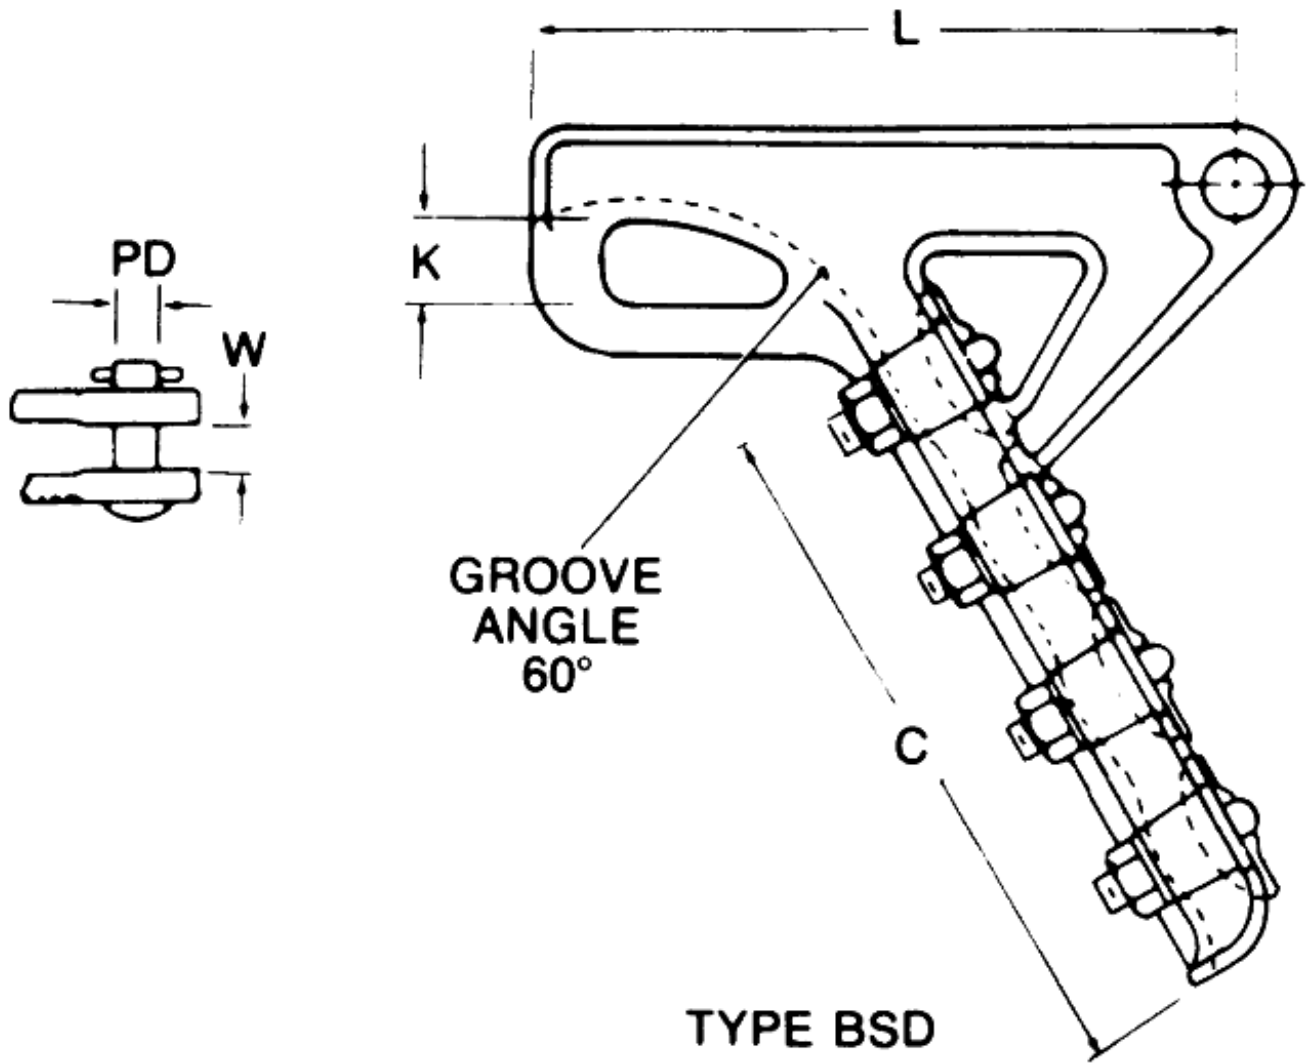

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.