



[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

SEDA5118 -- Compression Deadend



Compression Deadend, Conventional 2-Die, Single Tongue, for ACSR 1272.0 kcmil 45/7, With Terminal

Product Specifications

Category Image



**Compression
Deadend
Assemblies**

Aluminum

Conventional (two die)

AAC, ACSR, & ACSS
Conductor

Series Image (Comp Assy)




	Click HERE to view the web page.
Terminal Option	With
Style	Conventional 2-Die, Single Tongue
Outside Diameter	1.345 in
Type	Compression
Material	Aluminum/Steel
Compression Method	Conventional (2 die system)
Aluminum Die	36AH
Steel Die	12SH
Minimum Press (Tons)	60
Voltage Application	EHV & Std
Inhibitor Loaded	No
Body Material	Seamless Extruded Aluminum Alloy
Eye Material	Galvanized Forged Steel
Terminal Material	Seamless Extruded Aluminum Alloy
Hardware Material	Aluminum Alloy
Length before Compression	21.8 in (554 mm)
Dimension A	2.62 in (66.5 mm)
Dimension B	1.24 in (31.5 mm)
Dimension C	.78 in (19.8 mm)
Pad Width	3.0 in (76 mm)
Bolt Holes	4
Conductor Range Minimum - Maximum	ACSR 1272.0 kcmil (45/7) Bittern
Weight / Ea.	8.43 lbs
Standard Package	1

Notes

To specify double-tongue deadend, change first character of Catalog Number from S to D.

Compressed Product Number

SEDA5118

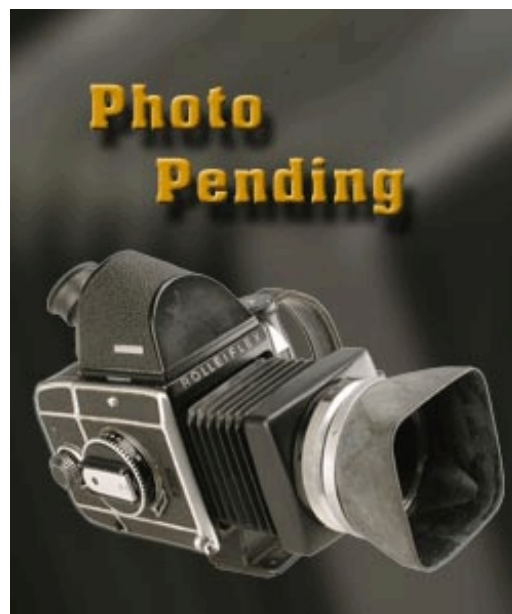

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.