




[Catalog Home](#)

**Product Datasheet**

**ANDERSON FARGO**

**TSCHT200**

**Product Specifications**



<b>Series</b>	 <p><b>TSC &amp; TSCHT series</b> Standard Voltage, Aluminum &amp; High Temp Aluminum</p>
<b>PDF Catalog Page</b>	<a href="#">Click HERE to view the web page.</a>
<b>With Anti-Static Springs</b>	No
<b>Clamp Material</b>	Aluminum, Hi-Temp alloy
<b>Ultimate Body Strength</b>	2,800 lbs (1,270 kgs)
<b>Maximum Take-off Angle 0</b>	20
<b>Dimension J</b>	0.500 in (12.7 mm)
<b>Dimension L</b>	5.25 in (133.3 mm)
<b>Dimension W</b>	3.88 in (98.4 mm)
<b>Hardware Material</b>	Galvanized Steel
<b>Minimum - Maximum Conductor Size</b>	ACSS 636.0 kcmil (24/7) w/Armor Rods thru ACSS 1113.0 kcmil (45/7) w/Armor Rods
<b>Voltage Application</b>	Standard
<b>Material Type</b>	Non-Standard
<b>UPC Code</b>	09635936337
<b>Standard Package</b>	25
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	1
<b>Weight / Ea.</b>	0.588 lbs

**Features**

Permanent marks include the IEC standard symbol for HOT surface, symbol located for visibility from the ground with binoculars.

**Compressed Product Number**

TSCHT200

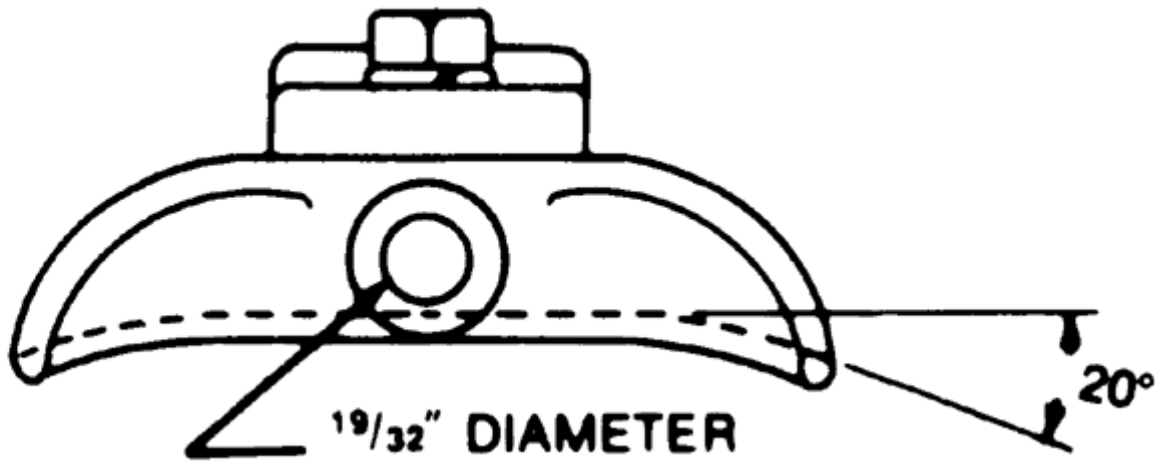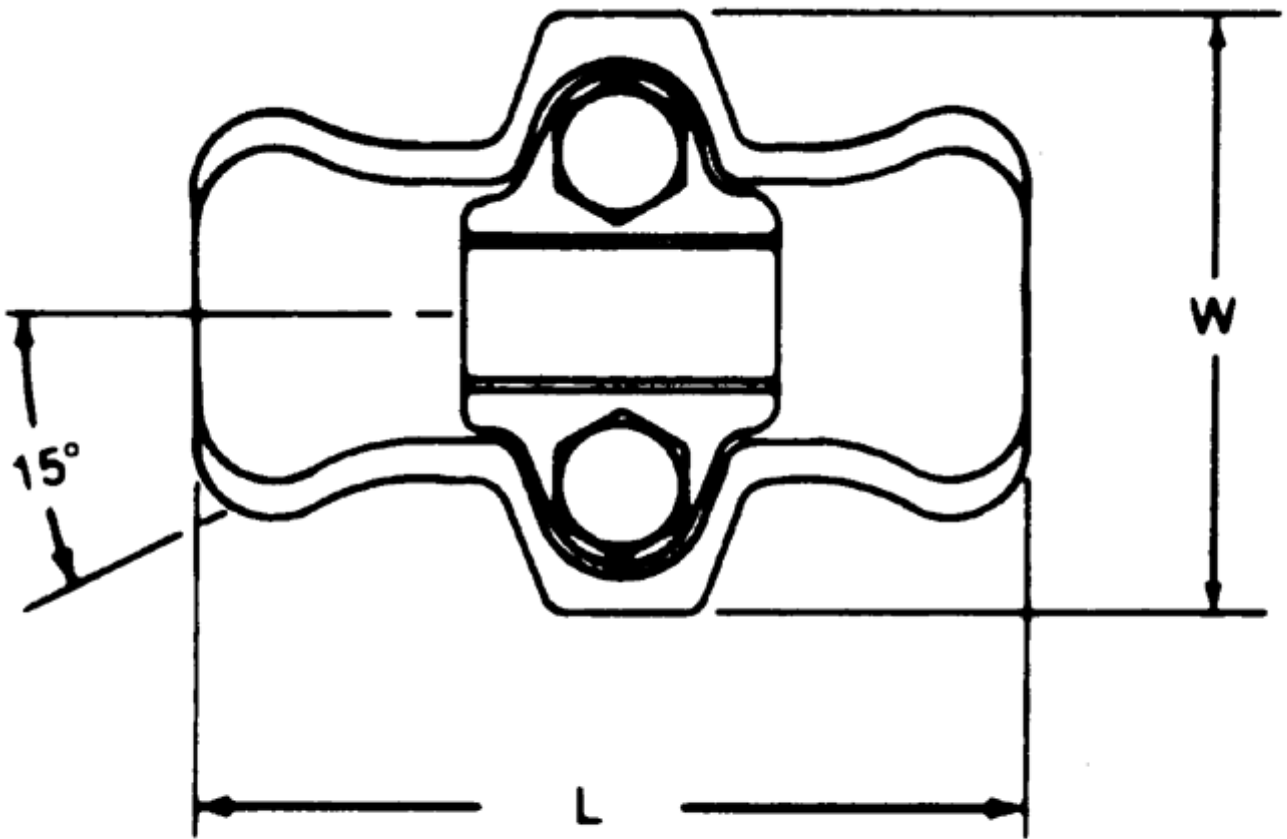

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.