



Fittings and Brackets

Special Application Fittings (continued)




AN-270




S204

Design Uniform Load/lbs.
A-1,200 650
A-1,400 500




S205

Design Uniform Load/lbs.
A-1,200 650
A-1,400 500

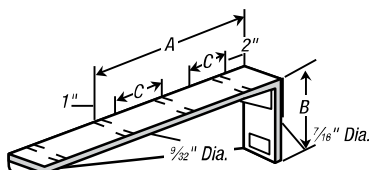


S-201-L and R

R as shown — L opposite hand.
12 ga. steel. Design Uniform Load/lbs.
A-1,200 250
A-1,400 200




S217

Design Uniform Load/lbs.
A-1,200 750
A-1,400 650




S218

Design Uniform Load/lbs.
A-1,200 750
A-1,400 650



TS-272

Track Support
Requires 3/8" x 2 1/2" bolt
and nut (not included).
Design load: 1,000 lbs.



TS273

Track Support
For uses over channel splice. Requires
3/8" x 2 1/2" bolt and nut (not included).
Design load: 2,000 lbs.

Standard Finish — GoldGalv®, unless otherwise stated.
Add EG suffix for SilverGalv® Finish

Standard Dimensions

- Hole Spacing: 1 1/8" From End
- Hole Spacing: 1 1/8" Centers
- Hole Size: 3/16" Diameter
- Material: 1 1/8" Width
- Material: 1/4" Thick

CAT. NO.	A (IN.)	B (IN.)	C (IN.)	STD. CTN.
S201-L6 or R6	6	1 1/16	3	25
S201-L8 or R8	8	2 1/16	5	25
S201-L10 or R10	10	2 3/16	7	5
S201-L12 or R12	12	3 1/16	3	5
S201-L14 or R14	14	3 3/16	4	5
S201-L16 or R16	16	4 1/16	5	15
S201-L18 or R18	18	4 3/16	6	5
S201-L20 or R20	20	5 1/16	7	10

CAT. NO.	A (IN.)	B (IN.)	STD. CTN.
AN-270-1	2 3/8	6	10
AN-270-2	4 3/8	8	10
AN-270-3	6 3/8	10	10
AN-270-4	8 3/8	12	15
AN-270-5	10 3/8	14	10