




Catamount®

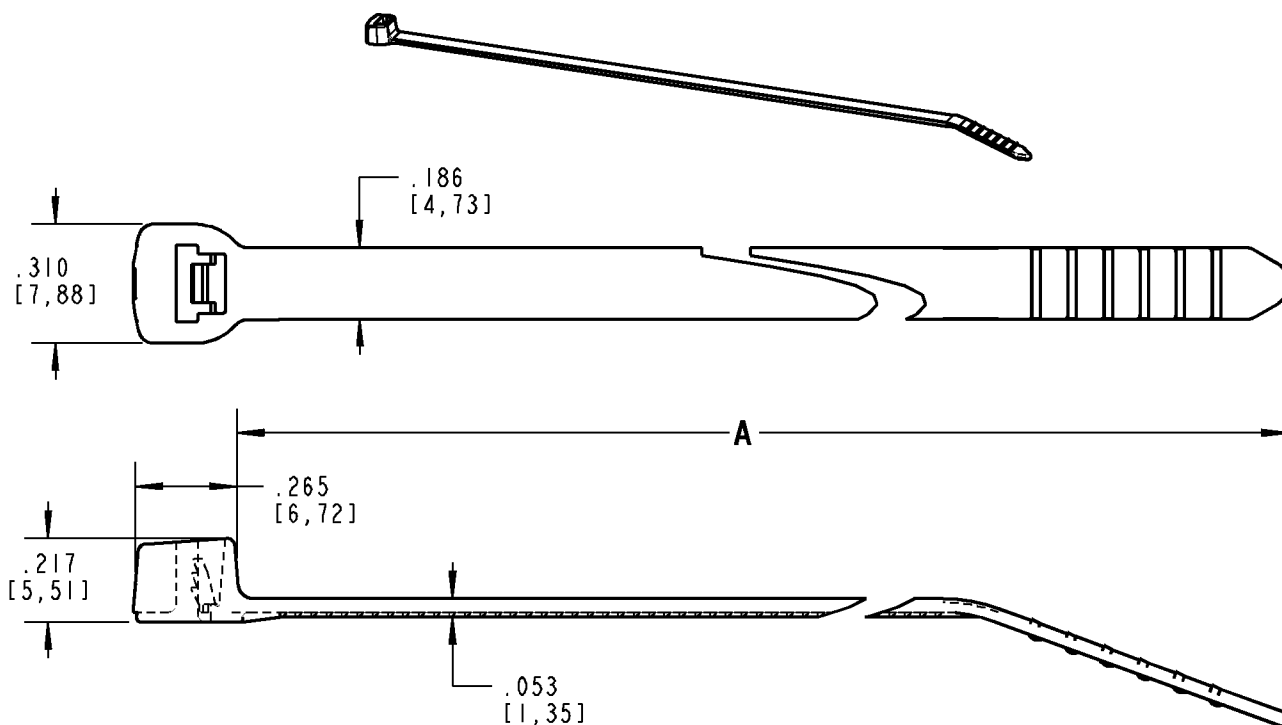

NOTES:

1. MATERIAL: HEAT STABILIZED NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 221°F [105°C]
4. MINIMUM TENSILE RATING: 50 LBS [222 N]
5. MINIMUM WIRE BUNDLE: .0625 [1,59]
6. MAXIMUM WIRE BUNDLE: SEE TABLE
7. INSTALLATION TOOL/SETTING: WT199/6-8 (MS90387-1) OR ERG299/6-8

CATALOG NUMBER	MAXIMUM WIRE BUNDLE	A
L-5-50HS-***	1.000 [25,4]	5.235 [132,97]
L-7-50HS-***	1.750 [44,45]	7.435 [188,85]
L-11-50HS-***	3.000 [76,2]	11.640 [295,66]
L-14-50HS-***	4.000 [101,6]	14.655 [372,24]

* = COLOR CODE- 0= BLACK (OUTDOOR)
9= NATURAL

** = PACKAGING- C= STD PKG (100) D= BULK PKG (500) M= BULK PKG (1,000)

CONSULT CUSTOMER SERVICE FOR PACKAGE QUANTITY AVAILABILITY

GENERAL NOTES		Thomas & Betts www.tnb.com			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.	2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.				
REVISIONS		DESCRIPTION: 5", 7", 11" & 14" SERIES 50 HEAT STABILIZED STANDARD CABLE TIES			
-	SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****	ORIGINAL PROJECT NO / (ERN NO) FM401182 / (2006127)	SHEET NO: 1 OF 1	REV. NO: -	DRAWING NO: WSD-000224