




[Catalog Home](#)

Product Datasheet

ANDERSON FARGO


G054 -- Spreader, Mid Span

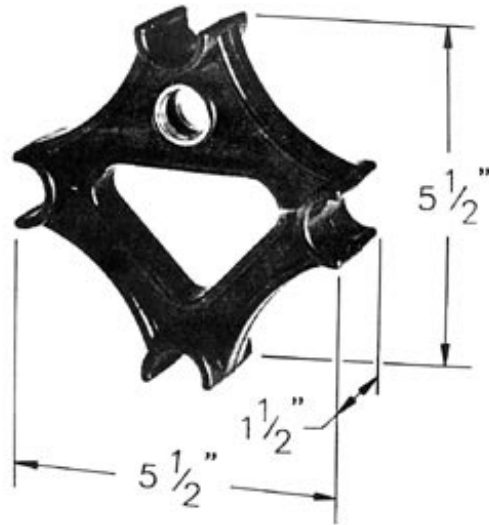

Polyethylene Spacer, 4 conductor

Product Specifications


Product Category

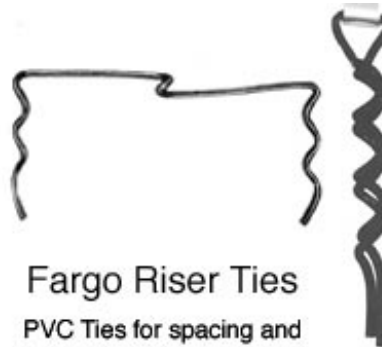

Fargo Riser Ties

PVC Ties for spacing and supporting covered conductor systems

Ties/Spacers Series

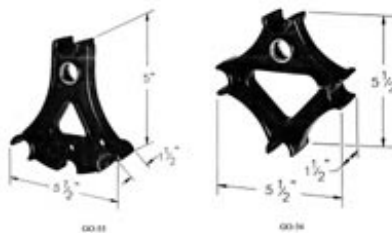

GO-50 Series

Conductor Spacer
Constructed from
Black Polyethylene

PDF Catalog Page

[Click HERE to view the web page.](#)

Type

Polyethylene Line Spacer 4 Conductor

Conductor Spacing

4.00 in (102 mm)

Covered Conductor Range

0.204 in (5 mm) - 0.85 in (22 mm)

Conductor Range Minimum

0.204 in (5 mm)

Conductor Range Maximum

0.85 in (22 mm)

Conductor Type

AAC, AAAC, ACAR, ACSR, CU or Compact

Body Material	Polyethylene
Ring Material	Stainless Steel
Material Type	Non-Standard
UPC Code	09635930408
Standard Package	100
Standard Package Unit	Each
Min Order Qty	100
Weight / Ea.	0.274 lbs

Notes

Conductor is attached via hand-tie to spacer.

Features

Sturdy Polyethylene frame provides conductor separation.

Compressed Product Number

G054



[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.