



Product Datasheet

ANDERSON FARGO

HAS162N -- Suspension Clamp



Suspension Clamp, Aluminum, for use with conductors 1.1 - 1.62 with fitting: None

Product Specifications

Series



**HAS series
Standard Voltage
Aluminum**

PDF Catalog Page

[Click HERE to view the web page.](#)

Fitting

None

Clamp Material

Aluminum

Fitting Catalog No.

-

Ultimate Body Strength

25,000 lbs (11,340 kgs)

Maximum Take-off Angle 0

22.5

Dimension H

3.08 in (78.2 mm)

Dimension J

0.500 in (12.7 mm)

Dimension L

9.50 in (241 mm)

Dimension W

1.81 in (46.0 mm)

Hardware Material

Galvanized Steel

Minimum - Maximum Conductor Size

AAC 954 kcmil (37) Thru AAC 750 kcmil (61) w/Armor Rods
AAAC 927.2 kcmil str (37) Thru AAAC 746.1 kcmil str (37) w/Armor Rods
ACSR 795.0 kcmil (26/7) Thru ACSR 666.6 kcmil (24/7) w/Armor Rods
ACAR 927.2 kcmil (24/13) Thru ACAR 739.8 kcmil (18/19)

Clamping Range

1.10 - 1.62 in (27.94 - 41.15 mm)

Voltage Application

Standard

Material Type

Non-Standard

UPC Code

09635931494

Standard Package

10

Standard Package Unit

Each

Min Order Qty


1

Weight / Ea.

3.724 lbs

Compressed Product Number

HAS162N

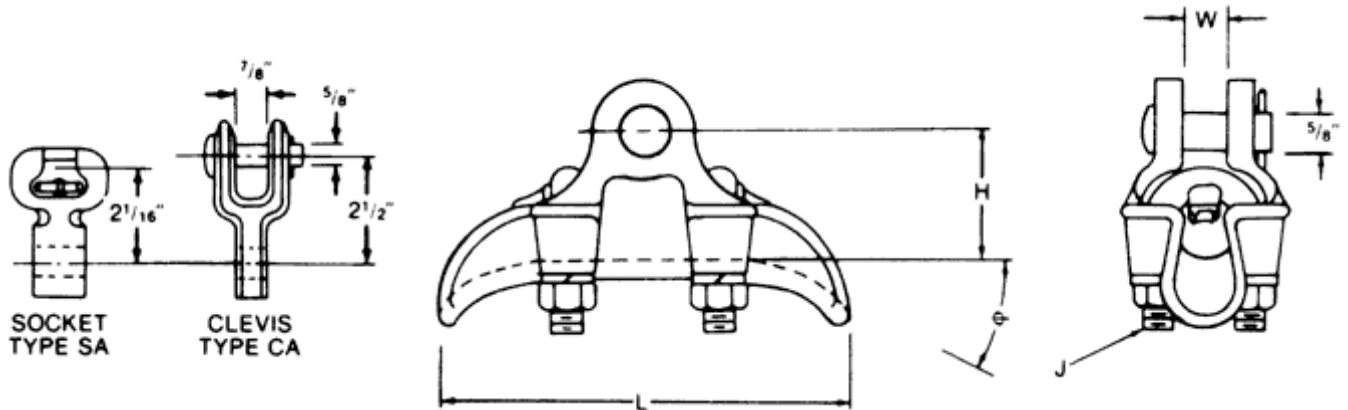

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.