



[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

GD407 -- Aluminum Automatic Dead End



Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .400 - .470" (10.15 - 11.94 mm), Flex Bail

Product Specifications

Category Image



Automatic Deadends

Copper and Aluminum
AAC, AAAC, ACAR, ACSR,
Copper & Copperweld®
Conductor

Series Image (Automatic)



GD-400 Series

Automatic Dead End

Flex Bail

**AAC, AAAC & ACSR
Conductor**

PDF Catalog Page

[Click HERE to view the web page.](#)

Bail Option

Flex Bail

Type

Automatic

Material

Aluminum

Inhibitor Loaded

Yes

Shell Material

High Strength Aluminum Alloy

Bail Material

Stainless Steel

Assembly Rating (Ultimate)

95% Conductor RBS

Dimension A

15.5 in

Dimension B

9.3 in

Dimension C

2.0 in (50 mm)

Diameter Range

.400 - .470 in (10.15 - 11.94 mm)

Color Code

Gray

Conductor Range Minimum - Maximum

AAC 2/0 str (7) Thru AAC 3/0 str (19)
AAAC 2/0 str(7)
ACSR 2/0 (6/1) Thru ACSR 101.8 kcmil (12/7)

Minimum Conductor Diameter

0.4


Maximum Conductor Diameter

0.47

Weight / Ea.	0.75 lbs
Standard Package	25
UPC Code	09635930873

Notes
 Add "N" suffix for Neoprene coated bail.

Compressed Product Number
 GD407

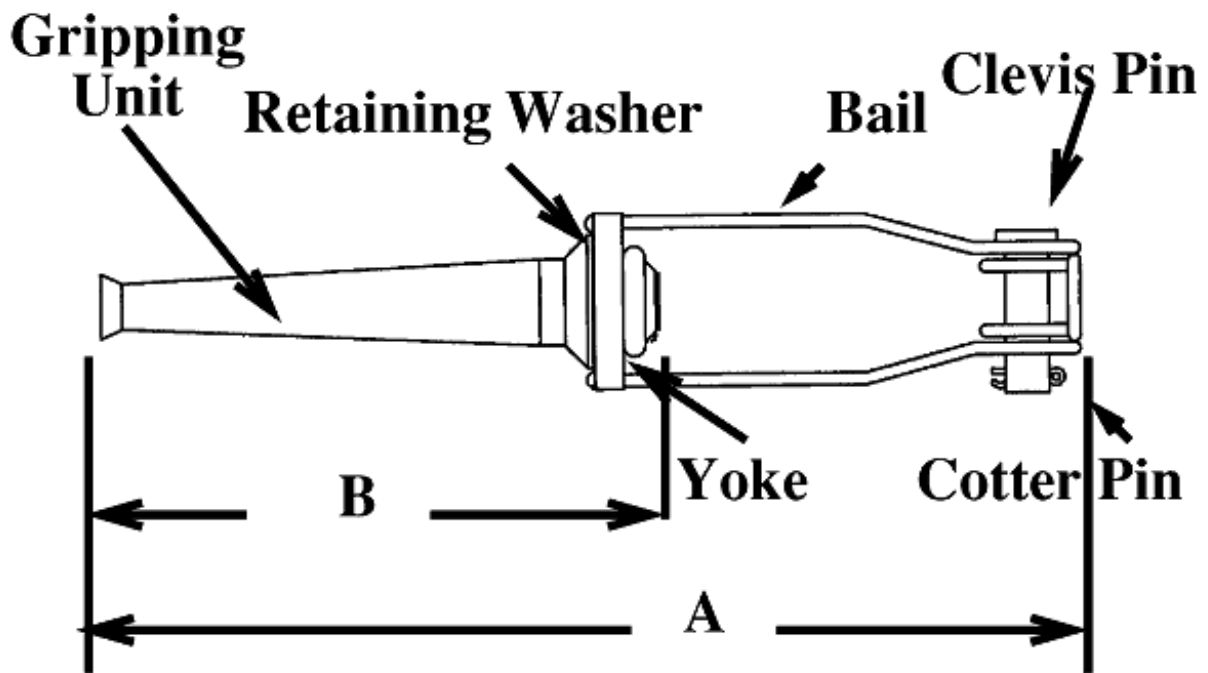

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.