



[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

GD408 -- Aluminum Automatic Dead End



Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .450 - .530" (11.43 - 13.46 mm), Flex Bail

Product Specifications

Category Image



Automatic Deadends

Copper and Aluminum
AAC, AAAC, ACAR, ACSR,
Copper & Copperweld®
Conductor

Series Image (Automatic)



GD-400 Series

Automatic Dead End

Flex Bail

**AAC, AAAC & ACSR
Conductor**

PDF Catalog Page

[Click HERE to view the web page.](#)

Bail Option

Flex Bail

Type

Automatic

Material

Aluminum

Inhibitor Loaded

Yes

Shell Material

High Strength Aluminum Alloy

Bail Material

Stainless Steel

Assembly Rating (Ultimate)

95% Conductor RBS

Dimension A

17.6 in

Dimension B

10 in

Dimension C

2.0 in (50 mm)

Diameter Range

.450 - .530 in (11.43 - 13.46 mm)

Color Code

Black

Conductor Range Minimum - Maximum

AAC 3/0 str (7) Thru AAC 4/0 str (19)
AAAC 3/0 str(7)
ACSR 101.8 kcmil (12/7) Thru ACSR 134.6 kcmil (12/7)

Minimum Conductor Diameter

0.45

Maximum Conductor Diameter

0.53


Weight / Ea.	1.14 lbs
Standard Package	25
UPC Code	09635930875

Notes

Add "N" suffix for Neoprene coated bail.

Compressed Product Number

GD408

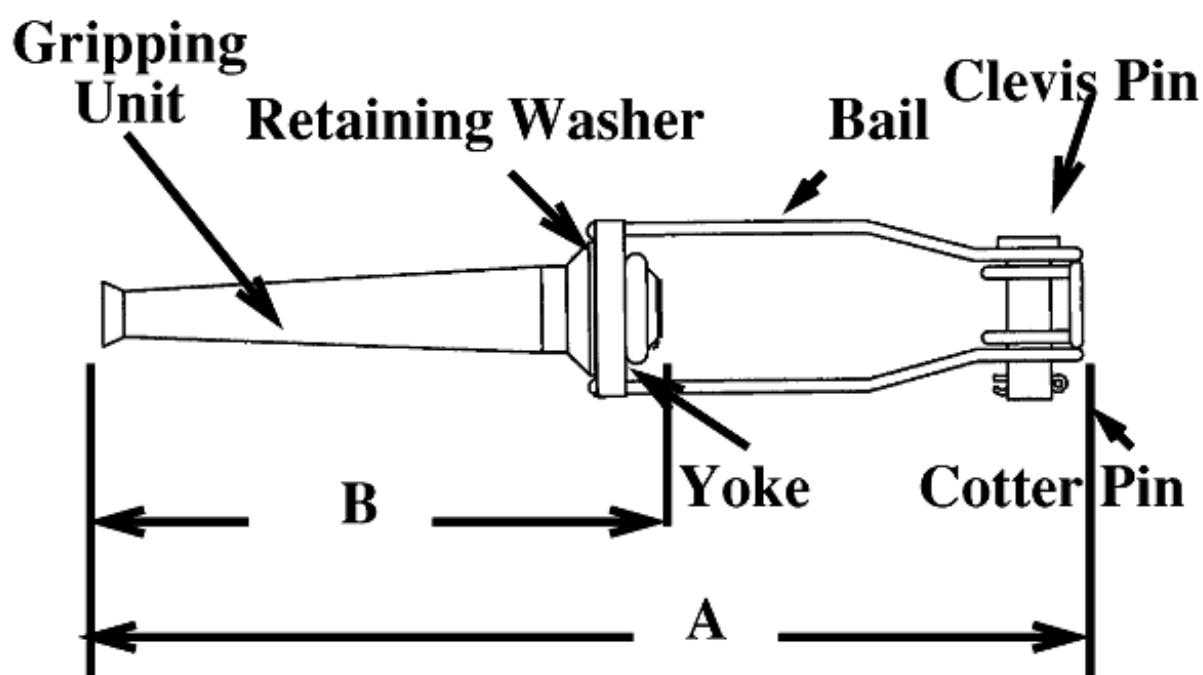

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.