




[Catalog Home](#)

**Product Datasheet**

**ANDERSON FARGO**

**GS932 -- Spacer, Secondary**

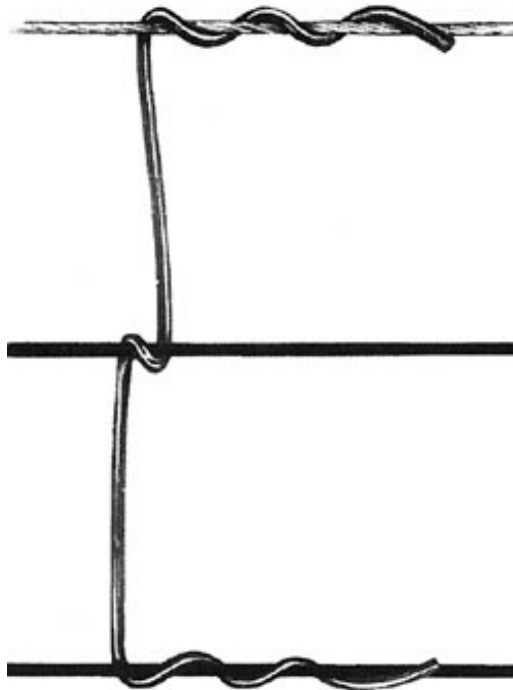

Three Conductor PVC Spacer, 8" Centers


**Product Specifications**

**Product Category**



**Fargo Riser Ties**  
PVC Ties for spacing and supporting covered conductor systems

**Ties/Spacers Series**

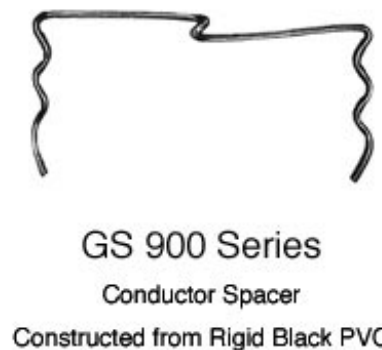

**GS 900 Series**  
Conductor Spacer  
Constructed from Rigid Black PVC

**Conductor Spacing**

8 in (203 mm)

**Covered Conductor Range**

0.257 - 0.523 in (6.5 - 13.3 mm)

**Conductor Range Minimum**

.257 in (6.5 mm)

**Conductor Range Maximum**

.523 in (13.3 mm)

<b>Conductor Type</b>	AAC, AAAC, ACAR, ACSR, CU or Compact
<b>Material</b>	Rigid Black PVC
<b>Color Code</b>	Black
<b>Dimension A</b>	8.5 in (216 mm)
<b>Dimension B</b>	16.88 in (430 mm)
<b>Dimension C</b>	0.38 in (10 mm)
<b>Dimension D</b>	8 in (204 mm)
<b>Material Type</b>	Standard
<b>UPC Code</b>	09635931367
<b>Standard Package</b>	100
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	100
<b>Weight / Ea.</b>	0.225 lbs

### Notes


Made from rigid PVC.

### Features

Once piece, No tools required for installation, Dielectric strength of 100V/mil.

### Compressed Product Number

GS932

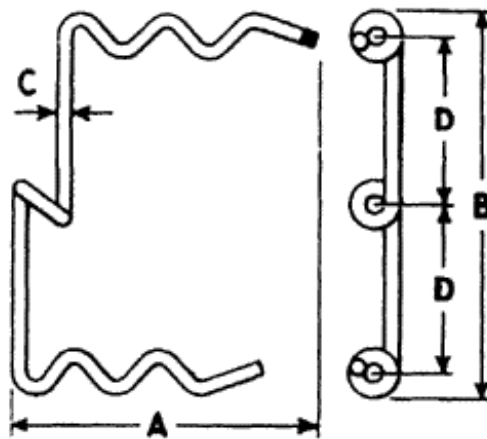

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.