



## 16,000 lb. Series Guy Strains - Clevis / Thimble-Eye

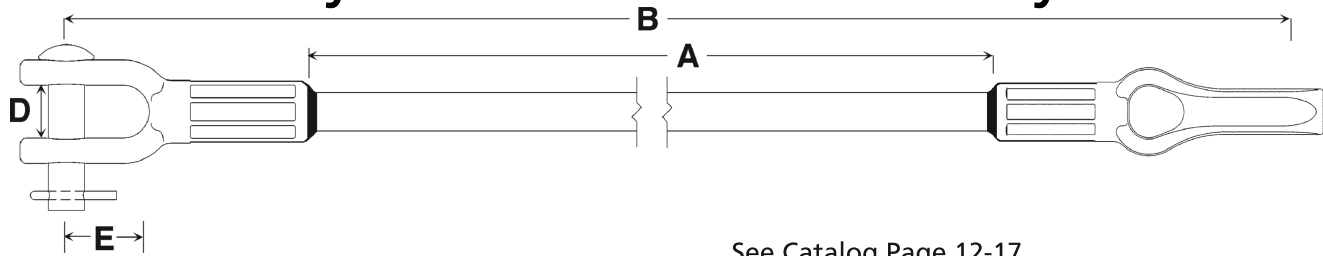

See Catalog Page 12-17  
For Roller and Pin details

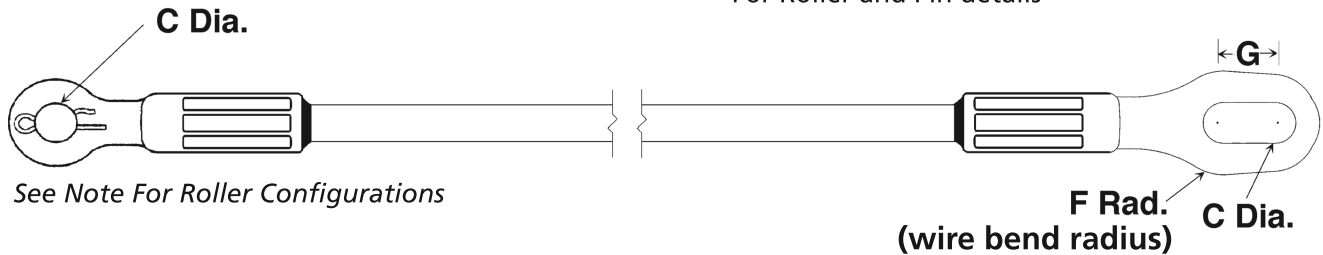

See Note For Roller Configurations

F Rad. (wire bend radius)  
C Dia.

C Dimension is 5/8" (16 mm) for 16,000 lbs. series  
D Dimension is 0.9" (23 mm) for 16,000 lbs. series  
E Dimension is 1.4" (36 mm) for 16,000 lbs. series  
G Dimension is 0.9" (23 mm) for 16,000 lbs. series

5/8" dia. Fiberglass rod.

Castings are hot-dip galvanized ductile iron.

**RUS Accepted.**

Catalog Number	Length A	Length B	Radius F	Weight (Each)
<b>16,000 lbs. (7258 kg) Minimum Ultimate Strength*</b>				
GS16012CP	12" (30.5 cm)	21.3" (54.1 cm)	0.75" (19 mm)	2.8 lbs. (1.3 kg)
GS16018CP	18" (45.7 cm)	27.3" (69.3 cm)	0.75" (19 mm)	2.9 lbs. (1.3 kg)
GS16024CP	24" (61.0 cm)	33.3" (84.6 cm)	0.75" (19 mm)	3.1 lbs. (1.4 kg)
GS16036CP	36" (91.4 cm)	45.3" (115.1 cm)	0.75" (19 mm)	3.3 lbs. (1.5 kg)
GS16042CP	42" (106.7 cm)	51.3" (130.3 cm)	0.75" (19 mm)	3.5 lbs. (1.6 kg)
GS16054CP	54" (137.2 cm)	63.3" (160.8 cm)	0.75" (19 mm)	3.7 lbs. (1.7 kg)
GS16078CP	78" (198.1 cm)	87.3" (221.7 cm)	0.75" (19 mm)	4.2 lbs. (1.9 kg)
GS16096CP	96" (243.8 cm)	105.3" (267.5 cm)	0.75" (19 mm)	4.6 lbs. (2.1 kg)
GS16120CP	120" (304.8 cm)	129.3" (328.4 cm)	0.75" (19 mm)	5.1 lbs. (2.3 kg)
GS16144CP	144" (365.8 cm)	153.3" (389.4 cm)	0.75" (19 mm)	5.6 lbs. (2.5 kg)

GS—CP series has No Roller as detailed in drawing

For 1 Roller, replace "CP" in number with "CP1"

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod

\*Recommended maximum working load is 50% of minimum ultimate ratings listed.

