

Pilot Lights (with LED lamp)

1. Select operator head type
2. Select pilot light lens type (plastic round dome or plastic fresnel)



Standard Pilot Light (with LED Lamp)		
Voltage	LED Lamp Color	Catalog No.
24 VAC/DC	○ White	9001SKP35LW
	● Green	9001SKP35LG
	● Red	9001SKP35LR
	● Yellow	9001SKP35LY
	● Blue	9001SKP35LL
	○ Clear	9001SKP35LW
	● Amber	9001SKP35LY
120 VAC	○ White	9001SKP38LW
	● Green	9001SKP38LG
	● Red	9001SKP38LR
	● Yellow	9001SKP38LY
	● Blue	9001SKP38LL
	○ Clear	9001SKP38LW
	● Amber	9001SKP38LY

Pilot Light Lens Type	Pilot Light Lens Color	Catalog No.
Plastic Dome	○ White	9001W9
	● Green	9001G9
	● Red	9001R9
	● Yellow	9001Y9
	● Blue	9001L9
	○ Clear	9001C9
	● Amber	9001W9
Plastic Fresnel	○ White	9001W31
	● Green	9001G31
	● Red	9001R31
	● Yellow	9001Y31
	● Blue	9001L31
	○ Clear	9001C31
	● Amber	9001A31

Push-to-Test Pilot Light (with LED Lamp)		
Voltage	LED Lamp Color	Catalog No.
24 VAC/DC	○ White	9001SKT38LW
	● Green	9001SKT35LG
	● Red	9001SKT35LR
	● Yellow	9001SKT35LY
	● Blue	9001SKT35LL
	○ Clear	9001SKT35LW
	● Amber	9001SKT35LY
120 VAC	○ White	9001SKT38LW
	● Green	9001SKT38LG
	● Red	9001SKT38LR
	● Yellow	9001SKT38LY
	● Blue	9001SKT38LL
	○ Clear	9001SKT38LW
	● Amber	9001SKT38LY

Pilot Light Lens Type	Pilot Light Lens Color	Catalog No.
Plastic fresnel	○ White	9001W31
	● Green	9001G31
	● Red	9001R31
	● Yellow	9001Y31
	● Blue	9001L31
	○ Clear	9001C31
	● Amber	9001A31

Plastic Legend Plates



Description	Catalog No.	Description	Catalog No.
Blank	9001KN200WP	Down	9001KN210WP
Start	9001KN201WP	Up	9001KN211WP
Stop	9001KN202RP	Fast	9001KN212WP
On	9001KN203WP	Slow	9001KN213WP
Off	9001KN204RP	Reset	9001KN223WP
Emergency Stop	9001KN205RP	Run	9001KN224WP
Forward	9001KN206WP	Off-On	9001KN244WP
Reverse	9001KN207WP	Stop-Start	9001KN255WP
Close	9001KN208WP	For-Off-Rev	9001KN259WP
Open	9001KN209WP	Hand-Off-Auto	9001KN260WP

Add-On Contact Blocks




Description	Catalog No.
1 N.O. + 1 N.C.	9001KA1
1 N.O.	9001KA2
1 N.C.	9001KA3

Selling Points

- Heavy-duty push buttons, selector switches and pilot lights for industrial applications
- Corrosion-resistant construction
- Oil tight, water tight and dust tight (rated for NEMA Types 4 and 13 environments without boots)
- Contact block terminals are at 20° angle to eliminate interference with other contact blocks mounted in tandem
- Fingersafe® terminals on contact blocks
- UL listed, CSA certified and CE marked

Simple Selector

30 mm Plastic Corrosion-Resistant Push Buttons, Selector Switches and Pilot Lights

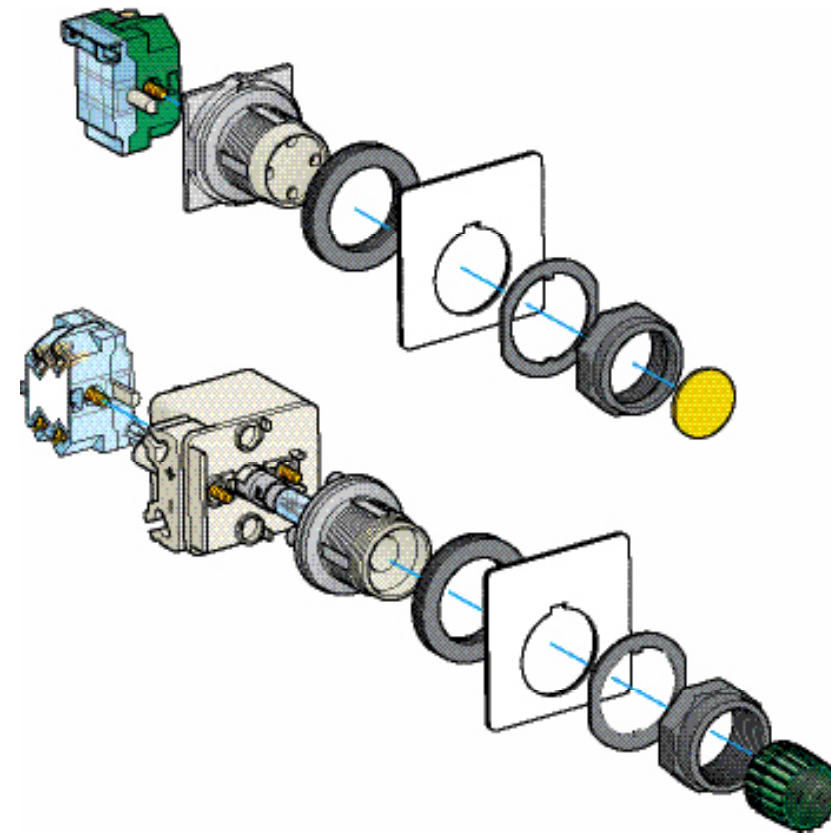

Non-illuminated Push Buttons

1. Select operator head type
2. Select contact blocks



Operator Head Type (without contact blocks)	Action	Color	Catalog No.
Full Guard	Momentary	● Red	9001SKR1R
		● Black	9001SKR1B
		● Green	9001SKR1G
Extended Guard	Momentary	● Red	9001SKR2R
		● Black	9001SKR2B
		● Green	9001SKR2G
No Guard	Momentary	● Red	9001SKR3R
		● Black	9001SKR3B
		● Green	9001SKR3G
2 Push Buttons (with interlocking mechanism)	Maintained	7-Color	9001SKR11U
Mushroom Head (screw-on) 1 3/8 in. (35 mm)	Momentary	● Red	9001SKR24R
		● Black	9001SKR24B
		● Green	9001SKR24G
Mushroom Head (screw-on) 2 1/4 in. (57 mm)	Momentary	● Red	9001SKR25R
		● Black	9001SKR25B
		● Green	9001SKR25G
Mushroom Head (snap-in) 1 3/8 in. (35 mm)	Momentary	● Red	9001SKR4R
		● Black	9001SKR4B
		● Green	9001SKR4G
Mushroom Head (snap-In) 2 1/4 in. (57 mm)	Momentary	● Red	9001SKR5R
		● Black	9001SKR5B
		● Green	9001SKR5G
2-Position Push-pull (screw-on) 1 3/8 in. (35 mm)	Momentary	● Red	9001SKR8R
		● Green	9001SKR8G
3-Position Push-pull (screw-on) 2 1/4 in. (57 mm)	Maintained	● Red	9001SKR9R
		● Green	9001SKR9G

Contact Block	Catalog No.
1 N.O. + 1 N.C.	9001KA1
1 N.O.	9001KA2
1 N.C.	9001KA3

Illuminated Push Buttons (with LED lamp)

1. Select operator head type
2. Select plastic fresnel lens
3. Select contact blocks

Operator Head Type	Voltage	Color	Catalog No.		
Full Guard	24 VAC/DC	○ White	9001SK1L35LW		
		● Green	9001SK1L35LG		
		● Red	9001SK1L35LR		
		● Blue	9001SK1L35LL		
		○ Clear	9001SK1L35LW		
		● Amber	9001SK1L35LY		
		120 VAC	○ White	9001SK1L38LW	
			● Green	9001SK1L38LG	
			● Red	9001SK1L38LR	
	● Blue		9001SK1L38LL		
	○ Clear		9001SK1L38LW		
	● Amber		9001SK1L38LY		
	No Guard		24 VAC/DC	○ White	9001SK2L35LW
				● Green	9001SK2L35LG
				● Red	9001SK2L35LR
		● Blue		9001SK2L35LL	
		○ Clear		9001SK2L35LW	
		● Amber		9001SK2L35LY	
120 VAC		○ White		9001SK2L38LW	
		● Green		9001SK2L38LG	
		● Red		9001SK2L38LR	
		● Blue	9001SK2L38LL		
		○ Clear	9001SK2L38LW		
		● Amber	9001SK2L38LY		

Plastic Fresnel Lens Color	Catalog No.
○ White	9001W31
● Green	9001G31
● Red	9001R31
● Blue	9001L31
○ Clear	9001C31
● Amber	9001A31

Contact Block	Catalog No.
1 N.O. + 1 N.C.	9001KA1
1 N.O.	9001KA2
1 N.C.	9001KA3

Non-Illuminated Selector Switch

1. Select operator head type
2. Select switch handle color
3. Select contact blocks



Operator Head Type		
Number of Positions	Lever Returns to	Operator Head Catalog No.
2-Positions	Maintained	9001SKS11
3-Positions	Maintained	9001SKS43

Handle Type	Handle Color	Catalog No.
Standard Length	● Black	9001B11
	● Green	9001G8
	● Red	9001R8
	● Yellow	9001Y8
	● Blue	9001B8
	○ White	9001W8
Extended Length	● Black	9001B25
	● Green	9001G24
	● Red	9001R24
	● Yellow	9001Y24
	● Blue	9001L24
	○ White	9001W24

Desired Contact Configuration			Contact Block Mounting Position	
Lever Position Left	Lever Position Center	Lever Position Right	Side 2 Catalog No.	Side 1 Catalog No.
Off	—	On	9001KA2	
Off	Off	On	9001KA2	
OR				
On	On	Off	9001KA3	



N.O. = Normally Open
N.C. = Normally Closed