



[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

SEDA1109NT -- Compression Deadend



Compression Deadend, Conventional 2-Die, Double Tongue, for ACSR 266.8 kcmil 18/1, With Terminal

Product Specifications

Category Image




**Compression
Deadend
Assemblies**

Aluminum

Conventional (two die)

AAC, ACSR, & ACSS
Conductor

Series Image (Comp Assy)

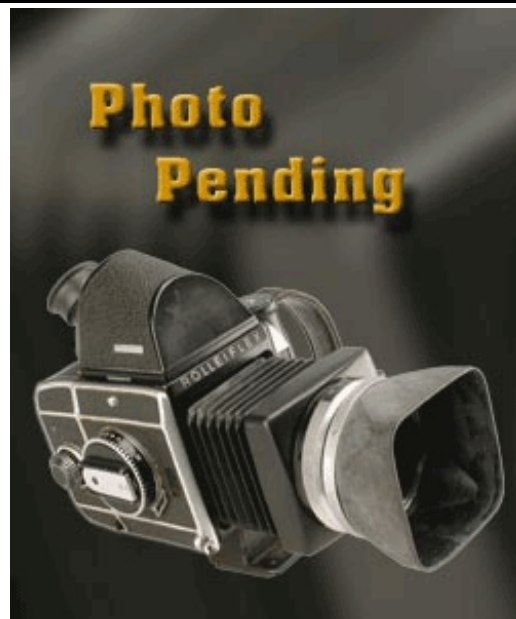


	Click HERE to view the web page.
Terminal Option	Without
Style	Conventional 2-Die, Single Tongue
Outside Diameter	0.642 in
Type	Compression
Material	Aluminum/Steel
Compression Method	Conventional (2 die system)
Aluminum Die	76AH
Steel Die	76SH
Minimum Press (Tons)	12
Voltage Application	Std
Inhibitor Loaded	No
Body Material	Seamless Extruded Aluminum Alloy
Eye Material	Galvanized Forged Steel
Hardware Material	Aluminum Alloy
Length before Compression	13.3 in (338 mm)
Dimension A	2.5 in (63 mm)
Dimension B	1.0 in (25 mm)
Dimension C	0.49 in (12.4 mm)
Pad Width	2.0 in (51 mm)
Bolt Holes	2
Conductor Range Minimum - Maximum	ACSR 266.8 kcmil (26/7) Partridge
Weight / Ea.	2.35 lbs
Standard Package	1
UPC Code	09635937627

Notes

To specify double-tongue deadend, change first character of Catalog Number from S to D.

Compressed Product Number

SEDA1109NT

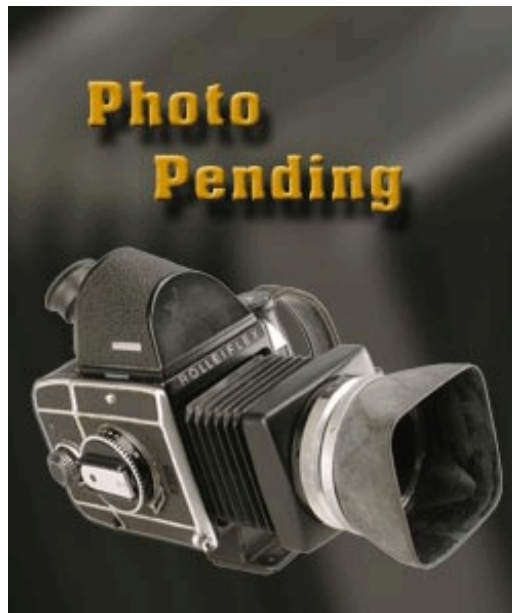

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.