



**POWER
SYSTEMS, INC.**

In the world of power transmission and distribution, look to Hubbell.

**Interactive
eCatalog**

[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

SEDA4418NT -- Compression Deadend



Compression Deadend, Conventional 2-Die, Single Tongue, for ACSR 1033.5 kcmil 45/7, Without Terminal

Product Specifications

Category Image




**Compression
Deadend
Assemblies**

Aluminum

Conventional (two die)

AAC, ACSR, & ACSS
Conductor

Series Image (Comp Assy)

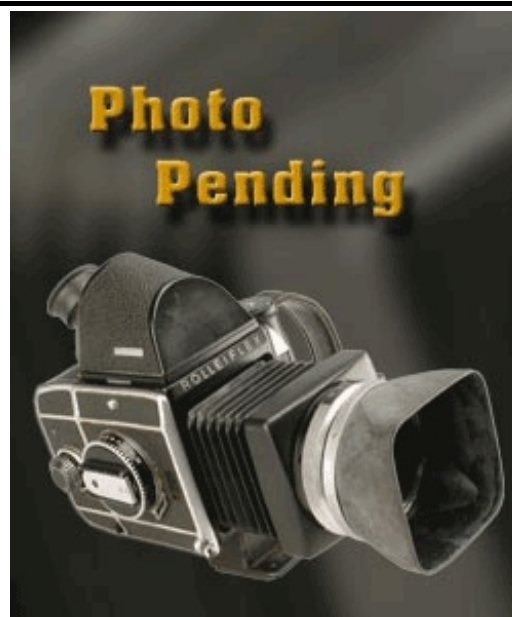


	Click HERE to view the web page.
Terminal Option	Without
Style	Conventional 2-Die, Single Tongue
Outside Diameter	1.212 in
Type	Compression
Material	Aluminum/Steel
Compression Method	Conventional (2 die system)
Aluminum Die	34AH
Steel Die	10SH
Minimum Press (Tons)	60
Voltage Application	EHV & Std
Inhibitor Loaded	No
Body Material	Seamless Extruded Aluminum Alloy
Eye Material	Galvanized Forged Steel
Hardware Material	Aluminum Alloy
Length before Compression	20.1 in (511 mm)
Dimension A	2.62 in (66.5 mm)
Dimension B	1.24 in (31.5 mm)
Dimension C	0.67 in (17.0 mm)
Pad Width	3.0 in (76 mm)
Bolt Holes	4
Conductor Range Minimum - Maximum	ACSR 1033.5 kcmil (45/7) Ortolan
Weight / Ea.	7.84 lbs
Standard Package	1
UPC Code	09635937464

Notes

To specify double-tongue deadend, change first character of Catalog Number from S to D.

Compressed Product Number

SEDA4418NT

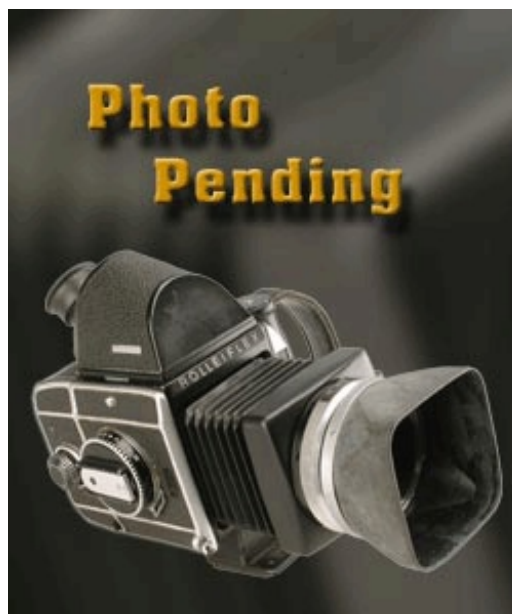

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.