



NEMA TYPE 3R ILLUSTRATED

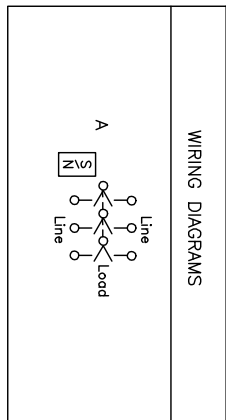

TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
200	300 KCMIL	# 6 AWG	AL/CU

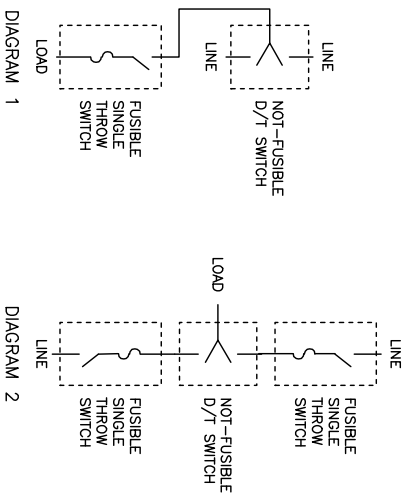

DUAL DIMENSIONS: INCHES MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS	KNOCKOUTS	
				TOP & BOTTOM	LEFT SIDE
DTU324NRB	240VAC	A	15 - 3Ø	(1) 1.25, 1.50, 2.00, 2.50 (2) 1.50, 2.00	(1) 1.00, 1.50, 2.00, 2.50

NOTES:  
 FINISH - GRAY BAKED ENAMEL  
 UL LISTED - FILE E-2875 CSA CERTIFIED - FILE # UL-89067  
 SUITABLE FOR USE AS SERVICE EQUIPMENT IN THE U.S.  
 SHORT CIRCUIT CURRENT RATING:  
 10,000 AMPERE WHEN PROTECTED BY CLASS H OR K FUSES.  
 82,000 AMPERE AND DTU DEVICES ARE QUICK-MAKE, QUICK-BREAK.  
 TOP OF NEMA TYPE 3R DEVICES HAVE PROVISIONS FOR MAXIMUM 2.50/[64] BOLT-ON HUB.

DOUBLE THROW SAFETY SWITCHES  
 200 AMPERE  
 ENCLOSURE - NEMA TYPE 3R RAINPROOF

DWG# 2198

