



Main

Product	Single Throw Safety Switch
Current Rating	400 A
Number of Poles	3
Voltage Rating	600 V AC/DC
Disconnect Type	Non-fusible disconnect
Short Circuit Current Rating	200 kA maximum
Mounting Type	Surface
Factory Installed Neutral	None
Electrical Connection	Lugs
Duty Rating	Heavy duty
Certifications	UL listed file E2875
Enclosure Rating	NEMA 3R galvanized steel
Wire Size	AWG 1/0...750 kcmil copper or aluminium

Complementary

Short-circuit withstand	200 kA
Maximum Horse Power Rating	125 Hp 240 V AC 50...60 Hz 3 phase NEC 430.52 250 Hp at 480 V AC 50...60 Hz for 3 phases motors conforming to NEC 430.52 350 Hp at 600 V AC 50...60 Hz for 3 phases motors conforming to NEC 430.52 50 Hp 250 V DC 50 hp 600 V DC
Tightening torque	62.14 N.m (AWG 1/0...750 kcmil)
Width	27.88 in (708.15 mm)
Height	50.31 in (1277.87 mm)
Maximum Depth	10.13 in (257.30 mm)

Ordering and shipping details

Category	00054 - H&HU SW,NEMA3R,400-1200A
Discount Schedule	DE1
GTIN	00785901450481
Nbr. of units in pkg.	1
Package weight(Lbs)	187 lb(US) (84.82 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	14.02 in (35.6 cm)
Package 1 width	28.31 in (71.9 cm)
Package 1 Length	51.50 in (130.8 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes
Halogen content performance	Halogen free plastic parts product


Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

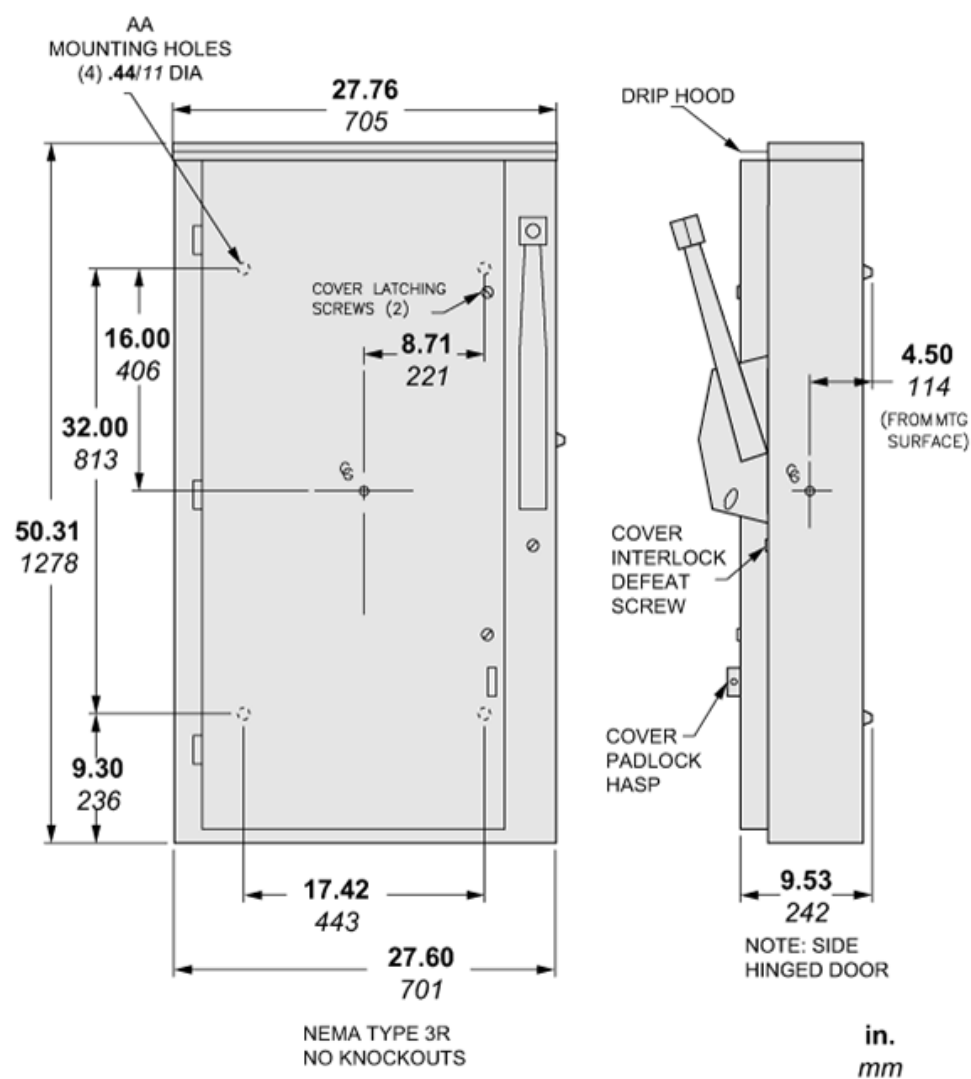

Wiring Diagrams

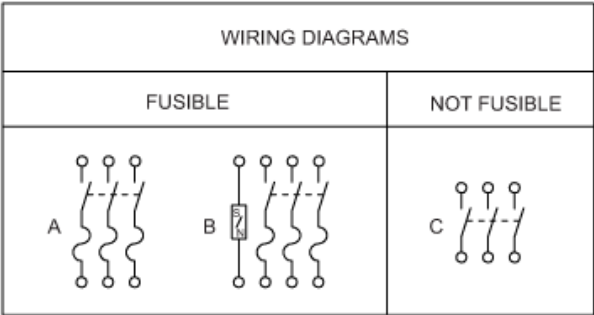

TERMINAL LUGS DATA			
AMPERE	MAX WIRE	MIN WIRE	TYPE
400	(1) 750 KCMIL	(1) #1/0 AWG	AL OR CU
	OR (2) 300 KCMIL	OR (2) #1/0 AWG	