


NEMA TYPE 1
NO KNOCKOUTS

NOTES:
 FINISH - GRAY BAKED ENAMEL
 UL LISTED - FILE E-154828
 ALL NEUTRALS - INSULATED GROUNDABLE
 SUITABLE FOR USE AS SERVICE EQUIPMENT
 SHORT CIRCUIT CURRENT RATINGS:
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R FUSES HAVING
 CLASS R REJECTION KITS INSTALLED OR CLASS J FUSES.
 * FOR GROUNDED "B" PHASE SYSTEMS ONLY AND WITH SOLID NEUTRAL ASSEMBLY INSTALLED.
 ■ NEUTRAL ASSEMBLY H600SN MUST BE USED FOR 480VAC, 3 PHASE, GROUNDED "B" PHASE RATING.

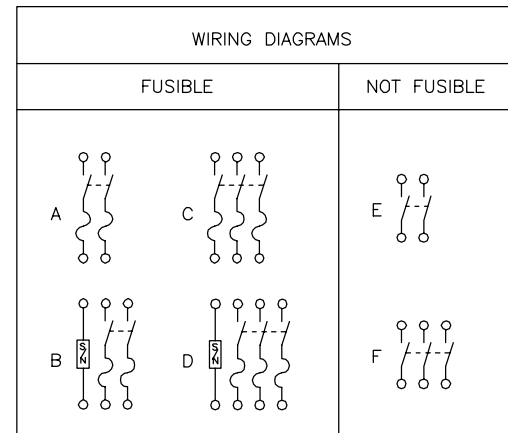

TERMINAL LUGS DATA			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
600	(2) 500 KCML	(2) #3/0 AWG	AL OR CU

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS							
			240VAC		480VAC		600VAC		250 VDC	600 VDC
			STD.	MAX.	STD.	MAX.	STD.	MAX.		
H226	240VAC;250VDC	A	75 *	200*	-	-	-	-	50	-
H226N	240VAC;250VDC	B	75 *	200*	-	-	-	-	50	-
H266	600VAC;600VDC	A	-	-	150 ■	400 ■	-	-	50	50
H326	240VAC	C	75	200	-	-	-	-	50	-
H326N	240VAC	D	75	200	-	-	-	-	50	-
H366	600VAC	C	-	-	150	400	200	500	50	50
H366N	600VAC	D	-	-	150	400	200	500	50	50
HU266	600VAC;600VDC	E	-	-	-	-	-	-	50	50
HU366	600VAC	F	-	200	-	400	-	500	50	50

HEAVY DUTY SAFETY SWITCHES
 VISIBLE BLADE TYPE
 600 AMPERE
 ENCLOSURE - NEMA TYPE 1 GENERAL PURPOSE



DWG# 1928
NO.