


NEMA TYPE 1  
ILLUSTRATED

NOTES: FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.  
 UL LISTED - FILE E-2875  
 ALL NEUTRALS - INSULATED GROUNDABLE  
 SUITABLE FOR USE AS SERVICE EQUIPMENT  
 SHORT CIRCUIT CURRENT RATINGS:  
 • 10,000 AMPERES.  
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.  
 100,000 AMPERES WITH CLASS R FUSES.  
 \* FOR CORNER GROUNDED DELTA SYSTEMS.  
 ■ PLUG FUSES  
 ‡ LUGS SUITABLE FOR 60°C OR 75°C CONDUCTORS.

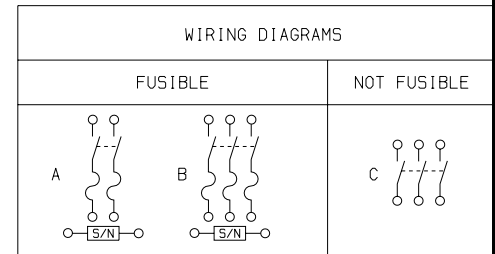

TERMINAL LUGS‡			
AMPERES	MAX. WIRE #	MIN. WIRE #	TYPE
30	# 6 AWG	# 12 AWG	AL
	# 6 AWG	# 14 AWG	CU

KNOCKOUTS				
SYMBOL	A	B	C	D
CONDUIT SIZE	.50	.75	1	1.25

DUAL DIMENSIONS: INCHES  
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS						
			120VAC		240VAC				
			STD.	MAX.	STD.	3Ø	1Ø	MAX.	
D211N ■ ■	240VAC	A	1/2	2	1 1/2	-	3	-	-
D221N	240VAC	A	-	-	1 1/2	-	3	7 1/2*	-
D321N	240VAC	B	-	-	1 1/2	-	3	7 1/2	-
DU321	240VAC	C	-	-	-	-	3	7 1/2	-

GENERAL DUTY SAFETY SWITCHES  
 VISIBLE BLADE TYPE  
 30 AMPERE  
 ENCLOSURE - NEMA TYPE 1 GENERAL PURPOSE

**SQUARE D COMPANY**

DWG. NO. 1851