



NEMA TYPE 1

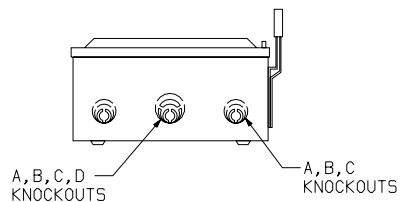

TERMINAL LUGS ‡			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	# 2 AWG # 2 AWG	#10 AWG #14 AWG	AL CU

KNOCKOUTS				
SYMBOL	A	B	C	D
CONDUIT SIZE	.50	.75	1	1.25

NOTES: FINISH - GRAY BAKED ENAMEL
 UL LISTED - FILE E-2875
 ALL NEUTRALS - INSULATED GROUNDABLE
 SUITABLE FOR USE AS SERVICE EQUIPMENT
 SHORT CIRCUIT CURRENT RATINGS:
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
 100,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R FUSES.
 ‡ LUGS SUITABLE FOR 60°C OR 75°C COPPER OR ALUMINUM CONDUCTORS.

DUAL DIMENSIONS: INCHES
 MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS	
			240VAC	
			MAX.	
DU322	240VAC	A	10	15

GENERAL DUTY SAFETY SWITCHES
 VISIBLE BLADE TYPE
 60 AMPERE
 ENCLOSURE - NEMA TYPE 1 GENERAL PURPOSE

SQUARE D COMPANY

DWG. NO. 1856