


SEISMIC NOTES:
 USE (4) 1/4" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES AA
 MAX CONFIGURED WEIGHT 18 LB FOR THE PURPOSE OF DETERMINING
 SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,
 CONTACT SQUARE D COMPANY.

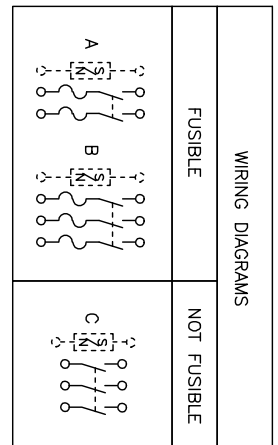

TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	# 4 AWG	# 14 AWG	CU

KNOCKOUTS					
SYMBOL	C	D	E	F	
CONDUIT SIZE	1	1.25	1.50	2	

CATALOG NUMBERS				HORSEPOWER RATINGS											
NEMA TYPE 12K WITH KNOCKOUTS	NEMA TYPE 12 WITHOUT KNOCKOUTS	NEMA TYPE 12K VIEWING WINDOW WITH KNOCKOUTS	NEMA TYPE 12 WITHOUT KNOCKOUTS	240VAC		480VAC		600VAC		250 VDC	600 VDC				
VOLTAGE RATINGS	AMPERE RATING	WIRING DIAG.		STD.	MAX.	STD.	MAX.	STD.	MAX.	STD.	MAX.				
H361-2A H362A HU362A	H361-2AWK H362AWK HU362AWK	H362AW HU362AW	H362AWKW HU362AWKW	600VAC;600VDC 600VAC;600VDC 600VAC;600VDC	30 60 60	B B C	10 30 10	10 30 10	5 15 20	5 15 20	15 30 50	7 1/2 15 30	10 20 30	10 20 30	10 20 30

NOTES:
 FINISH - GRAY BAKED ENAMEL.
 UL LISTED - FILE E-2875
 ALL NEUTRALS - INSULATED GROUNDBAR
 SUITABLE FOR USE AS SERVICE EQUIPMENT
 SHORT CIRCUIT CURRENT RATINGS:
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R OR J FUSES.
 WHEN MOUNTING THESE SWITCHES, ALLOW 4.00[102] MIN. CLEARANCE
 BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.
 * NOT APPLICABLE FOR CORNER GROUNDED DELTA.
 * IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

HEAVY DUTY SAFETY SWITCHES - SEISMIC
 VISIBLE BLADE TYPE
 30-60 AMPERE - SERIES F5
 ENCLOSURE - NEMA TYPE 12

DWG# 1896S

