


TERMINAL LUGS ▲			
AMPERES	MAX WIRE	MIN WIRE	TYPE
200	250 KCMIL	#6 AWG	CU/AL

KNOCKOUTS ‡		
SYMBOL	CONDUIT SIZE	
	IN	MM
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64

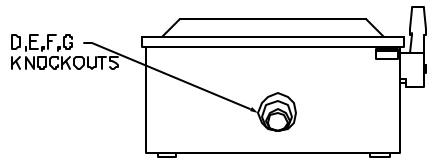

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER		VOLTAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS													
NEMA TYPE 12K WITH KNOCKOUTS	NEMA TYPE 12 WITHOUT KNOCKOUTS			240VAC				480VAC				600VAC		250 VDC	600 VDC		
				STD	MAX	STD	MAX	STD	MAX	STD	MAX	STD	MAX				
H224A	H224AWK	240VAC;250VDC	A	15	25&	—	60&	—	—	—	—	—	—	—	40~	—	
H324A	H324AWK	240VAC;250VDC	B	15^	25&	—	60&	—	—	—	—	—	—	—	40~	—	
H364A	H364AWK	600VAC;600VDC	B	16^	25&	—	60&	25^	50&	80^	125&	30^	60	50^	100	40^	50^
H364NA	H364NAWK	600VAC;600VDC	D	15^	25#	—	60#	25^	50#	50^	125#	30^	60	50^	150	40^	50^
HU364A	HU364AWK	600VAC;600VDC	C	—	—	15^	60&	—	—	50^	125&	—	—	50^	150	40^	50^

NOTES:
 FINISH — GRAY BAKED ENAMEL
 UL LISTED — FILE E-7872
 ALL NEUTRALS — INSULATED GROUNDABLE
 SUITABLE FOR USE AS SERVICE EQUIPMENT
 SHORT CIRCUIT CURRENT RATINGS:
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R OR J FUSES.
 ON 600V SWITCHES, 100,000 AMPERE, MAX DN CORNER GROUNDED DELTA
 WHEN PROTECTED BY CLASS R OR J FUSES.
 WHEN MOUNTING THESE SWITCHES, ALLOW 4.00 [102] MIN CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.
 ‡ KNOCKOUT DATA APPLICABLE TO NEMA TYPE 12K SWITCHES ONLY
 ▲ LUGS SUITABLE FOR 75°C CONDUCTORS
 # IF CORNER GROUNDED DELTA, USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.
 & IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLE FOR UNGROUNDED CONDUCTORS.
 ~ USE ANY TWO SWITCHING POLES.

HEAVY DUTY SAFETY SWITCHES
 VISIBLE BLADE TYPE
 200 AMPERE — SERIES F6
 ENCLOSURE — NEMA TYPE 12, 12K INDUSTRIAL

SQUARE D COMPANY

DWG# 3233
NO.