



TERMINAL LUGS ‡			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	# 2 AWG	# 12 AWG	AL
	# 2 AWG	# 14 AWG	CU

KNOCKOUTS				
SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	45
E	1.50	38	2.00	51
F	2.00	51	2.50	64

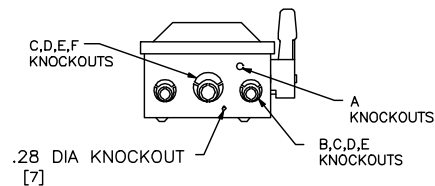

NEMA TYPE 1

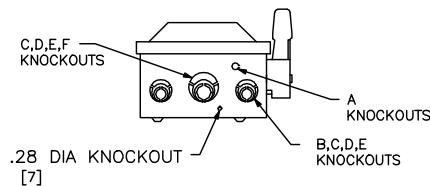

NEMA TYPE 3R▲

DUAL DIMENSIONS: INCHES
MILLIMETERS

SEISMIC NOTES:
USE (4) 1/4" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES AA
MAX CONFIGURED WEIGHT 20 LB FOR THE PURPOSE OF DETERMINING
SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,
CONTACT SQUARE D COMPANY.

NOTES:
FINISH - GRAY BAKED ENAMEL.
UL LISTED - FILE E-2875
ALL NEUTRALS - INSULATED GROUNDABLE
SUITABLE FOR USE AS SERVICE EQUIPMENT
SHORT CIRCUIT CURRENT RATINGS:

10,000 AMPERES WITH CLASS H OR K FUSES
200,000 AMPERES WITH CLASS R FUSES HAVING CLASS R REJECTION KITS OR CLASS J FUSES.
WHEN MOUNTING THESE SWITCHES, ALLOW 4.00/[102] MIN. CLEARANCE
BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.

▲ NEMA TYPR 3R SWITCHES HAVE PROVISIONS FOR MAXIMUM 2.50/[64] BOLT-ON B-HUB.
‡ LUGS SUITABLE FOR 60°C OR 75°C COPPER OR ALUMINUM CONDUCTORS.

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS										
			250VAC			480VAC			600VAC			250 VDC	600 VDC
			STD	MAX		STD	MAX		STD	MAX			
H362	600VAC;600VDC	A	-	-	-	15	-	30	15	-	50	-	30
H362RB	600VAC;600VDC	A	-	-	-	15	-	30	15	-	50	-	30
H362N	600VAC;600VDC	B	-	-	-	15	-	30	15	-	50	-	-
H362NRB	600VAC;600VDC	B	-	-	-	15	-	30	15	-	50	-	-
HU362	600VAC;600VDC	C	-	10	20	-	20	50	-	25	60	10	30
HU362RB	600VAC;600VDC	C	-	10	20	-	20	50	-	25	60	10	30

HEAVY DUTY SAFETY SWITCHES - SEISMIC
VISIBLE BLADE TYPE
60 AMPERE
ENCLOSURE - NEMA TYPE 1 GENERAL PURPOSE
NEMA TYPE 3R RAINPROOF



DWG# 1897S
NO.