

Product availability : Stock - Normally stocked in distribution facility



Price\* : 116.00 USD



### Main

Range of product	Harmony 9001K Harmony 9001SK
Product or component type	Light block
Device short name	9001K
Bulb base	BA 9s
Light block supply	Direct via integral transformer (6 V)

### Complementary

Product weight	0.32 lb(US) (0.144 kg)
Light source	Incandescent
[Us] rated supply voltage	230 V AC

### Environment

Protective treatment	TC
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	-13...158 °F (-25...70 °C)
IP degree of protection	IP20 conforming to IEC 60529
Standards	JIS C 852 EN/IEC 60947-5-4 CSA C22.2 No 14 JIS C 4520 UL 508 EN/IEC 60947-1 EN/IEC 60947-5-1
Product certifications	UL 508 NEMA
Electrical shock protection class	Class II conforming to IEC 61140
Vibration resistance	7 gn (f = 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn conforming to IEC 60068-2-27

## Ordering and shipping details

Category	21435 - 9001 KM LIGHT MODULES
Discount Schedule	CS1
GTIN	00785901725435
Nbr. of units in pkg.	1
Package weight(Lbs)	0.33000000000000002
Returnability	Y
Country of origin	MX

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0921 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations


## Contractual warranty

Warranty period	18 months
-----------------	-----------

---

Dimensions

---

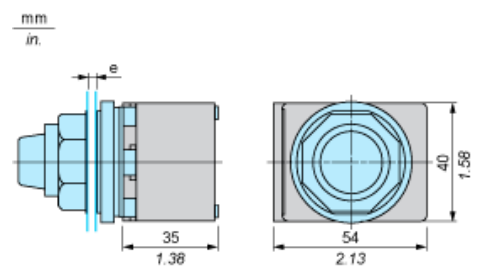

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.