




Product Datasheet


ANDERSON FARGO

JTF13 -- Compression Terminal

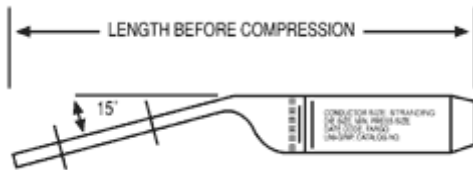

Compression Terminal, Uni-Grip, Jumper Terminal, 15 degree, Conductor Range, Range 1.141-1.235

Product Specifications

<p>Series</p>	 <p>JTF Series</p> <p>Compression Terminal 15 degree, Partial Tension AAC, AAAC, ACAR & ACSR Conductor</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>Conductor Range (in)</p>	<p>1.141-1.235</p>
<p>Length before Compression</p>	<p>12.2 in (309 mm)</p>
<p>Pad Width</p>	<p>3.0 in (76 mm)</p>
<p>Pad Holes</p>	<p>4</p>
<p>Compression Method</p>	<p>Uni-Grip (single die)</p>
<p>Material & Connection Method</p>	<p>Aluminum Compression</p>
<p>Die Size</p>	<p>13CD</p>
<p>Minimum Press (Tons)</p>	<p>60</p>
<p>Voltage Application</p>	<p>EHV & Std</p>
<p>Inhibitor Loaded</p>	<p>Yes</p>
<p>Conductor Minimum - Maximum Range</p>	<p>AAC 1000 kcmil (61) thru AAC 1113 kcmil (61) ACSR 874.5 kcmil (54/7) thru ACSR 1033.5 kcmil (45/7)</p>
<p>Material Type</p>	<p>Non-Standard</p>
<p>UPC Code</p>	<p>09635940117</p>
<p>Standard Package</p>	<p>1</p>
<p>Standard Package Unit</p>	<p>Each</p>
<p>MOQ</p>	<p>1</p>
<p>Weight / Ea.</p>	<p>2.303 lbs</p>

Notes


To specify stainless steel hardware add "SS" suffix to catalog number.

Features

Jumper terminals are prefilled with inhibitor. Taper and pad are coated with protective strippable plastic and bore is capped. Tongue holes have NEMA spacing. Standard hardware includes one Aluminum 1/2-13 bolt, nut and two aluminum washers per .56 diameter hole.

Compressed Product Number

JTF13

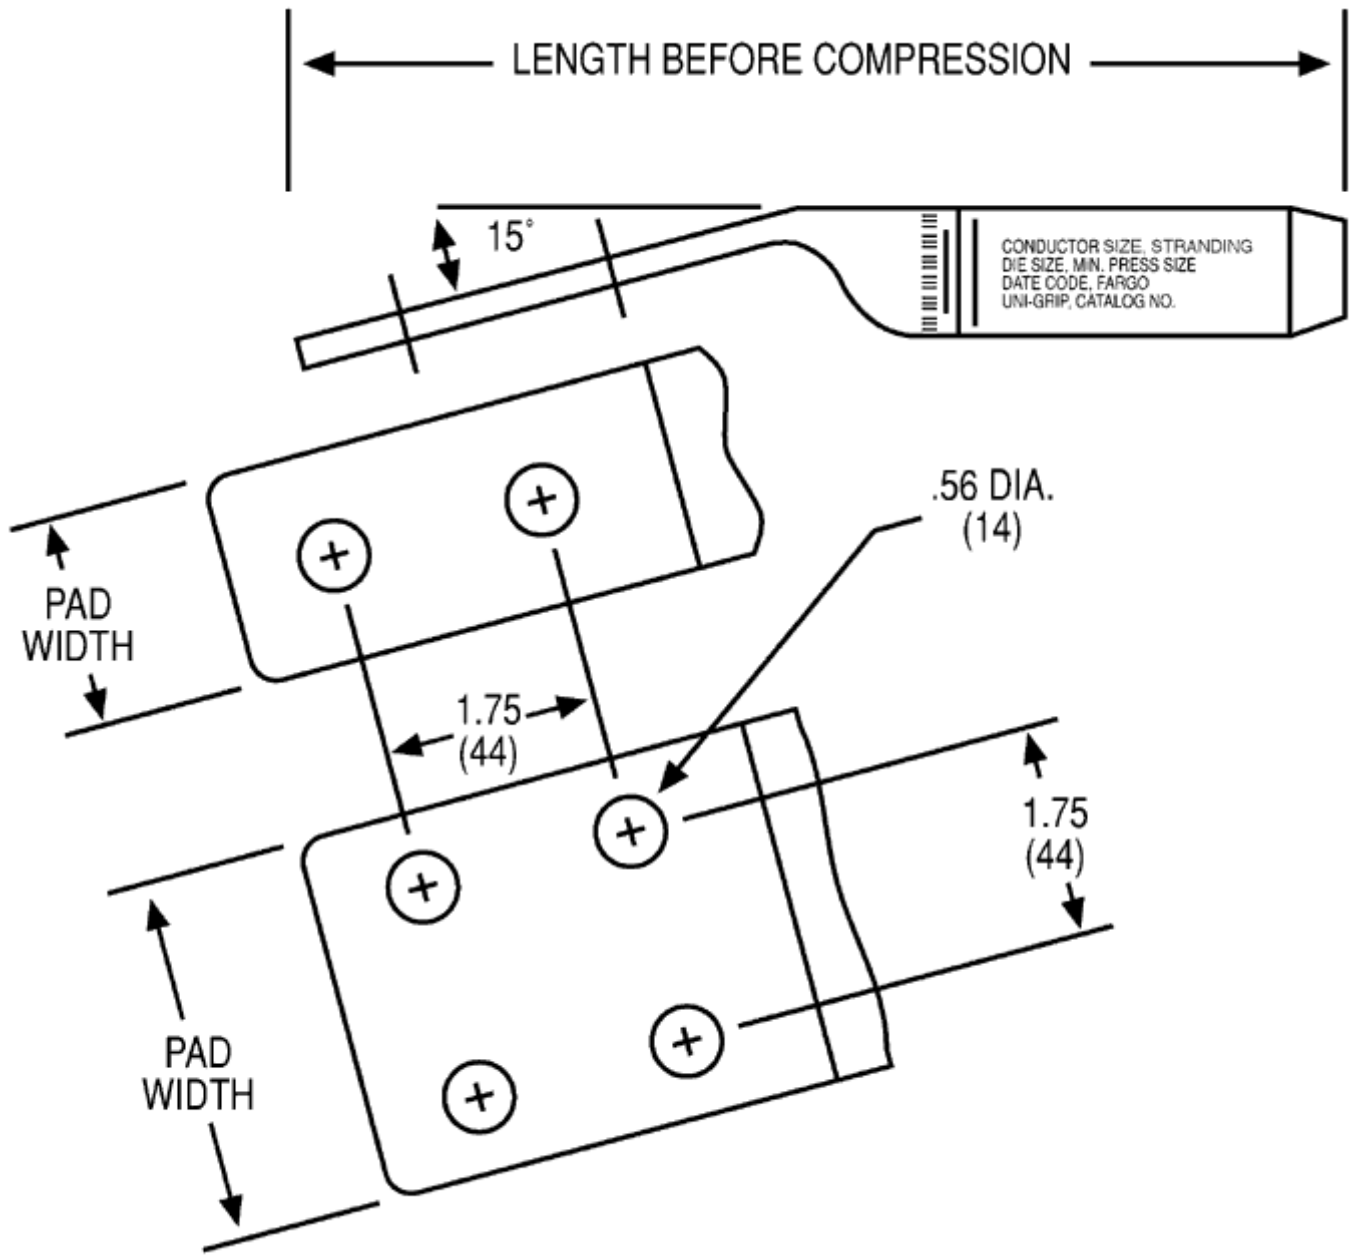

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.