




Product Datasheet

ANDERSON FARGO

FTA10 -- Full Tension Splice

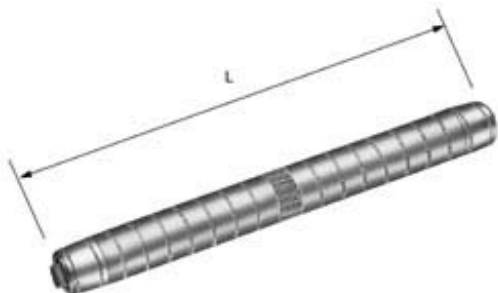

Full Tension Aluminum splice for stranded all aluminum conductor

Product Specifications

Splice Type



**VERSAtile™
Compression Splices**
(For use with Die type
and VersaCrimp tools)

Versatile Compression Series



**FTA Series
Compression Splice**
Full Tension
AAC Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

Conventional Tooling Conductor Size Minimum

0.336 in

Conventional Tooling Conductor Size Maximum

0.373 in

Material

Aluminum

Conventional Tooling Minimum Conductor

.336 in

Conventional Tooling Maximum Conductor

.373 in

Conventional Tooling Conductor Size

1/0 (7,19) Str.

Dimension L

7.25 in (184 mm)

Length before Compression

7.25 in (184 mm)

Compression Method

Conventional Die Tooling

Die Size

Burndy 243 or EEI-8A

UL Listed

No

Inhibitor Loaded

Yes

Material Type	Non-Standard
UPC Code	09635930379
Standard Package	25
Standard Package Unit	Each
Min Order Qty	25
Weight / Ea.	0.196 lbs

Notes

For full tension splicing of AAC. Installs with popular dies from several manufacturers, use type FTR for ACSR, ACAC or AAAC.

Features

Has positive center stop and tapered ends.

Compressed Product Number

FTA10

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.