
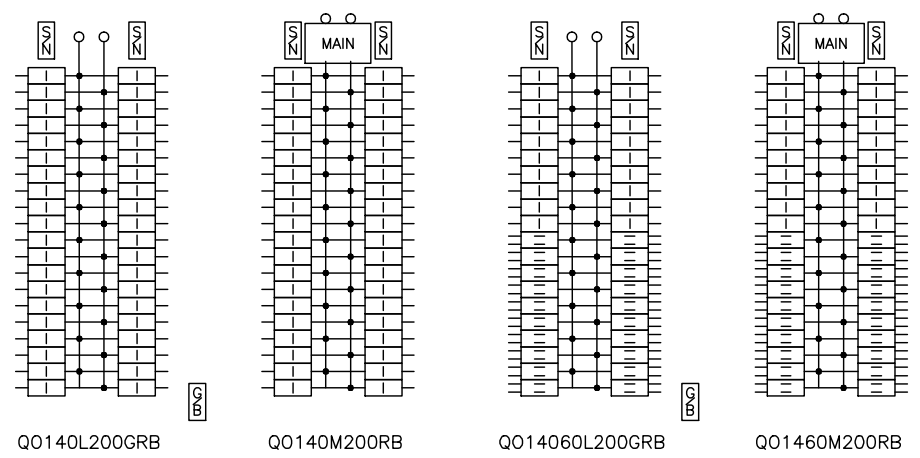


KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

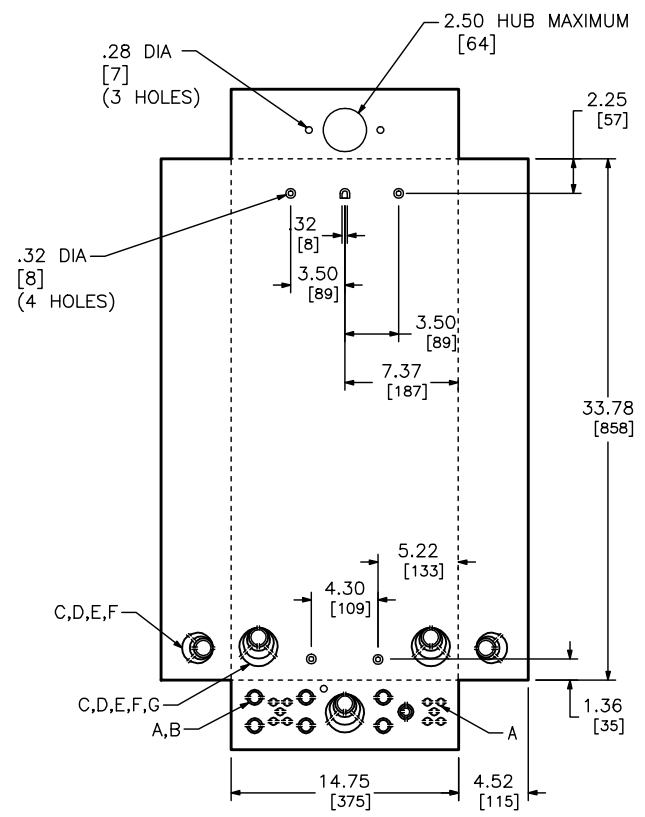

DUAL DIMENSIONS: INCHES  
MILLIMETERS

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG AL/CU
QO140M200RB QO140L200GRB	120/240VAC 1Ø 3W	200	40	40	#4-250
QO14060L200GRB QO14060M200RB		200	40	60	

NOTES:  
FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPATIZED STEEL.  
UL LISTED - FILE E-6294  
NEUTRALS - INSULATED GROUNDABLE.  
WHEN MOUNTING THESE LOAD CENTERS, ALLOW 1.25 / 32 CLEARANCE ON HINGED SIDE FOR THE DOOR TO OPEN

QO LOAD CENTER  
RAINPROOF NEMA TYPE 3R ENCLOSURE  
SIDE HINGED  
OUTDOOR

**SQUARE D**  
**by Schneider Electric**

DWG# 3015  
NO.