Straight Blade Devices



15 and 20 Ampere, 125 Volts



CR15BLKTR

CR15GRYTR

CR15TR

CR15ITR

CRF15AL

CRF15GRY

CRF15

CRF15I

CRF15LA

CRF15OW

CRF15WHI

CR15BLKP1

CR15GRYP1

CR15P1

CR15IP1

CR15LAP1

CR15WHIP1

CR15BLKP2

CR15GRYTRP2

CR15ITRP2

CR15LATRP2

CR15WHITRP2

CR15LATR

CR15WHITR



CR20BLKTR

CR20GRYTR

CR20TR

CR20ITR

CR20LATR

CRF20AL

CRF20

CRF20I

CRF20LA

CRF20OW

CRF20WHI

CR20P1

CR20IP1

CR20P2

CR20IP2 CR20LAP2

CR20LAP1

CR20WHIP1

CR20BLKP2

CR20GRYP2

CR20WHIP2

CR20TRP1

CR20ITRP1

CR20TRP2

CR20ITRP2

CR20LATRP2

CR20WHITRP2

CR20LATRP1

CR20WHITRP1

CR20BLKTRP2

CR20GRYTRP2

CR20BLKTRP1

CR20GRYTRP1

CR20BLKP1

CR20GRYP1

CRF20BLK

CRF20GRY

CR20WHITR




1		
	(E-1)	20
10	11	2 0 701
3.28" (83.3)		2.73" (69.3)
	(Carlo)	Fil-

CR15I

Commercial Specification Grade Receptacles



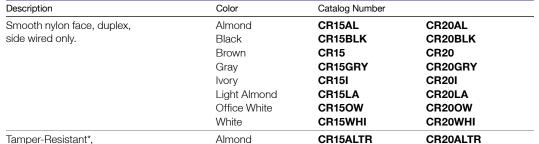

Black

Ivory Light Almond

White

Black

Brown


Gray

Ivory

Black

Office White

Light Almond White



CR15TR

_1.32" (33.6)

CRF15LA


1.32"

wired only.	Brown
	Gray
	lvory
	Light Almond
	White

	Light Almond White
Finder groove, nylon face, duplex,	Almond Black
side wired only.	Brown
	Gray



smooth nylon face, duplex,





\sim	
1/	
/stee	

D	Pre-wired receptacles,	
TR	Tamper-Resistant*, smooth nylon fa	
	duplex, side wired only, self-ground	
	8" solid wire leads.	





CR15IP1

11
MR

Tamper-Resistant*, smooth nylon face, duplex, side wired only, self-grounding, 8" stranded wire leads.

Brown **CR15P2** CR15GRYP2 Gray Ivorv CR15IP2 Light Almond CR15LAP2 White CR15WHIP2 Black CR15BLKTRP1 ace, Brown CR15TRP1 ding, CR15GRYTRP1 Gray CR15ITRP1 Ivory Light Almond CR15LATRP1 White CR15WHITRP1 Black CR15BLKTRP2 Pre-wired receptacles, Brown CR15TRP2

Gray

Ivory Light Almond

White

Note: *Tamper-resistant devices are not Fed. Spec. Listed. See page A-47 for accessories.

See page Tech-10 for Tamper-Resistant descriptions. See section O for wallplates.

Dimensions in Inches (mm)

3.28" (83.3)