



Product Datasheet

ANDERSON FARGO

LC4035 -- Connector, Parallel Groove



Two Center Bolt Bronze Parallel Groove Connector

Product Specifications

Category Image	 Mechanical Connectors (Bronze) Bronze Parallel Groove and Split Bolt Connectors Connector For CU to CU connections
Series Image (BR Mech)	 LC-400 Series Bronze 2 Center Bolt Parallel Groove Connector For CU Connections
Material	Bronze
PDF Catalog Page	Click HERE to view the web page.
Bolt Style	Two Center Bolts - 1/2" diameter
Plating	No
Inhibitor	No
Run Conductor Size and Type	Cu 2 sol, Cu 1 sol, Cu 2 str (7), Cu 1/0 sol, Cu 1 str (7), Cu 1 str (19), Cu 2/0 sol, Cu 1/0 str (7), Cu 1/0 str (19), Cu 3/0 sol, Cu 2/0 str (7), Cu 2/0 str (19), Cu 9 sol w/Armor Rods, Cu 8 sol w/Armor Rods, Cu 8 str (7) w/Armor Rods, Cu 6 sol w/Armor Rods, Cu 6 str (7) w/Armor Rods, Cu 4 sol w/Armor Rods, Cu 4 str (7) w/Armor Rods, Cu 4/0 sol, Cu 3/0 str (7), Cu 3/0 str (19), Cu 4/0 str (7), Cu 4/0 str (19), Cu 2 sol w/Armor Rods, Cu 1 sol w/Armor Rods, Cu 2 str (7) w/Armor Rods, Cu 250 kcmil (19), Cu 250 kcmil (37), Cu 300 kcmil (19), Cu 300 kcmil (37), Cu 1/0 sol w/Armor Rods, Cu 1 str (7) w/Armor Rods, Cu 1 str (19) w/Armor Rods, Cu 2/0 sol w/Armor Rods, Cu 1/0 str (7) w/Armor Rods
	Cu 2 sol, Cu 1 sol, Cu 2 str (7), Cu 1/0 sol, Cu 9 sol w/Armor Rods, Cu 1 str (7), Cu 1 str (19), Cu 2/0 sol, Cu 1/0

Tap Conductor Size and Type	str (7), Cu 1/0 str (19), Cu 8 sol w/Armor Rods, Cu 8 str (7) w/Armor Rods, Cu 6 sol w/Armor Rods, Cu 6 str (7) w/Armor Rods, Cu 3/0 sol, Cu 2/0 str (7), Cu 2/0 str (19), Cu 4 sol w/Armor Rods, Cu 4 str (7) w/Armor Rods, Cu 4/0 sol, Cu 3/0 str (7), Cu 3/0 str (19), Cu 4/0 str (7), Cu 4/0 str (19), Cu 250 kcmil (19), Cu 250 kcmil (37), Cu 300 kcmil (19), Cu 300 kcmil (37), Cu 2 sol w/Armor Rods, Cu 1 sol w/Armor Rods, Cu 2 str (7) w/Armor Rods, Cu 1/0 sol w/Armor Rods, Cu 1 str (7) w/Armor Rods, Cu 1 str (19) w/Armor Rods, Cu 2/0 sol w/Armor Rods, Cu 1/0 str (7) w/Armor Rods
Run Conductor Minimum Size	0.258 in
Run Conductor Maximum Size	.63 in
Tap Conductor Minimum Size	.258 in
Tap Conductor Maximum Size	.63 in
Run Conductor Type	CU
Tap Conductor Type	CU
Style	Two Center Bolts
Cover Available	No
UL Listed	No
Body Material	Bronze Alloy
Body and Keeper Material	Bronze Alloy
Body Members Material	Bronze Alloy
Body Halves Material	Bronze Alloy
Bolt Material	Silicon Bronze
Bottom Member Material	Bronze Alloy
Hardware Material	Silicon Bronze
Dimension H	2.25 in (57 mm)
Dimension J	0.50 in (13 mm)
Dimension L	3.12 in (79 mm)
Dimension W	2.25 in (57 mm)
Bolt Size	0.50 in (13 mm)
Bolt Head	Hex
Bolt Diameter	0.50 in (13 mm)
Material Type	Non-Standard
UPC Code	09635931955
Standard Package	3

Standard Package Unit	Each
Min Order Qty	3
Weight / Ea.	1.372 lbs

Notes


For CU to CU splice/Tap connections

Features

Hardware may also be stainless steel (SS).

Compressed Product Number

LC4035

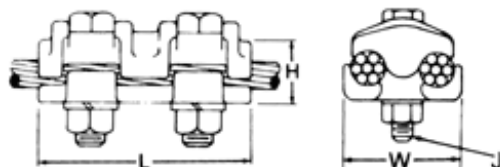

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.