

Product availability : Stock - Normally stocked in distribution facility

Price* : 3814.56 USD



Main

Range of product	Modicon Quantum automation platform
Product or component type	Dc discrete output module
Discrete output number	32

Complementary

Group of channels	4 groups of 8
Discrete output logic	Negative logic (sink)
Addressing requirement	2 output words 2 input words
Discrete output voltage	10...30 V DC
Absolute maximum output	50 V for 1 s decaying pulse
Voltage drop	0.4 V 0.5 A
Maximum load current	<= 0.5 A each point <= 16 A per module <= 4 A each group
Surge current	<= 2.5 A for 1 ms
Response time	<= 2 ms at state 0 to state 1 <= 2 ms at state 1 to state 0 1 ms at state 0 to state 1 1 ms at state 1 to state 0
Short-circuit protection	With
Output overvoltage protection	With
Load inductance	$\text{Inductance(H)} = 0.5 / ((\text{current(A)})^2 \times (\text{switching frequency(Hz)}))$ 0.5...4 Hz
Tungsten load	2.5 W 10 V 3 W 12 V 6 W 24 V
Fault indication	Incorrect output state Blown fuse Loss of field power

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Protection type	Internal output protection by 5 A fuse per group
Power dissipation	2.5 W + (0.1 x all points on) + (0.4 x total load current)
Marking	CE
Local signalling	1 LED green bus communication is present (Active) 1 LED red external fault detected (F) 32 LEDs green input status
Bus current requirement	500 mA 500 mA
Module format	Standard
Product weight	0.66 lb(US) (0.3 kg)

Environment

Product certifications	RMRS FM Class 1 Division 2 GOST C-Tick
Standards	UL 508 CSA C22.2 No 142
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	9.14 V/yd (10 V/m) 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	95 % without condensation
Operating altitude	<= 16404.2 ft (5000 m)

Ordering and shipping details

Category	18155 - QUANTUM I/O & POWER SUPPLIES
Discount Schedule	PC21
GTIN	00785901763772
Nbr. of units in pkg.	1
Package weight(Lbs)	1.02
Returnability	N
Country of origin	CN

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0932 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Contractual warranty

Warranty period	18 months
-----------------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

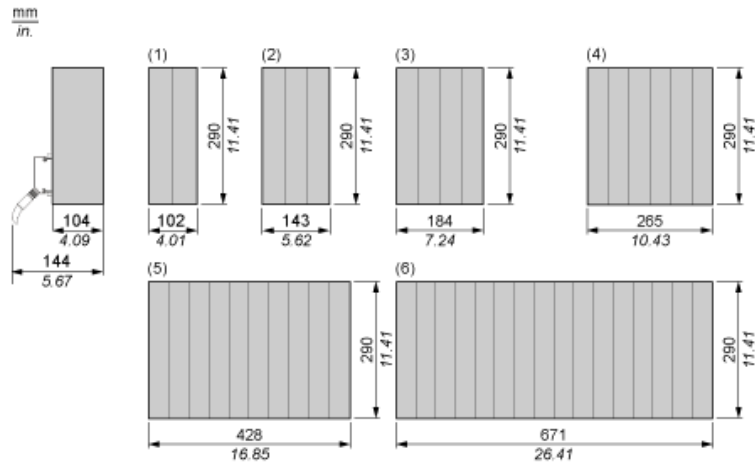

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

10...30 Vdc Verified Output 32-point Module

Wiring Diagram

