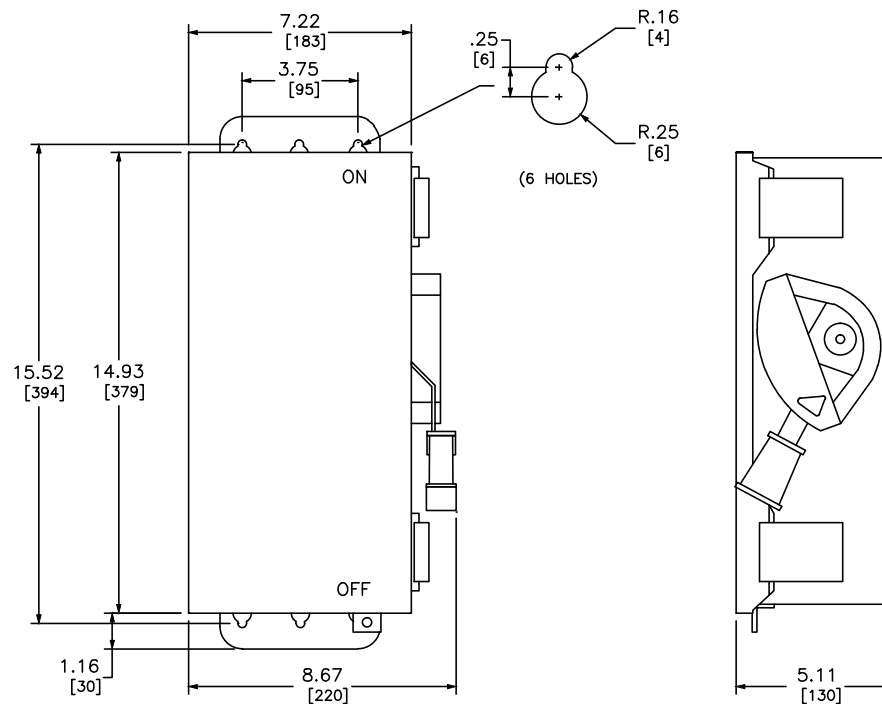


TERMINAL LUG DATA ‡			
AMPERES	MAX WIRE	MIN WIRE	TYPE
30	#6 AWG	#12 AWG	AL
30	#6 AWG	#14 AWG	CU

DUAL DIMENSIONS: INCHES
MILLIMETERS

NOTES:
FINISH - TYPE 316 STAINLESS STEEL
UL LISTED - E2875
CSA - FILE PER REFERENCE 158337 REPORT 1100916 (LL 89067-45)
ALL NEUTRALS - INSULATED
SHORT CIRCUIT CURRENT RATINGS:
10,000 RMS SYMMETRICAL AMPERES
WHEN USED IN CONJUNCTION
WITH CLASS H OR K FUSES
200,000 RMS SYMMETRICAL AMPERES WHEN USED
IN CONJUNCTION WITH CLASS R, J OR T FUSES
*USE BOTH OUTER SWITCHING POLES
♦FOR CORNER GROUNDED DELTA INSTALL NEUTRAL AND USE OUTER SWITCHING
POLES FOR UNGROUNDED CONDUCTORS.
‡LUGS SUITABLE FOR 60°C OR 75°C CONDUCTORS ONLY.

CATALOG NUMBER	VOLTAGE RATINGS	AMPERAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS															250 VDC		600 VDC				
				240VAC						480VAC						600VAC									
				STD			MAX			STD			MAX			STD			MAX						
				1Ø	2Ø	3Ø	1Ø	2Ø	3Ø	1Ø	2Ø	3Ø	1Ø	2Ø	3Ø	1Ø	2Ø	3Ø	1Ø	2Ø	3Ø				
H361SS	600VAC,600VDC	30	A	—	—	—	—	—	—	3*	—	5 ♦	7.5*	—	15 ♦	—	—	7.5	—	—	20	5*	—	10*	15*
HU361SS	600VAC,600VDC	30	B	—	—	—	5*	—	10 ♦	—	—	—	7.5*	—	20 ♦	—	—	—	10*	—	30	—	5*	—	15*

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADES
30 & 60 AMPERE-SERIES F6
ENCLOSURE-NEMA TYPE 4, 4X AND 5 STAINLESS STEEL



DWG# 3331
NO.