


NOTES:

1. DIMENSIONS SUBJECT TO +/- 3% TOLERANCE
2. LEAKAGE DISTANCE (Inches) - 52.0
3. ALTITUDE 0-12000 FT. ABOVE SEA LEVEL
4. WEIGHT OF UNIT INCLUDING HARDWARE - 12.1 LB.
5. MAXIMUM CONTINUOUS LINE-TO-GROUND OPERATING VOLTAGE 24.4 kV MCOV
6. DUTY CYCLE VOLTAGE RATING 30 kV RMS.
7. PVR RISER LABEL ON UNDERSIDE OF INSULATING BASE, OR ARRESTER

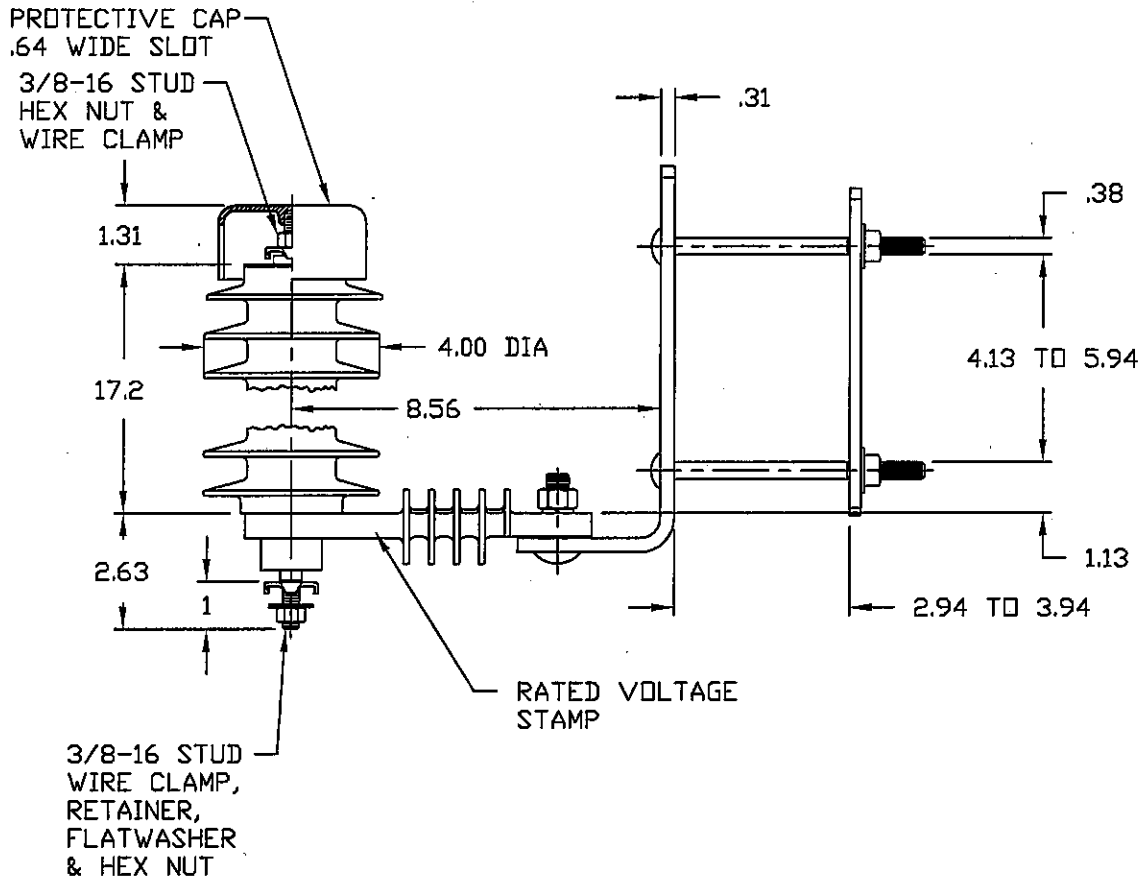

.5 μ SEC 10kA IR kV	500 A SWITCHING SURGE IR kV	MAXIMUM 8/20 DISCHARGE VOLTAGE - kV AT					
		1.5 kA	3.0 kA	5 kA	10 kA	20 kA	40 kA
88.5	58.7	64.5	69.4	73.3	81.0	92.9	110.0

RISER POLE SURGE ARRESTER	CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	HUBBELL® POWER SYSTEMS			
		TITLE PVR ARRESTER 24.4 KV MCOV			
		SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
		S	ALES7XXX	221624-7324	7
REV DATE	10/24/07	DO NOT SCALE THIS DRAWING	DRN BY ENG106	DATE 06/17/00	SHEET 1 OF 1