




Product Datasheet

ANDERSON FARGO

ORT2116 -- Compression Tee Tap

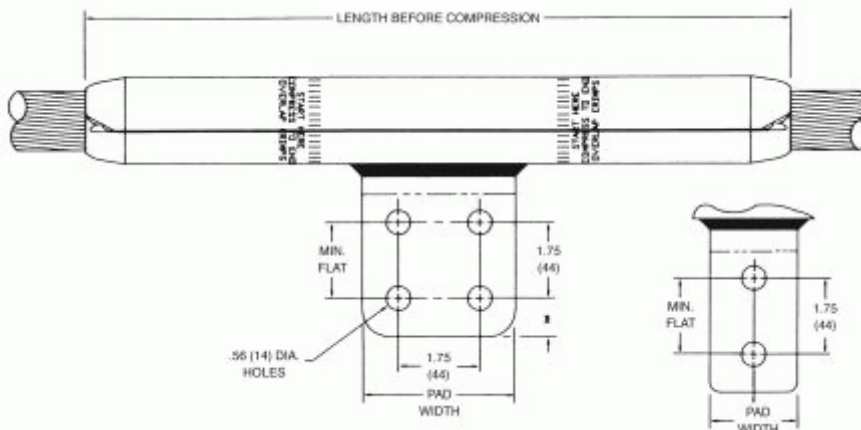

Compression Tee Tap, Cable-to-Pad, Open Run,
Run Cond. Range: 1.426-1.520, 4-Hole Pad

Product Specifications


Series	
PDF Catalog Page	Click HERE to view the web page.
Main Conductor Range (in)	1.426-1.520
Run Length before Compression	21.6 in (549 mm)
Pad Width	3.0 in (76 mm)
Pad Holes	4
Compression Method	Single Die
Material & Connection Method	Aluminum Compression
Die Size	16CD
Minimum Press (Tons)	60
Voltage Application	EHV & Std
Inhibitor Loaded	No
Run Conductor Minimum - Maximum Range	AAC 1590 kcmil (61) thru AAC 1590 kcmil (91) ACSR 1431.0 kcmil (45/7) thru ACSR 1590 kcmil (45/7)
Material Type	Non-Standard
UPC Code	09635936454
Standard Package	9
Standard Package Unit	Each
MOQ	1
Weight / Ea.	6.86 lbs

Features

Tapers and pad are coated with protective strippable plastic. Pad holes have NEMA spacing.

Compressed Product Number

ORT2116

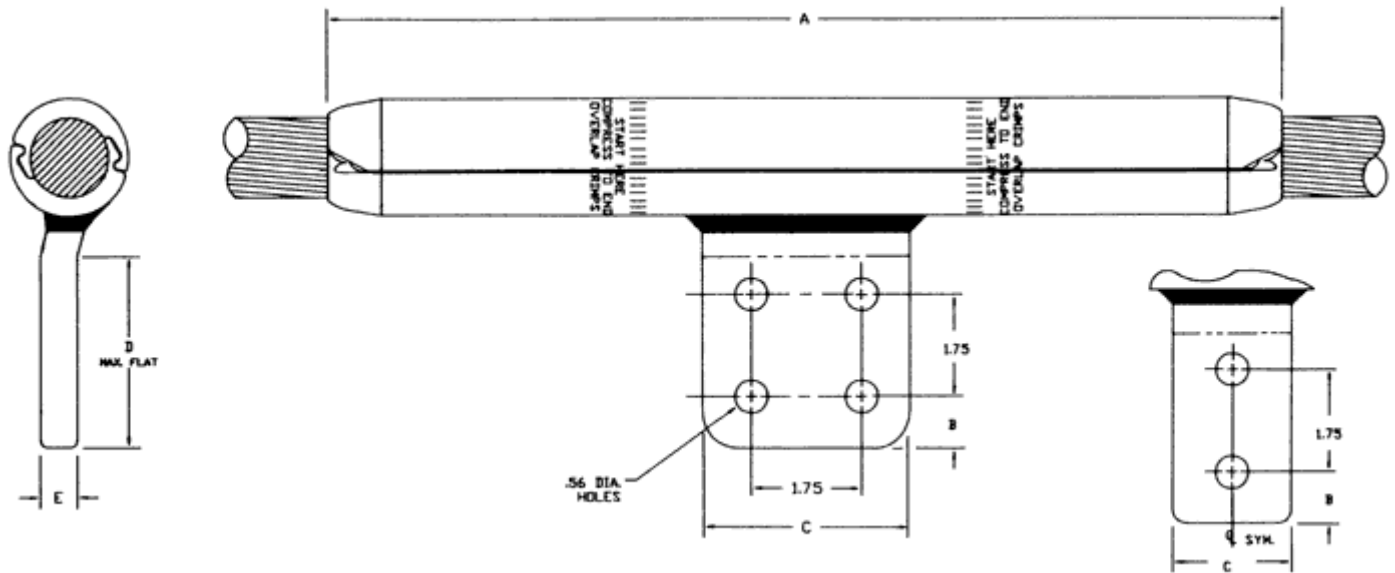

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.