



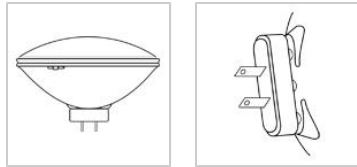

GE  
Lighting

### 49889 - 200PAR56/MFL

GE Soft White PAR56 - Medium Flood

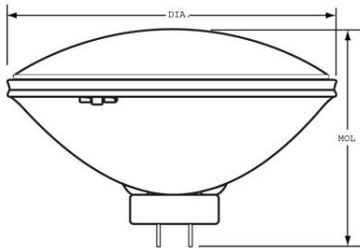

#### CAUTIONS & WARNINGS

##### Warning

- Risk of Fire
  - Keep combustible materials away from lamp.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Use in enclosed fixture rated for this product.
  - Avoid direct water/liquid contact.

#### NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

#### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Mogul End Prong (GX16d)
Filament	CC-13
Rated Life (NOM)	2000.0 h
Primary Application	Medium Flood

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2270.0
Beam Spread - Horizontal	34.0 - 10.0 °/22.0 - 50.0 °
Beam Spread - Vertical	22.0 - 10.0 °/13.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	15000.0
Color Temperature (NOM)	2750.0 K
Nominal Initial Lumens per Watt (NOM)	11.35

#### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	200.0
Voltage (NOM)	120.0

#### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.000 in(127.0 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)

#### PRODUCT INFORMATION

Product Code	49889
Description	200PAR56/MFL
Standard Package	Case
Standard Package GTIN	10043168498897
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168498890