




GE
Lighting

13789 - F96T12CW1500WM15

GE Cool White Watt-Miser® T12

- Saves energy compared to standard wattage lamps

Energy Savings
⚡
Reduced Wattage

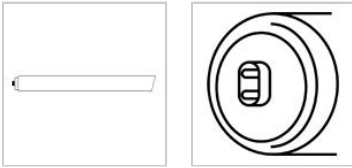

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

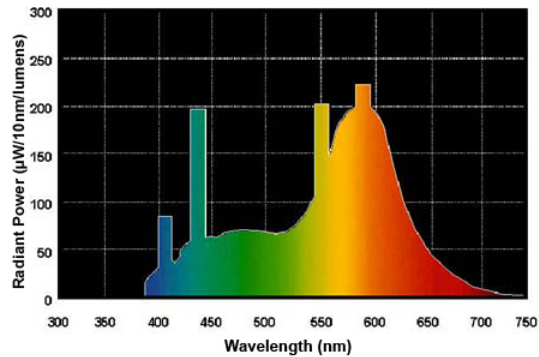

Graphs_Lamp Mortality

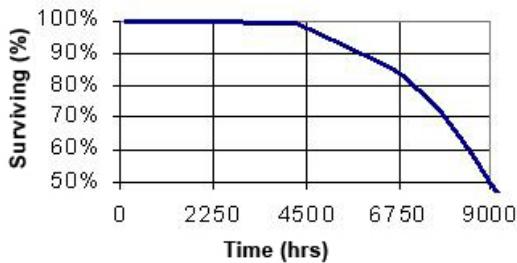

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T12
Base	Recessed Double Contact (R17d)
Rated Life	9000.0 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	-29.0 °C
LEED-EB MR Credit	1066 picograms Hg per mean lumen hour
Primary Application	Speciality

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	12500.0
Mean Lumens	9380.0
Nominal Initial Lumens per Watt	67
Color Temperature	4100.0 K
Color Rendering Index (CRI)	60.0

ELECTRICAL CHARACTERISTICS

Wattage	185.0
Voltage	130.0
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	96.0000 in(2438.4 mm)
Minimum Overall Length	93.7200 in(2380.5 mm)
Nominal Length	96.000 in(2438.4 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)
End of Base Pin to End of Opposite Pin End (C)	93.720 in(2380.5 mm)

PRODUCT INFORMATION

Product Code	13789
Description	F96T12CW1500WM15
Standard Package	Case
Standard Package GTIN	10043168137895
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168137898