





GE
Lighting

20836 - 300PAR56/MFL

GE PAR56 - Medium Flood

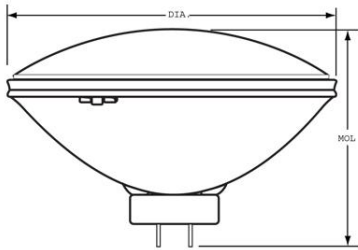

CAUTIONS & WARNINGS

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Use in enclosed fixture rated for this product.
 - Avoid direct water/liquid contact.

NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Mogul End Prong (GX16d)
Filament	CC-13
Rated Life	2000.0 hrs
Primary Application	Medium Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	3840.0
Beam Spread - Horizontal	34.0 - 10.0 °/23.0 - 50.0 °
Beam Spread - Vertical	19.0 - 10.0 °/11.0 - 50.0 °
Center Beam Candlepower (CBCP)	24000.0
Color Temperature	2750.0 K
Nominal Initial Lumens per Watt	12

ELECTRICAL CHARACTERISTICS

Wattage	300.0
Voltage	120.0

DIMENSIONS

Maximum Overall Length (MOL)	5.0000 in(127.0 mm)
Bulb Diameter (DIA)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	20836
Description	300PAR56/MFL
Standard Package	Case
Standard Package GTIN	10043168208366
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168208369