



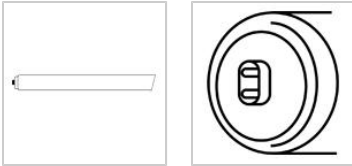

GE
Lighting

23087 - F64T12/D/HO 15PK

GE Daylight T12



CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

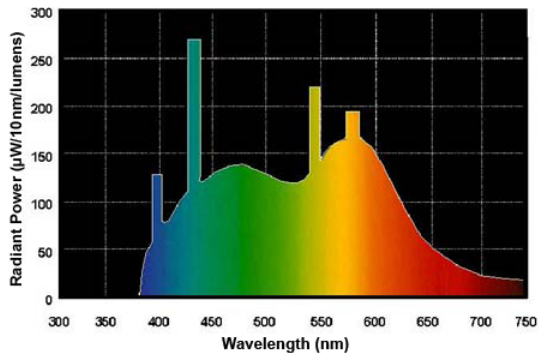

Graphs_Lamp Mortality

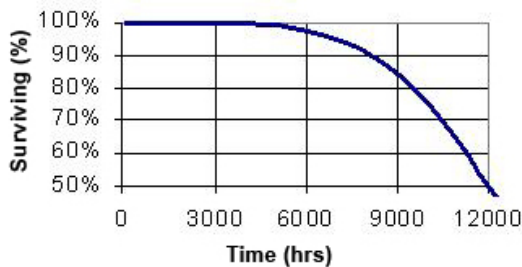

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T12
	Recessed Double Contact (R17d)
Rated Life	12000.0 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	-29.0 °C
LEED-EB MR Credit	1816 picograms Hg per mean lumen hour
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	4750.0
Mean Lumens	4130.0
Nominal Initial Lumens per Watt	59
Color Temperature	6500.0 K
Color Rendering Index (CRI)	75.0

ELECTRICAL CHARACTERISTICS

Wattage	80.0
Voltage	100.0
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL)	64.0000 in(1625.6 mm)
Minimum Overall Length	61.7200 in(1567.7 mm)
Nominal Length	64.000 in(1625.6 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.590 in(40.4 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)

PRODUCT INFORMATION

Product Code	23087
Description	F64T12/D/HO 15PK
Standard Package	Case
Standard Package GTIN	10043168230879
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168230872