



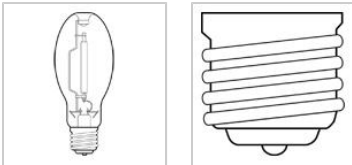

GE
Lighting

44975 - LU50/H/ECO

GE Lucalox® High Pressure Sodium ED23.5

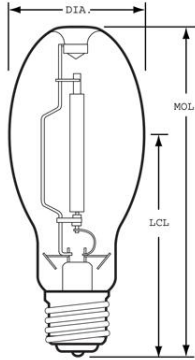

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Contains sodium – chemical burn risk
 - Avoid skin contact with broken pieces.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not store flammable materials near/below lamp.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Use only properly rated ballast.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium ED23.5
Bulb	ED23.5
Base	Mogul Screw (E39)
Bulb Finish	Clear
Rated Life (MIN)	24000.0 h
Rated Life	24000.0 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
LEED-EB MR Credit	159 picograms Hg per mean lumen hour
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	4000.0
Mean Lumens	3600.0
Nominal Initial Lumens per Watt	80
Color Temperature	1900.0 K
Color Rendering Index (CRI)	22.0
Effective Arc Length	0.8 in

ELECTRICAL CHARACTERISTICS


Wattage	50.0
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	110.0 V
Warm Up Time to 90% (MIN)	3.0 min
Warm Up Time to 90% (MAX)	4.0 min
Hot Restart Time to 90% (MAX)	40.0 s

DIMENSIONS

Maximum Overall Length (MOL)	7.7500 in(196.8 mm)
Nominal Length	7.750 in(196.8 mm)
Bulb Diameter (DIA)	2.937 in(74.6 mm)
Light Center Length (LCL)	5.000 in(127.0 mm)

PRODUCT INFORMATION

Product Code	44975
Description	LU50/H/ECO
ANSI Code	S68
Standard Package	Case
Standard Package GTIN	10043168449752
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168449755

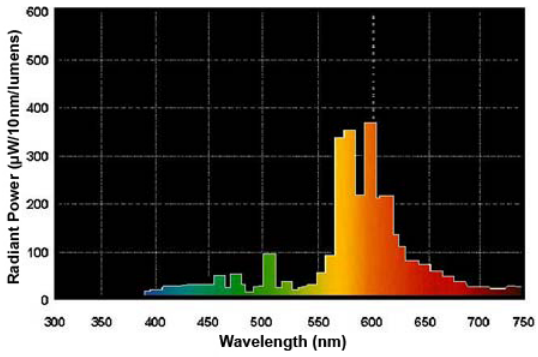

Graphs_Lumen Maintenance

