

# VuLite<sup>®</sup> Economy Recessed Lighting

A new view on economy lighting



**JUNO**<sup>®</sup>

# Juno® VuLite® Economy Recessed Lighting

## Viewing economy recessed downlighting in a different light

Take a new "view" on economy lighting with Juno VuLite. VuLite is an economic alternative for recessed lighting offering a selection of 4", 5" and 6" downlights for use in residential and light commercial applications. The line includes a range of popular trim selections including baffles, cones, adjustables and lensed, providing choices to meet the needs of

various lighting applications. Economy does not mean sacrificing the quality and standards you have come to expect from the Juno brand. You can buy and install VuLite products with total confidence knowing that all products are designed and tested to meet UL requirements and are backed by the leader in residential recessed lighting.

### VuLite Product Offering

#### 4" Housings and Trims

##### Line Voltage Housings



V4IC W



V4TC W



V4TCR W

##### Low Voltage Housings



V4ICLV W



V4TCLV W



V4TCRLV W

##### 4-inch Trims



Baffle



Clear Cone



Gimbal Ring



Eyeball



Flat Lens Shower

## 5" Housings and Trims

### Line Voltage Housings



V51C W



V51CR W



V5TC W



V5TCR W

### 5-inch Trims



Baffle



Clear Cone



White Cone



R/PAR20 Eyeball



PAR30 Eyeball



Flat Lens

## 6" Housings and Trims

### Line Voltage Housings



V61C W and V61CN W



V61CR W



V6TC W



V6TCR W

### 6-inch Trims



Baffle



Full Baffle



Clear Cone



Full Cone



Eyeball



Flat Lens Shower



Drop Opal




Open Frame

# VuLite® 4" Line Voltage Housings and Trims

## IC Housings

### V4IC W

4" IC New Construction  
Energy efficient double wall housing. May be covered with insulation.



Dimensions:  
12"L x 13-3/8"W x 6"H  
Ceiling Cutout: 4-1/2" Diameter


#### Accessories:

**G2405** Set of (4) T-bar clips for installation in suspended ceilings.

## TC Housings

### V4TC W


4" TC New Construction  
Requires 3" spacing from insulation.



Dimensions:  
12-1/8"L x 13-3/8"W x 5-1/2"H  
Ceiling Cutout: 4-1/2" Diameter

### V4TCR W

4" TC Remodel  
Requires 3" spacing from insulation.



Dimensions:  
12"L x 4-1/4"W x 5-1/2"H  
Ceiling Cutout: 4-3/8" Diameter

## 4" Compatible Trims - Line Voltage

### Baffle

**V4034 WWH** White  
**V4034 BWH** Black



Aperture: 3-7/8"  
Outer Diameter: 5"

#### Juno Compatible Housings: Lamp Wattage/Type

**V4IC W**: 50W PAR20, 30W R20  
**V4TC W, V4TCR W**: 50W PAR20, 50W R20  
**IC1P, TC1, TC1R**: 50W PAR20, 50W R20  
**IC1**: 50W PAR20, 30W R20

### Eyeball

**V4018 WH** White




Outer Diameter: 5"

#### Juno Compatible Housings: Lamp Wattage/Type

**V4IC W, V4TC W, V4TCR W**: 60W PAR16, 40W R16  
**IC1, IC1P, TC1, TC1R**: 60W PAR16, 40W R16

### Cone

**V4017 CWH** Clear



Aperture: 3-7/8"  
Outer Diameter: 5"

#### Juno Compatible Housings: Lamp Wattage/Type

**V4IC W, V4TC W, V4TCR W**: 50W PAR20, 50W R20  
**IC1, IC1P, TC1, TC1R**: 50W PAR20, 50W R20

### Stippled Opal Lens Shower with Reflector

**V4012 WH** White



Outer Diameter: 5"


#### Juno Compatible Housings: Lamp Wattage/Type

(Remove reflector when using Juno IC1 housing)

**V4IC W**: 35W PAR20, 30W R20  
**V4TC W, V4TCR W**: 50W PAR20, 50W R20  
**IC1**: 35W PAR20, 30W R20  
**IC1P**: 50W PAR20, 30W R20  
**TC1, TC1R**: 50W PAR20, 50W R20

### Gimbal Ring

**V4010 WH** White  
**V4010 BN** Brushed Nickel



Outer Diameter: 5"

#### Juno Compatible Housings: Lamp Wattage/Type

**V4IC W, V4TC W, V4TCR W**: 50W PAR20  
**IC1P, TC1, TC1R**: 50W PAR20

### Gimbal Ring

**V4040 WH** White  
**V4040 BN** Brushed Nickel



Outer Diameter: 5"

#### Juno Compatible Housings: Lamp Wattage/Type


**V4IC W**: 35W MR16, 35 PAR16 120V Medium Base  
**IC1, IC1P**: 35W MR16, 35W PAR16 120V Medium Base

# VuLite® 4" Low Voltage Housings and Trims

## IC Housings

### V4ICLV W

4" IC Low Voltage New Construction  
50W Energy efficient double wall housing includes 50VA, 12V thermally protected magnetic transformer. May be covered with insulation.

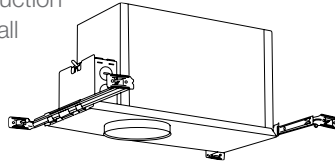

Dimensions:  
18-1/2"L x 13-3/8"W x 7-5/8"H  
Ceiling Cutout: 4-1/2" Diameter


#### Accessories:

**G2405** Set of (4) T-bar clips for installation in suspended ceilings.

## TC Housings

### V4TCLV W


4" TC Low Voltage New Construction  
50W Housing includes 50VA, 12V thermally protected magnetic transformer. Requires 3" spacing from insulation.

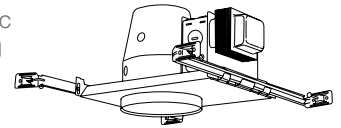

Dimensions:  
12-1/8"L x 13-3/8"W x 5-1/2"H  
Ceiling Cutout: 4-1/2" Diameter

### V4TCRLV W

4" TC Low Voltage Remodel 50W  
Housing includes 50VA, 12V magnetic transformer. Requires 3" spacing from insulation.




Dimensions:  
14-1/2"L x 4-1/4"W x 5-1/2"H  
Ceiling Cutout: 4-3/8" Diameter

## 4" Compatible Trims – Low Voltage

### Baffle with Regressed Gimbal Ring

**V4044 WWH** White  
**V4044 BWH** Black



Aperture: 3-1/2"  
Outer Diameter: 5"

**Juno Compatible Housings: Lamp Wattage/Type**  
V4ICLV W, V4TCLV W, V4TCRLV W: 50W MR16  
IC44N, TC44, TC44 V, TC44R, TC47, TC47 V: 50W MR16

### Eyeball with Baffle

**V4048 WH** White



Outer Diameter: 5"

**Juno Compatible Housings: Lamp Wattage/Type**  
V4ICLV W, V4TCLV W, V4TCRLV W: 50W MR16  
IC44N, TC44, TC44 V, TC44R, TC47, TC47 V: 50W MR16

### Cone with Regressed Gimbal Ring

**V4047 CWH** Clear



Aperture: 3-1/2"  
Outer Diameter: 5"

**Juno Compatible Housings: Lamp Wattage/Type**  
V4ICLV W, V4TCLV W, V4TCRLV W: 50W MR16  
IC44N, TC44, TC44 V, TC44R, TC47, TC47 V: 50W MR16

### Stippled Opal Lens Shower

**V4041 WH** White



Outer Diameter: 5"

**Juno Compatible Housings: Lamp Wattage/Type**  
V4ICLV W, V4TCLV W, V4TCRLV W: 50W MR16  
IC44N, TC44, TC44 V, TC44R, TC47, TC47 V: 50W MR16



### Gimbal Ring

**V4040 WH** White  
**V4040 BN** Brushed Nickel



Outer Diameter: 5"

**Juno Compatible Housings: Lamp Wattage/Type**  
V4ICLV W, V4TCLV W, V4TCRLV W: 50W MR16  
IC44N, TC44, TC44 V, TC44R, TC47, TC47 V: 50W MR16


# VuLite® 5" Line Voltage Housings and Trims

## IC Housings

### V5IC W

5" IC New Construction  
Energy efficient housing.  
May be covered with insulation.


Dimensions:  
11-7/8"L x 13-3/8"W x 7-1/2"H  
Ceiling Cutout: 5-5/8" Diameter



### V5ICR W

5" IC Remodel  
Energy efficient housing.  
May be covered with insulation.

Dimensions:  
14-3/8"L x 6-3/4"W x 7-1/2"H  
Ceiling Cutout: 5-1/2" Diameter




## TC Housings

### V5TC W

5" TC New Construction  
Requires 3" spacing from insulation.


Dimensions:  
11-7/8"L x 13-3/8"W x 7-1/2"H  
Ceiling Cutout: 5-5/8" Diameter



### V5TCR W

5" TC Remodel  
Requires 3" spacing from insulation.

Dimensions:  
12-1/2"L x 5-7/8"W x 7-1/2"H  
Ceiling Cutout: 5-1/2" Diameter



### Accessories:


**ALG5** Airloc® gasket kit for V5IC W housing when an Airloc® trim is not being used. **G2405** Set of (4) T-bar clips for installation in suspended ceilings.

## 5" Compatible Trims

### Baffle

**V2015 WWH** White  
**V2015 BWH** Black

Aperture: 4-3/4"  
Outer Diameter: 6-1/4"



### Juno Compatible Housings: Lamp Wattage/Type

**V5IC W, V5ICR W:** 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender, 50W PAR30 (black only)

**V5TC W, V5TCR W:** 85W BR30, 75W PAR30L, 40W A19 (white only), 75W PAR30 (black only or use socket extender with white)

**IC20, IC20R:** 40W A19, 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender

**IC20N:** 65W BR30

**TC20, TC20R:** 60W A19, 85W BR30, 75W PAR30L, 75W PAR30 w/socket extender

### Cone

**V2016 CWH** Clear  
**V2016 WWH** White

Aperture: 4-3/4"  
Outer Diameter: 6-1/4"



### Juno Compatible Housings: Lamp Wattage/Type

**V5IC W, V5ICR W:** 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender

**V5TC W, V5TCR W:** 85W BR30, 75W PAR30L, 75W PAR30 w/socket extender, 60W A19 (clear only), 40W A19 (white only)

**IC20, IC20R:** 40W A19, 65W BR30, 75W PAR30L, 75W PAR30 w/socket extender

**IC20N:** 65W BR30

**TC20, TC20R:** 60W A19, 85W BR30, 75W PAR30L, 75W PAR30 w/socket extender

### R/PAR20 Eyeball


**V2029 WH** White

### PAR30 Eyeball

**V2030 WH** White

Outer Diameter (R/Par20 Eyeball): 6-1/4"

Outer Diameter (PAR30 Eyeball): 6-1/2"

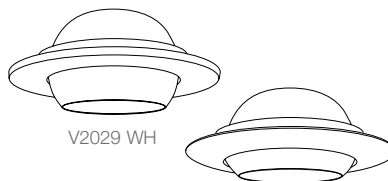

### Juno Compatible Housings: Lamp Wattage/Type

**V2029 WH - V5IC W, V5ICR W:** 50W R20, 50W PAR20

**V5TC W, V5TCR W:** 50W R20, 50W PAR20

**IC20, IC20N, IC20R, TC20, TC20R:** 50W PAR20, 50W R20

**V2030 WH - V5IC W, V5ICR W:** 75W PAR30


**V5TC W, V5TCR W:** 75W PAR30

**IC20, IC20N, IC20R, TC20, TC20R:** 75W PAR30

### Flat Lens Shower with Reflector

**V2010 WH** White

Outer Diameter: 6-1/2"



### Juno Compatible Housings: Lamp Wattage/Type

**V5IC W, V5ICR W:** 35W PAR30L

**V5TC W, V5TCR W:** 75W PAR30L, 90W A19

**IC20, IC20R:** 35W PAR30L & 40W A19

**IC20N:** 35W PAR30L

**TC20, TC20R:** 75W PAR30L & 90W A19


# VuLite® 6" Line Voltage Housings and Trims

## IC Housings

**V6IC W** 6" IC New Construction  
**V6ICN W** 6" IC New Construction with Floating Socket

Energy efficient housing.  
 May be covered with insulation.


Dimensions:  
 13-3/4"L x 13-3/8"W x 7-3/8"H  
 Ceiling Cutout: 6-1/2" Diameter



## TC Housings


**V6TC W**  
 6" TC New Construction  
 Requires 3" spacing from insulation.

Dimensions:  
 13-3/4"L x 13-3/8"W x 7-3/8"H  
 Ceiling Cutout: 6-1/2" Diameter




**V6ICR W**  
 6" IC Remodel  
 Energy efficient housing.  
 May be covered with insulation.

Dimensions:  
 13-3/4"L x 6-3/4"W x 7-3/8"H  
 Ceiling Cutout: 6-1/4" Diameter



**V6TCR W**  
 6" TC Remodel  
 Requires 3" spacing from insulation.

Dimensions:  
 13-3/4"L x 6-3/4"W x 7-3/8"H  
 Ceiling Cutout: 6-1/4" Diameter



**Accessories:** **VALG6** Airloc® gasket kit for V6IC W housing when an Airloc® trim is not being used. **G2405** Set of(4) T-bar clips for installation in suspended ceilings.

## 6" Compatible Trims

### Conical Baffle

**V3024 WWH** White  
**V3024 BWH** Black

Aperture: 5-3/4"  
 Outer Diameter: 7-3/4"




**Juno Compatible Housings: Lamp Wattage/Type**  
**V6IC W, V6ICR W:** 50W PAR30, 75W PAR30L, 65W BR30  
**V6TC W, V6TCR W:** 75W PAR30/PAR30L, 65W BR30, 120W BR40  
**IC22, IC22R:** 50W PAR30, 75W PAR30L, 65W BR30  
**IC2, TC2, TC2R:** 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30

### Straight Baffle

**V3025 WWH** White  
**V3025 BWH** Black

Aperture: 5-3/4"  
 Outer Diameter: 7-3/4"




**Juno Compatible Housings: Lamp Wattage/Type**  
**V6IC W, V6ICR W:** 50W PAR30/PAR30L, 75W PAR38  
**V6TC W, V6TCR W:** 75W PAR30/PAR30L, 65W BR30, 120W BR40, 120W PAR38  
**IC22, IC22R:** 75W PAR30/PAR30L, 65W BR30, 75W PAR38  
**IC2:** 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30, 90W PAR38, 100W BR40  
**TC2, TC2R:** 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30, 150W PAR38, 120W BR40

### Full Baffle

**V3034 WWH** White  
**V3034 BWH** Black  
**V3034T WWH** White w/Torsion Springs  
**V3034T BWH** Black w/Torsion Springs

Aperture: 5-3/4"  
 Outer Diameter: 7-5/8"



**Juno Compatible Housings: Lamp Wattage/Type**  
**V6IC W, V6ICN W, V6ICR W:** 40W A19\*, 75W PAR30/PAR30L, 65W BR30, 90W BR40, 90W PAR38\*  
**V6TC W, V6TCR W:** 60W A19\*, 75W PAR30/PAR30L, 85W BR30, 120W BR40, 150W PAR38\*  
**IC22, IC22R, IC23:** 40W A19, 75W PAR30/PAR30L, 65W BR30, 90W BR40, 90W PAR38  
**IC2:** 60W A19, 75W PAR30/PAR30L, 85W BR30, 100W PAR38, 120W BR40  
**TC2, TC2R:** 60W A19, 75W PAR30/PAR30L, 85W BR30, 150W PAR38, 120W BR40  
**ICPL6 Series:** 32W max. CFL†  
**PL6 Series:** 42W max CFL†

\* No A19 listing and 75W PAR38 max. for the V3034B Series  
 † Note: For best performance, 26W is recommended.

Patent Pending

### Clear Cone

**V3027C WH: Clear**

Aperture: 5-3/4"  
 Outer Diameter: 7-3/4"



**Juno Compatible Housings: Lamp Wattage/Type**  
**V6IC W, V6ICR W:** 50W PAR30, 75W PAR30L, 65W BR30  
**V6TC W, V6TCR W:** 75W PAR30/PAR30L, 65W BR30, 90W BR40  
**IC2, IC22, IC22R:** 50W PAR30, 75W PAR30L, 65W BR30  
**TC2, TC2R:** 75W PAR30/PAR30L, 65W BR30

# VuLite® 6" Line Voltage Housings and Trims

## 6" Compatible Trims

### Full Cone

**V3037 WWH** White  
**V3037T WWH** White w/Torsion Springs

Aperture: 5-3/4"  
 Outer Diameter: 7-5/8"



### Juno Compatible Housings: Lamp Wattage/Type

**V6IC W, V6ICN W, V6ICR W:** 40W A19, 75W PAR30/PAR30L, 65W BR30, 75W BR40, 90W PAR38  
**V6TC W, V6TCR W:** 60W A19, 75W PAR30/PAR30L, 85W BR30, 120W BR40, 150W PAR38

**IC22, IC22R, IC23:** 40W A19, 75W PAR30/PAR30L, 65W BR30, 90W BR40, 90W PAR38

**IC2:** 60W A19, 75W PAR30/PAR30L, 85W BR30, 100W PAR38

**TC2, TC2R:** 60W A19, 75W PAR30/PAR30L, 85W BR30, 120W BR40, 150W PAR38

**ICPL6 Series:** 32W max. CFL†

**PL6 Series:** 42W max CFL†


†Note: For best performance, 26W is recommended.

Patent Pending

### Eyeball

**V3029 WH** White

Outer Diameter: 7-3/4"



### Juno Compatible Housings: Lamp Wattage/Type

**V6IC W, V6ICN W, V6ICR W:** 65W BR30, 75W PAR30L  
**V6TC W, V6TCR W:** 75W PAR30/PAR30L, 65W BR30

**IC22, IC22R, IC23, IC2, TC2, TC2R:** 75W PAR30 w/socket extender, 75W PAR30L, 65W BR30

### Stippled Opal Lens Shower

**V3020 PW** Plastic White

Outer Diameter: 8"



### Juno Compatible Housings: Lamp Wattage/Type


**V6TC W, V6TCR W:** 40W A19, 75W PAR30/PAR30L, 65W BR30, 75W PAR38 (Not for use with V6IC/V6ICR)

**TC2, TC2R:** 60W A19, 75W PAR30/PAR30L, 65W BR30, 75W PAR38

### Stippled Opal Lens Shower with Reflector

**V3040N PW** Plastic White

Outer Diameter: 8"



### Juno Compatible Housings: Lamp Wattage/Type

**V6IC W, V6ICN W, V6ICR W:** 34W A19, 35W PAR30  
**V6TC W, V6TCR W:** 75W A19

**IC2, IC22, IC22R, IC23:** 40W A19


**TC2, TC2R:** 75W A19

**ICPL6/PL6 Series:** 13W max. CFL

### Drop Opal Lens Shower with Reflector

**V3041 PW** Plastic White

Outer Diameter: 8"



### Juno Compatible Housings: Lamp Wattage/Type

**V6IC W, V6ICN W, V6ICR W:** 40W A19  
**V6TC W, V6TCR W:** 100W A19

**IC22, IC22R, IC23:** 40W A19

**IC2:** 60W A19

**TC2, TC2R:** 100W A19


**ICPL6/PL6 Series:** 26W max. CFL

### Open Frame

**V3050 WH** White

Aperture: 3-7/8"

Outer Diameter: 8"



### Juno Compatible Housings: Lamp Wattage/Type

**V6IC W, V6ICR W, V6TC W, V6TCR W:** 65W BR30



All trademarks referenced are property of their respective owners. Specifications subject to change without notice. Printed in the U.S.A.