



# Switch & outlet boxes – technical data

## Outlet boxes and covers

Eaton's has assembled one of the most complete outlet box product lines in the business. We've been leading in quality and selection for decades and throughout the Crouse-Hinds series steel outlet box offering, you will find innovative products and solutions that save labor, cut material costs and increase productivity.

We have a complete offering of:

- 4" and 4<sup>1</sup>/<sub>16</sub>" square drawn and welded boxes with raised cover plate screws for ease of attaching covers
- 4" square and 4<sup>1</sup>/<sub>16</sub>" , switch, masonry, utility, outlet, ceiling, fan and gangable boxes
- Drawn boxes available with concentric knockouts, combining 1/2" and 3/4" knockout
- Complete line of covers, partitions, extension rings and accessories
- Uni-Mount™ covers
- Quick-Lok™ outlet boxes and assemblies
- PRE-formance™ products
- Pre-assembled boxes which includes Uni-Mount cover attached to 4" square box
- Pre-fabricated boxes which includes Uni-Mount cover attached to 4" square box with ground screw and lead installed
- Fire alarm boxes and covers
- **Boxes available with various means of grounding including**
  - **Tapped ground holes**
  - **Pre-installed ground screw, add "G" suffix to box catalog number**
  - **Pre-installed ground pigtail, add "PF" suffix to box catalog number**

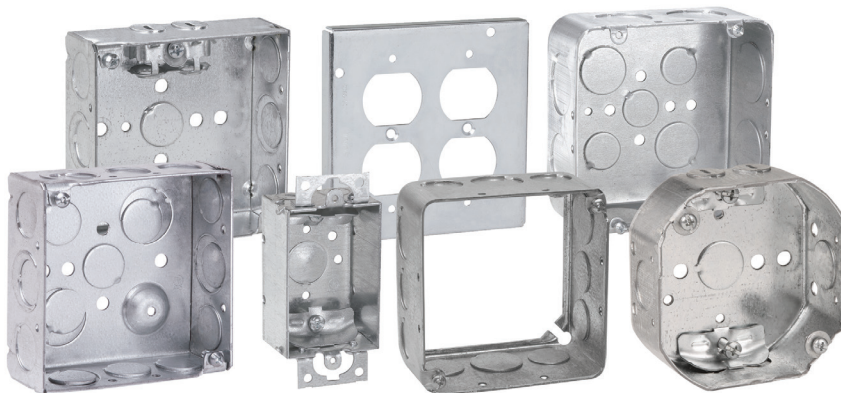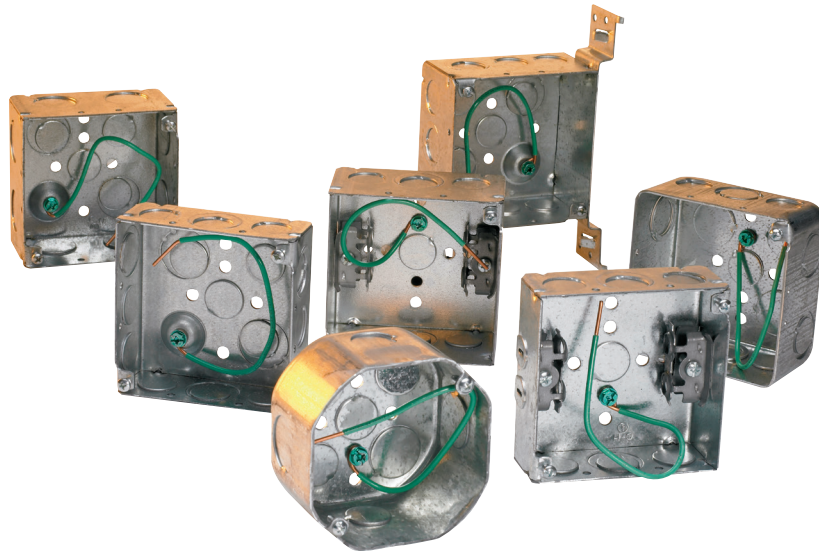

# Switch & outlet boxes – technical data

## General information

### Compliances:


Article 314 of the National Electrical Code® (NEC®) covers the installation and use of boxes. The article includes table references that guide the electrician in the selection of the proper size box necessary to safely accommodate electrical service requirements. The box capacity table is reproduced in part from NEC as a quick reference and guide. The NEC should be consulted for complete details.

### Outlet boxes for fixture or fan support:

A box, with or without a bracket or bar hanger, intended for support of a fixture/luminaire weighing 50 lbs. or less is marked "FOR FIXTURE/LUMINAIRE SUPPORT" on the carton to indicate that the box is intended for fixture/luminaire support. A box, with or without a bracket or bar hanger, intended for support of a fixture/luminaire weighing more than 50 lbs. is marked with the weight of the fixture/luminaire to be supported. Metallic device boxes and device plaster rings have not been investigated for support of a ceiling fixture/luminaire unless marked for use in ceilings, walls and with the weight of the product to be supported. Metallic device boxes intended to be installed in an existing structure have been investigated for the support of utilization equipment weighing not more than 6 lbs.

### Knockouts:

Under File No. E-23156, Eaton's Crouse-Hinds Series concentric and "moon" KO style boxes, the following is stated "Suitable for bonding without any additional bonding means around concentric (or eccentric) knockouts where used in circuits above or below 250V."



### Fire resistance rating wall penetrations:

Eaton's Crouse-Hinds series products are produced in accordance with the requirements of UL514A, UL514B and UL514C, and are classified for fire resistance according to the standard, Fire Tests of Building Construction and Materials, ANSI/UL263, ASTM E 119 and NFPA 251. This listing is based on products when used in a fire rated (2 HR) wall or ceiling. Eaton's Crouse-Hinds series steel boxes are listed with UL File No. E-23156 and non-metallic boxes are listed with UL File No. E-102328 and UL (2 HR fire rated) File No. R9933.

### NEMA standards:

Eaton's Crouse-Hinds series switch and outlet boxes comply with the requirements of NEMA Standard OS-1 and Federal Spec. W-J-800F.

### Grounding hole:

The majority of Crouse-Hinds outlet boxes have at least one tapped #10-32 grounding hole.


### Combination screw heads:

Cover and clamp screws have combination slotted/Phillips screw heads. Self-tapping screws provide for 100% thread engagement.



### Third party certification information:

Third party certification documents can be found on the product detail page of the Eaton website. Just click on the resource tab and click on the link to view the third party document. Document can then be saved or printed.

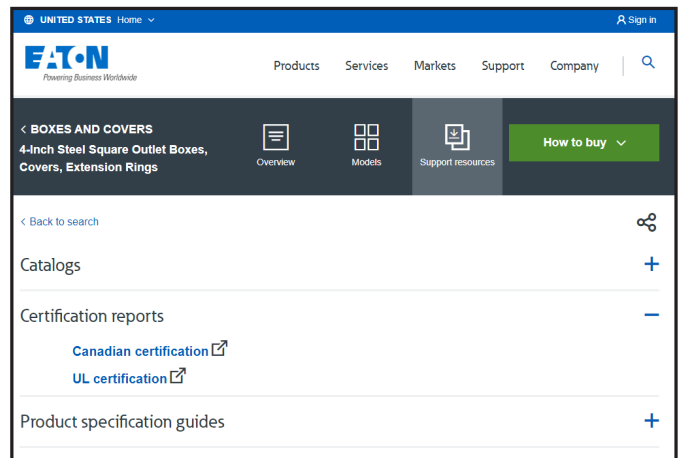

Outlet boxes

### Standard materials – steel covers, outlet and switch boxes:

- Steel boxes and covers are made of .0625 inch thick pre-galvanized sheet steel
- Handy box covers are made of .030 inch thick galvanized sheet steel

# Switch & outlet boxes – technical data

## Calculating box size and wire fill

### Calculate the minimum box size:

NEC® 314.16 (A) and (B) describes the detailed way of counting wires, as well as clamps, fittings or devices (i.e., switches, receptacles, combination devices) – by establishing an equivalent conductor value for each. Those values are added together to get a total number of conductors. The minimum size box is the smallest one in Table 314.16(A) that can accommodate that number of conductors.

1. No matter how many ground wires come into a box, they only count as one conductor within the box.
2. Any wire running unbroken through the box counts as one wire.
3. Each wire coming into a splice device (crimp or twist-on type) is counted as one wire.
4. Each wire coming into the box and connecting to a device counts as one wire of that size.
5. Fixture studs, cable clamps and hickies are to be counted as one regardless of how many there may be. If a box contains two cable clamps, the total is only to be increased by one.
6. Where devices are mounted in the box, the total conductor count must be increased by two for each mounting strap.

#### Example #1:


**Conduit Boxes:** Supply power to a switch that will control a remote light with #14 conductors. Metal conduit and fittings will be used as the wire way. You must provide space for four conductors and one switch, totaling 6. Read across the line “Allowances” in the Box Fill table to column 6, then read down to the minimum cubic inches required for #14 conductor. This example requires a minimum of 12.0 cubic inches.

#### Example #2:

**Cable Boxes:** This example will illustrate how the minimum size is determined for a box with cable clamps fed by two #12-2 nonmetallic sheathed cables and supplying a 15A duplex receptacle. After supplying the receptacle, the conductors are extended to other outlets.

|                           |   |
|---------------------------|---|
| Circuit conductors.....   | 4 |
| Ground conductors .....   | 1 |
| Cable clamps .....        | 1 |
| Device (receptacle) ..... | 2 |
| Total .....               | 8 |

Using the Box Fill table from the next page, read across the line “Allowances” to column 8, then down to the minimum cubic inches required for #12 conductor. This example requires a minimum of 18.0 cubic inches.



# Switch & outlet boxes – technical data

**Table 314.16(A) metal boxes**

| Box dimension (in.)<br>Trade Size or Type | Min.    | Maximum number of conductors (arranged by AWG size) |        |        |        |        |       |       |
|---|---------|---|--------|--------|--------|--------|-------|-------|
|   | Cu. in. | No. 18  | No. 16 | No. 14 | No. 12 | No. 10 | No. 8 | No. 6 |
| 4 X 1¼ round or octagonal                 | 12.5    | 8   | 7      | 6      | 5      | 5      | 5     | 2     |
| 4 X 1½ round or octagonal                 | 15.5    | 10  | 8      | 7      | 6      | 6      | 5     | 3     |
| 4 X 2⅝ round or octagonal                 | 21.5    | 14  | 12     | 10     | 9      | 8      | 7     | 4     |
| 4 X 1¼ square                             | 18.0    | 12  | 10     | 9      | 8      | 7      | 6     | 3     |
| 4 X 1½ square                             | 21.0    | 14  | 12     | 10     | 9      | 8      | 7     | 4     |
| 4 X 2⅝ square                             | 30.3    | 20  | 17     | 15     | 13     | 12     | 10    | 6     |
| 4⅞ X 1¼ square                            | 25.5    | 17  | 14     | 12     | 11     | 10     | 8     | 5     |
| 4⅞ X 1½ square                            | 29.5    | 19  | 16     | 14     | 13     | 11     | 9     | 5     |
| 4⅞ X 2⅝ square                            | 42.0    | 28  | 24     | 21     | 18     | 16     | 14    | 8     |
| 3 X 2 x 1½ device                         | 7.5     | 5   | 4      | 3      | 3      | 3      | 2     | 1     |
| 3 X 2 x 2 device                          | 10.0    | 6   | 5      | 5      | 4      | 4      | 3     | 2     |
| 3 X 2 x 2¼ device                         | 10.5    | 7   | 6      | 5      | 4      | 4      | 3     | 2     |
| 3 X 2 x 2½ device                         | 12.5    | 8   | 7      | 6      | 5      | 5      | 4     | 2     |
| 3 X 2 x 2¾ device                         | 14.0    | 9   | 8      | 7      | 6      | 5      | 4     | 2     |
| 3 X 2 x 3½ device                         | 18.0    | 12  | 10     | 9      | 8      | 7      | 6     | 3     |
| 4 X 2⅝ x 1½ device                        | 10.3    | 6   | 5      | 5      | 4      | 4      | 3     | 2     |
| 4 X 2⅝ x 1⅞ device                        | 13.0    | 8   | 7      | 6      | 5      | 5      | 4     | 2     |
| 4 X 2⅝ x 2⅝ device                        | 14.5    | 9   | 8      | 7      | 6      | 5      | 4     | 2     |
| ¾ X 2 x 2½ masonry box/gang               | 14.0    | 9   | 8      | 7      | 6      | 5      | 4     | 2     |
| ¾ X 2 x 3½ masonry box/gang               | 21.0    | 14  | 12     | 10     | 9      | 8      | 7     | 4     |
| FS - 1¼ single cover gang                 | 13.5    | 9   | 7      | 6      | 6      | 5      | 4     | 2     |
| FD - 2⅝ single cover gang                 | 18.0    | 12  | 10     | 9      | 8      | 7      | 6     | 3     |
| FS - 1¼ multiple cover gang               | 18.0    | 12  | 10     | 9      | 8      | 7      | 6     | 3     |
| FD - 2⅝ multiple cover gang               | 24.0    | 16  | 13     | 12     | 10     | 9      | 8     | 4     |

**Table 314.16(B) volume required per conductor**

| Size of conductor | Free space within box for each conductor |
|-------------------|--|
| No. 18            | 1.5 cubic inches                         |
| No. 16            | 1.75 cubic inches                        |
| No. 14            | 2 cubic inches                           |
| No. 12            | 2.25 cubic inches                        |
| No. 10            | 2.5 cubic inches                         |
| No. 8             | 3 cubic inches                           |
| No. 6             | 5 cubic inches                           |

For SI units: one cubic inch = 16.4 cm<sup>3</sup>.


Reprinted with permission from NFPA 70-2005, the National Electrical Code®, Copyright® 2017 National Fire Protection Association, Quincy MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety. National Electrical Code® and NEC® are registered trademarks of the National Fire Protection Association, Inc., Quincy, MA 02269.

# Switch & outlet boxes – technical data


## Outlet box brackets

### Bracket technical data


| Bracket type | C                             | D                               | F                             | S                               | SD                             | VP                              | VS                              | H                              | M                              | MSB                           | SSB                           | VMS                             |
|--------------|-------------------------------|---------------------------------|-------------------------------|---------------------------------|--------------------------------|---------------------------------|---------------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|---------------------------------|
| Length       | 3 <sup>5</sup> / <sub>8</sub> | 5 <sup>13</sup> / <sub>16</sub> | 2 <sup>7</sup> / <sub>8</sub> | 5 <sup>13</sup> / <sub>16</sub> | 5 <sup>9</sup> / <sub>16</sub> | 6 <sup>61</sup> / <sub>64</sub> | 6 <sup>59</sup> / <sub>64</sub> | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>2</sub> | 1 <sup>1</sup> / <sub>4</sub> | 6 <sup>13</sup> / <sub>16</sub> |
| Width        | 2 <sup>1</sup> / <sub>2</sub> | 7 <sup>7</sup> / <sub>8</sub>   | 1 <sup>3</sup> / <sub>4</sub> | 7 <sup>7</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>9</sup> / <sub>16</sub>  | 1 <sup>9</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>32</sub> | 1 <sup>3</sup> / <sub>32</sub> | 1 <sup>3</sup> / <sub>8</sub> | 2 <sup>1</sup> / <sub>8</sub> | 1 <sup>3</sup> / <sub>8</sub>   |
| Set back     | 1 <sup>1</sup> / <sub>4</sub> | 5 <sup>5</sup> / <sub>8</sub>   |                               | 5 <sup>5</sup> / <sub>8</sub>   | 5 <sup>5</sup> / <sub>8</sub>  | 3 <sup>3</sup> / <sub>8</sub>   | 7 <sup>7</sup> / <sub>8</sub>   |                                |                                |                               |                               | 5 <sup>5</sup> / <sub>16</sub>  |
| For metal    |                               | √                               | √                             |                                 | √                              |                                 | √                               | √                              | √                              | √                             | √                             | √                               |
| For wood     | √                             | √                               | √                             | √                               | √                              | √                               | √                               | √                              | √                              |                               |                               | √                               |
| Stud mount   | side/ceiling                  | side                            | face                          | side                            | side                           | side                            | side                            | face                           | face                           | face                          | face                          | side                            |




"C" bracket




"D" bracket




"F" bracket




"S" bracket




"SD" bracket




"VP" bracket



"VS" bracket




"H" bracket




"M" bracket



"MSB" bracket



"SSB" bracket



"VMS" bracket


# Switch & outlet boxes – technical data

## Outlet box clamps


### Clamp technical data

| Clamp type      | Raceway type       |               |                                     |               |                |                   |                             |                             |
|-----------------|--------------------|---------------|-------------------------------------|---------------|----------------|-------------------|-----------------------------|-----------------------------|
|                 | Armored cable (BX) |               | Metal clad interlocking cable (MCI) |               |                |                   | Non-metallic sheathed cable | Flexible metallic conduit   |
|                 | Steel              | Aluminum      | Steel                               | Aluminum      | Steel (MC-PCS) | Aluminum (MC-PCS) |                             |                             |
| Quick-Lok boxes | #14-2 to 10-4      | #14-2 to 10-4 | #14-2 to 10-3                       | #14-2 to 10-3 | #12-2 to 10-2  | #12-2 to 12-3     | —                           | —                           |
| MC-BX           | #14-2 to 12-3      | #14-2 to 10-2 | #14-2 to 10-2                       | #14-2 to 10-2 | —              | —                 | —                           | $\frac{7}{32}$ " trade size |
| NM-1            | —                  | —             | —                                   | —             | —              | —                 | #14-2 to #12-3 w/ground     | —                           |
| NM-2            | —                  | —             | —                                   | —             | —              | —                 | #14-2 to #12-3 w/ground     | —                           |
| NM-4            | —                  | —             | —                                   | —             | —              | —                 | #14-2 to #12-3 w/ground     | —                           |

**Note:** Applicable and listed Southwire Armorlite™ all purpose type MC cable and all purpose hospital care facility type HCF MC cable

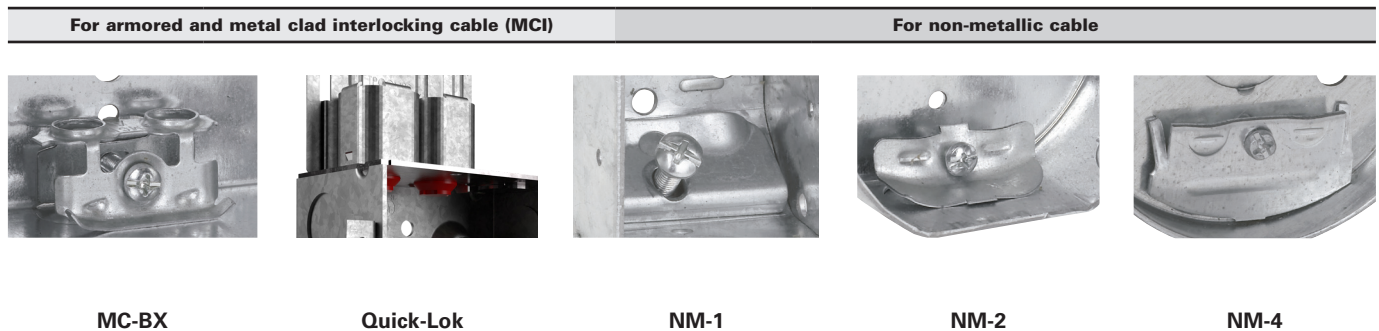

## Outlet box entry knockout and pryouts

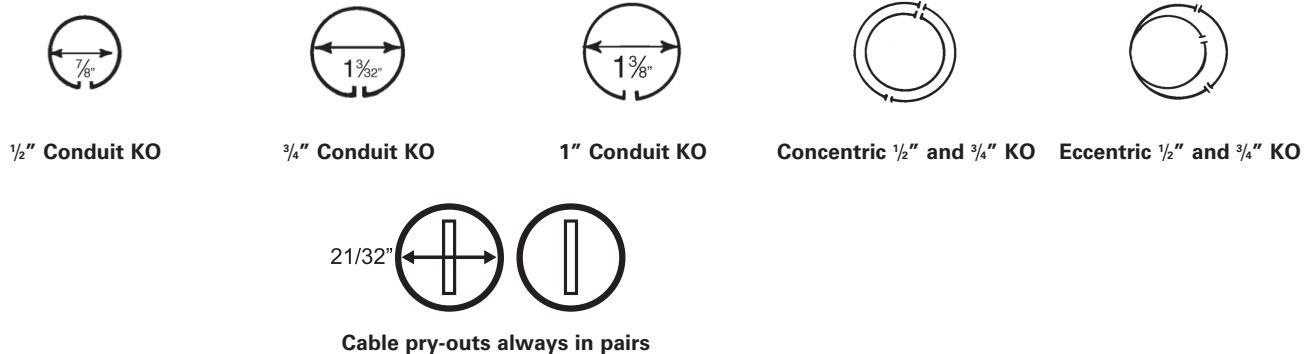

Conduit KOs have standard trade size dimensions. KOs are uniform and true for attachment of cable or conduit connectors. Pry-outs for cable entrance are slotted – a twist with screwdriver removes them. KOs and pry-outs are precision stamped to permit easy removal, but remain sufficiently strong and sturdy when not removed.

4" square drawn boxes feature a  $\frac{1}{2}$ " and  $\frac{3}{4}$ " "inverted" concentric KO – easily removed. Our 4" square welded boxes feature our  $\frac{1}{2}$ " eccentric KO which also features easy removability of both the  $\frac{1}{2}$ " and  $\frac{3}{4}$ " KOs.

**Note:** These KOs are suitable for bonding without bonding jumpers around concentric (or eccentric) knockouts where used in circuits above or below 250V.

# Steel square boxes


## 4" SQUARE OUTLET BOXES & COVERS

### Applications:

- For use with conduit
- Available in red for fire alarm applications

### Features:

- Ideal for exposed work applications, providing an easy method for the installation of electrical devices (switches, receptacles, fans, lights, etc.)
- Raised ground screw location in the welded boxes saves time in installation
- Available with pre-installed ground screws and pigtails for increased labor savings
- Knockouts are suitable for use without a bonding jumper in circuits above or below 250 volts
- Available in two depths for differing cubic capacity requirements
- Welded or drawn construction to match customer preference
- Extensive cover offering to meet various customer applications and needs

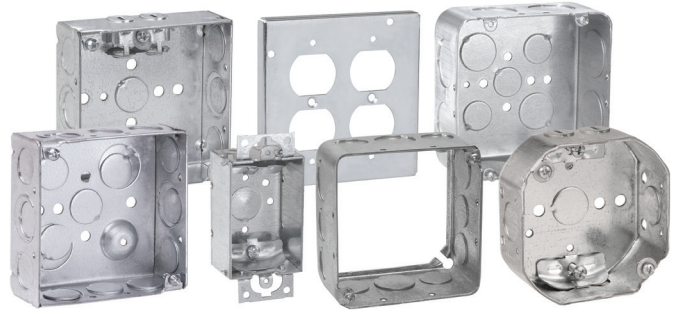

### Certifications and compliances:

- UL Listed

## 4" SQUARE OUTLET BOXES – 18.0 CUBIC INCH CAPACITY

1 1/4" DEEP – FOR CONDUIT

UL LISTED



TP408

#### Knockouts

| Cat. # | Bracket | Description | Grounding method | Knockouts |          | Fixture rated (weight lbs.) | Unit qty. | Wt. lbs. per 100 |
|--------|---------|-------------|------------------|-----------|----------|-----------------------------|-----------|------------------|
|        |         |             |                  | Sides     | Bottom   |                             |           |                  |
| TP408  | -       | Drawn       | Tapped hole      | 12 – 1/2" | 5 – 1/2" | 50                          | 50        | 61               |

# Steel square boxes

## 4" SQUARE OUTLET BOXES – 22.0 CUBIC INCH CAPACITY (WELDED) 21.0 CUBIC INCH CAPACITY (DRAWN)

1 1/2" DEEP – FOR CONDUIT

UL LISTED



TP404



TP404SSB



TP404MSB



TP405




TP410



TP412  
TP839<sup>Ⓟ</sup>




TP414




TP418




TP425



TP469<sup>Ⓟ</sup>



TP467MSB



TP830<sup>Ⓟ</sup>

### Knockouts

| Cat. #             | Bracket        | Description | Grounding method | Sides                       | Bottom                      | Fixture rated (weight lbs.) | Unit qty. | Wt. lbs. per 100 |
|--------------------|----------------|-------------|------------------|-----------------------------|-----------------------------|-----------------------------|-----------|------------------|
| TP404 <sup>Ⓟ</sup> | -              | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | 50                          | 50        | 72               |
| TP404MSB           | MSB            | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E |                             | 25        | 83               |
| TP404SSB           | SSB            | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E |                             | 50        | 83               |
| TP425              | "VP"           | Welded      | Ground bump      | 6 - 1/2", 3 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E |                             | 25        | 82               |
| TP423 <sup>Ⓟ</sup> | "VMS"          | Welded      | Ground bump      | 6 - 1/2", 3 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E |                             | 25        | 81               |
| TP405              | -              | Drawn       | Tapped hole      | 4 - 1/2", 6 - 1/2" + 3/4" C | 3 - 1/2", 2 - 3/4"          |                             | 50        | 67               |
| TP410              | -              | Drawn       | Tapped hole      | 12 - 1/2"                   | 5 - 1/2"                    | 50                          | 50        | 67               |
| TP412              | -              | Drawn       | Tapped hole      | 8 - 3/4"                    | 3 - 1/2", 2 - 3/4"          |                             | 50        | 67               |
| TP414 <sup>Ⓟ</sup> | -              | Drawn       | Ground bump      | 8 - 1/2", 4 - 3/4"          | 2 - 1/2", 2 - 3/4"          |                             | 50        | 67               |
| TP418              | "F", set flush | Welded      | Ground bump      | 6 - 1/2", 3 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E |                             | 25        | 84               |
| TP467              | -              | Welded      | Ground bump      | 8 - 3/4"                    | 2 - 1/2", 2 - 1/2" + 3/4" E | 50                          | 50        | 72               |
| TP467MSB           | MSB            | Welded      | Ground bump      | 8 - 3/4"                    | 2 - 1/2", 2 - 1/2" + 3/4" E |                             | 25        | 78               |
| TP469              | "VMS"          | Welded      | Ground bump      | 6 - 3/4"                    | 2 - 1/2", 2 - 1/2" + 3/4" E |                             | 25        | 81               |
| <b>Air Plenum</b>  |                |             |                  |                             |                             |                             |           |                  |
| TP830 <sup>Ⓟ</sup> | -              | Drawn       | Tapped screw     | 8 - 1/2", 4 - 3/4"          | 3 - 1/2", 2 - 3/4"          |                             | 50        | 72               |
| TP839 <sup>Ⓟ</sup> | -              | Drawn       | Tapped screw     | 8 - 3/4"                    | 3 - 1/2", 2 - 3/4"          |                             | 50        | 72               |

<sup>Ⓟ</sup>For air plenum (no mounting holes) - not UL Listed.  
<sup>Ⓟ</sup>Available in painted options.


Steel boxes




# Steel square boxes

## 4" SQUARE OUTLET BOXES – 22.0 CUBIC INCH CAPACITY


1½" DEEP  
FOR NON-METALLIC CABLE – CLAMPS IN EACH END  
UL LISTED




TP444




TP444MSB



TP444SSB



TP449




TP446


| Cat. #   | Bracket        | Description | Knockouts                        |        | Unit qty. | Wt. lbs. per 100 |
|----------|----------------|-------------|----------------------------------|--------|-----------|------------------|
|          |                |             | Sides                            | Bottom |           |                  |
| TP444    | -              | Welded      | 4 - cable, 4 - ½", 2 - ½" + ¾" E | 1 - ½" | 50        | 77               |
| TP444MSB | MSB            | Welded      | 4 - cable, 4 - ½", 2 - ½" + ¾" E | 1 - ½" | 25        | 81               |
| TP444SSB | SSB            | Welded      | 4 - cable, 4 - ½", 2 - ½" + ¾" E | 1 - ½" | 50        | 88               |
| TP446    | "F", set flush | Welded      | 4 - cable, 2 - ½", 1 - ½" + ¾" E | 1 - ½" | 25        | 88               |
| TP449    | "VMS"          | Welded      | 4 - cable, 2 - ½", 1 - ½" + ¾" E | 1 - ½" | 25        | 85               |

## 4" SQUARE OUTLET BOXES – 22.0 CUBIC INCH CAPACITY


1½" DEEP  
FOR ARMORED & METAL-CLAD (MCI) CABLE & HCF CABLE – CLAMPS IN EACH END  
UL LISTED




TP454




TP454MSB



TP454SSB



TP456



TP459

| Cat. #   | Bracket        | Description | Knockouts                        |        | Fixture rated (weight lbs.) | Unit qty. | Wt. lbs. per 100 |
|----------|----------------|-------------|----------------------------------|--------|-----------------------------|-----------|------------------|
|          |                |             | Sides                            | Bottom |                             |           |                  |
| TP459    | "VMS"          | Welded      | 4 - cable, 2 - ½", 1 - ½" + ¾" E | 1 - ½" |                             | 25        | 89               |
| TP454    | -              | Welded      | 4 - cable, 4 - ½", 2 - ½" + ¾" E | 1 - ½" | 50                          | 50        | 81               |
| TP454MSB | MSB            | Welded      | 4 - cable, 4 - ½", 2 - ½" + ¾" E | 1 - ½" |                             | 25        | 91               |
| TP454SSB | SSB            | Welded      | 4 - cable, 4 - ½", 2 - ½" + ¾" E | 1 - ½" |                             | 25        | 82               |
| TP456    | "F", set flush | Welded      | 4 - cable, 2 - ½", 1 - ½" + ¾" E | 1 - ½" |                             | 25        | 92               |

Ⓐ UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™). MCAP™ is a registered trademark of Southwire Company.

# Steel square boxes


## 4" SQUARE OUTLET BOXES – 30.3 CUBIC INCH CAPACITY

2 1/8" DEEP – FOR CONDUIT


UL LISTED



TP403




TP403MSB



TP403SSB



TP432




TP432VMS




TP434



TP438/TP831<sup>ⓑ</sup>



TP432MSB




TP451



TP4HPF



TP4MPF



TP4MSBPF

| Cat. #               | Bracket | Description | Grounding method | Knockouts                   |                             | Fixture rated (weight lbs.) | Unit qty. | Wt. lbs. per 100 |
|----------------------|---------|-------------|------------------|-----------------------------|-----------------------------|-----------------------------|-----------|------------------|
|                      |         |             |                  | Sides                       | Bottom                      |                             |           |                  |
| TP403 <sup>ⓑ</sup>   | -       | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | 50                          | 25        | 84               |
| TP403BH <sup>ⓑ</sup> | -       | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | 50                          | 25        | 84               |
| TP403MSB             | MSB     | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 95               |
| TP403SSB             | SSB     | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 95               |
| TP432 <sup>ⓑ</sup>   | -       | Welded      | Ground bump      | 8 - 3/4"                    | 2 - 1/2", 2 - 1/2" + 3/4" E | 50                          | 25        | 84               |
| TP432MSB             | MSB     | Welded      | Ground bump      | 8 - 3/4"                    | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 95               |
| TP432VMS             | "VMS"   | Welded      | Ground bump      | 6 - 3/4"                    | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 99               |
| TP436                | -       | Welded      | Ground bump      | 8 - 1"                      | 2 - 1/2", 2 - 1/2" + 3/4" E | 50                          | 25        | 84               |
| TP436MSB             | MSB     | Welded      | Ground bump      | 8 - 1"                      | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 95               |
| TP434 <sup>ⓑ</sup>   | -       | Drawn       | Ground bump      | 8 - 1/2", 4 - 3/4"          | 3 - 1/2", 2 - 3/4"          | 50                          | 25        | 84               |
| TP438                | -       | Drawn       | Ground bump      | 4 - 1/2", 6 - 1/2" + 3/4" C | 3 - 1/2", 2 - 3/4"          | -                           | 25        | 84               |
| TP451 <sup>ⓑ</sup>   | "VMS"   | Welded      | Ground bump      | 6 - 1/2", 3 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 96               |
| TP437                | "VP"    | Welded      | Ground bump      | 6 - 1/2", 3 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 98               |
| TP4H <sup>ⓑ</sup>    | "S"     | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 92               |
| TP4MPF <sup>ⓑ</sup>  | "S"     | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 96               |
| TP4MSB <sup>ⓑ</sup>  | MSB     | Welded      | Ground bump      | 6 - 1/2", 3 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 98               |
| TP4CS <sup>ⓑ</sup>   | -       | Welded      | Ground bump      | 8 - 1/2", 4 - 1/2" + 3/4" E | 2 - 1/2", 2 - 1/2" + 3/4" E | -                           | 25        | 88               |
| <b>Air Plenum</b>    |         |             |                  |                             |                             |                             |           |                  |
| TP831 <sup>ⓑ</sup>   | -       | Drawn       | Ground bump      | 8 - 1/2", 4 - 3/4"          | 3 - 1/2", 2 - 3/4"          | -                           | 25        | 90               |

<sup>ⓑ</sup>For Air Plenum (no mounting holes) - not UL Listed.

<sup>ⓐ</sup>Available in painted options.

<sup>ⓒ</sup>UL Listed.

Steel boxes

# Steel square boxes

## 4" SQUARE OUTLET BOXES – 30.3 CUBIC INCH CAPACITY


2 1/8" DEEP

FOR NON-METALLIC CABLE – CLAMPS IN EACH END

UL LISTED




TP450



TP450MSB



TP450SSB



TP452

| Cat. #   | Bracket | Description | Grounding method | Knockouts                              |          | Fixture rated (weight lbs.) | Unit qty. | Wt. lbs. per 100 |
|----------|---------|-------------|------------------|--|----------|-----------------------------|-----------|------------------|
|          |         |             |                  | Sides                                  | Bottom   |                             |           |                  |
| TP450    | -       | Welded      | Ground bump      | 4 - cable, 4 - 1/2", 2 - 1/2" + 3/4" E | 1 - 1/2" | 50                          | 25        | 90               |
| TP450MSB | MSB     | Welded      | Ground bump      | 4 - cable, 4 - 1/2", 2 - 1/2" + 3/4" E | 1 - 1/2" |                             | 25        | 101              |
| TP450SSB | SSB     | Welded      | Ground bump      | 4 - cable, 4 - 1/2", 2 - 1/2" + 3/4" E | 1 - 1/2" |                             | 25        | 101              |
| TP452    | "VMS"   | Welded      | Ground bump      | 4 - cable, 2 - 1/2", 1 - 1/2" + 3/4" E | 1 - 1/2" |                             | 25        | 104              |


## 4" SQUARE OUTLET BOXES – 30.3 CUBIC INCH CAPACITY

2 1/8" DEEP


FOR ARMORED & METAL-CLAD (MCI) CABLE & HCF CABLE – CLAMPS IN EACH END

UL LISTED


Steel boxes




TP431



TP431MSB



TP431SSB



TP440

| Cat. #                | Bracket | Description | Grounding method | Knockouts                              |          | Fixture rated (weight lbs.) | Unit qty. | Wt. lbs. per 100 |
|-----------------------|---------|-------------|------------------|--|----------|-----------------------------|-----------|------------------|
|                       |         |             |                  | Sides                                  | Bottom   |                             |           |                  |
| TP431 <sup>A</sup>    | -       | Welded      | Ground bump      | 4 - cable, 4 - 1/2", 2 - 1/2" & 3/4" E | 1 - 1/2" | 50                          | 25        | 91               |
| TP431MSB <sup>A</sup> | MSB     | Welded      | Ground bump      | 4 - cable, 4 - 1/2", 2 - 1/2" & 3/4" E | 1 - 1/2" |                             | 25        | 91               |
| TP431SSB <sup>A</sup> | SSB     | Welded      | Ground bump      | 4 - cable, 4 - 1/2", 2 - 1/2" & 3/4" E | 1 - 1/2" |                             | 25        | 102              |
| TP440 <sup>A</sup>    | "VMS"   | Welded      | Ground bump      | 4 - cable, 2 - 1/2", 1 - 1/2" & 3/4" E | 1 - 1/2" |                             | 25        | 103              |


<sup>A</sup>UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™). MCAP™ is a registered trademark of Southwire Company.

# Steel square boxes


## 4" SQUARE TWO DEVICE BOXES – 30.3 CUBIC INCH CAPACITY

2 1/8" DEEP – FOR CONDUIT

UL LISTED



TP391



TP395

| Cat. # | Bracket        | Description | Grounding method | Knockouts          |                    | Unit qty. | Wt. lbs. per 100 |
|--------|----------------|-------------|------------------|--------------------|--------------------|-----------|------------------|
|        |                |             |                  | Sides              | Bottom             |           |                  |
| TP391  | "VS", set 7/8" | Drawn       | Ground bump      | 6 - 1/2", 3 - 3/4" | 3 - 1/2", 2 - 3/4" | 25        | 95               |
| TP395  | -              | Drawn       | Ground bump      | 8 - 1/2", 4 - 3/4" | 3 - 1/2", 2 - 3/4" | 25        | 84               |


## 4" SQUARE OUTLET BOXES – 50.0 CUBIC INCH CAPACITY

3 1/2" DEEP – FOR CONDUIT


UL LISTED, FILE NO. E-15022

### Applications:

- 4" square, 3 1/2" deep outlet boxes are ideal for applications requiring increased capacity, including the installation of speaker boxes, fire alarms, strobes, security cameras and other oversized devices
- For use with rigid/IMC and EMT conduit



TP411



TP413

| Cat. #             | Bracket | Description | Grounding method | Knockouts                           |                     | Unit qty. | Wt. lbs. per 100 |
|--------------------|---------|-------------|------------------|-------------------------------------|---------------------|-----------|------------------|
|                    |         |             |                  | Sides                               | Bottom              |           |                  |
| TP411 <sup>P</sup> | "S"     | Welded      | Tapped hole      | 10 - 1/2" + 3/4" C                  | 4 - 1/2" + 3/4" C   | 10        | 138              |
| TP413 <sup>P</sup> | -       | Welded      | Ground bump      | 8 - 1/2" + 3/4" C, 4 - 3/4", 4 - 1" | 2 - 1/2" + 2 - 3/4" | 10        | 113              |

<sup>P</sup>Available in painted options.

# Steel square covers

## 4" SQUARE EXTENSION RINGS

1 1/2" DEEP WITH CONDUIT KNOCKOUTS – 21.0 CUBIC INCH CAPACITY

2 1/8" DEEP WITH CONDUIT KNOCKOUTS – 30.3 CUBIC INCH CAPACITY

UL LISTED



TP424

TP422①

TP426

TP53151-S

TP428, TP833②

TP443

TP53171-S

| Cat. #   | Description | Knockouts                   |        | Unit qty. | Wt. lbs. per 100 |
|--|-------------|-----------------------------|--------|-----------|------------------|
|  |             | Sides                       | Bottom |           |                  |
| <b>1 1/2" deep</b>   |             |                             |        |           |                  |
| TP424  | Drawn       | 12 - 1/2"                   | -      | 50        | 46               |
| TP426  | Drawn       | 8 - 3/4"                    | -      | 50        | 38               |
| TP428  | Drawn       | 8 - 1/2", 4 - 3/4"          | -      | 50        | 46               |
| TP53151-S  | Welded      | 6 - 1/2", 4 - 1/2" + 3/4" C | -      | 50        | 38               |
| TP833②   | Drawn       | 8 - 1/2", 4 - 3/4"          | -      | 50        | 48               |
| <b>2 1/8" deep</b>   |             |                             |        |           |                  |
| TP443③   | Drawn       | 8 - 1/2", 4 - 3/4"          | -      | 25        | 66               |
| TP465④   | Drawn       | 8 - 1"                      | -      | 25        | 60               |
| TP53171-S  | Welded      | 6 - 1/2", 4 - 1/2" + 3/4" C | -      | 25        | 70               |
| <b>1 1/2" deep switch &amp; masonry box extension ring</b> |             |                             |        |           |                  |
| TP422①④  | Welded      | 8 - 1/2", 4 - 1/2" + 3/4" E | -      | 50        | 50               |

② For air plenum (no mounting holes). Requires the use of TP854; purchase separately - not UL Listed.

① For use as extension with switch box, not four square box.

④ CSA certified.

Steel boxes

## FLEXIBLE FIXTURE HANGERS

Square flexible fixture hangers are used in commercial or light industrial applications where HID high bay and low bay lighting fixtures are used. Specific applications include storage facilities, shipping warehouses, retail and DIY facilities.

### Features:

- Suitable for use with 1/2" or 3/4" fixture conduit stems, these hangers allow the conduit stem of the fixture (luminaire) to swing in any direction;

| Cat. #      | Swing angle from vertical |
|-------------|---------------------------|
| TPRFH12     | 26°                       |
| TPSC-5075HF | 20°                       |

- Available for attachment to 4" square steel boxes
- Quickly and easily attached by two screws
- Hangers are drilled and tapped for use with 3/4" conduit stem as standard and come supplied with a 3/4" - 1/2" reducer for 1/2" conduit stem applications
- Hinged door on TPSC-5075HF allows for hands-free wiring

### Certifications and compliances:

- UL1598
- CSA C22.2 No. 250
- Suitable for damp locations

### Standard materials and finishes:

- Material – sheet steel
- Finish – plated for corrosion resistance



| Cat. #      | Description                              | Support Wt. (lbs.) |
|-------------|--|--------------------|
| TPRFH12     | For use with 4" square boxes             | 50                 |
| TPSC-5075HF | For use with 4" square boxes, hands free | 75                 |

Rating is based on the rating of the outlet box on which it is mounted to.

# Steel square covers

## COVERS FOR 4" SQUARE BOXES – CUBIC INCH CAPACITY (SEE BELOW)

UL LISTED

#8-32 screw used on covers



TP472

TP474

TP478

TP473, TP475, TP476,  
TP477, TP479, TP483

TP850

TP854

AMR0

| Cat. #                          | Description   | Unit qty. | Wt. lbs. per 100 | Capacity cu. in. |
|---------------------------------|---|-----------|------------------|------------------|
| TP472 <sup>H</sup> <sup>P</sup> | Flat blank  | 50        | 31               | -                |
| TP474 <sup>H</sup>              | Flat, open with ears 2 <sup>3</sup> / <sub>4</sub> "          | 50        | 21               | -                |
| TP478 <sup>H</sup> <sup>P</sup> | Flat, with 1/2" KO  | 50        | 31               | -                |
| TP487 <sup>H</sup>              | Flat, with 3/4" KO  | 50        | 29               | -                |
| TP473 <sup>H</sup>              | Raised 1/4", open with ears 2 <sup>3</sup> / <sub>4</sub> "   | 50        | 23               | 1.3              |
| TP476 <sup>H</sup>              | Raised 1/2", open with ears 2 <sup>3</sup> / <sub>4</sub> "   | 50        | 26               | 4.0              |
| TP477 <sup>H</sup> <sup>P</sup> | Raised 5/8", open with ears 2 <sup>3</sup> / <sub>4</sub> "   | 50        | 27               | 5.0              |
| TP475 <sup>H</sup>              | Raised 3/4", open with ears 2 <sup>3</sup> / <sub>4</sub> "   | 25        | 31               | 6.0              |
| TP479 <sup>H</sup>              | Raised 1", open with ears 2 <sup>3</sup> / <sub>4</sub> "     | 25        | 34               | 7.0              |
| TP483 <sup>C</sup> <sup>H</sup> | Raised 1 1/4", open with ears 2 <sup>3</sup> / <sub>4</sub> " | 25        | 31               | 9.5              |
| AMR0 <sup>L</sup>               | 3/4" - 1 1/2" round adjustable mud ring                       | 25        | 44               | 6.1              |

### Air Plenum

|                    |   |    |    |   |
|--------------------|---|----|----|---|
| TP850 <sup>B</sup> | Flat blank gasketed with captive screws | 25 | 31 | - |
| TP854 <sup>B</sup> | Flat ring double gasketed               | 25 | 12 | - |

<sup>B</sup> For air plenum (no mounting holes) - not UL Listed.

<sup>C</sup> cUL Listed.


<sup>L</sup> ETL listed.

<sup>H</sup> CSA certified.

<sup>P</sup> Available in painted options.

## MUD RINGS FOR 4" SQUARE STEEL OUTLET BOXES

UL LISTED

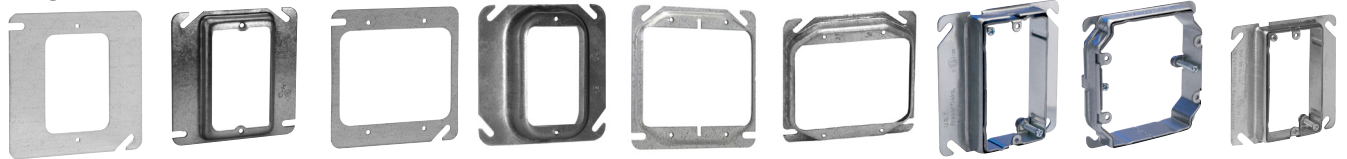

TP480

TP482, TP484,  
TP486, TP489

TP494

TP488, TP490

TP496

TP501, TP502

AMR1

AMR2

AMR158

| Cat. #                          | Description                     | Unit qty. | Wt. lbs. per 100 | Capacity cu. in. |
|---------------------------------|---------------------------------|-----------|------------------|------------------|
| <b>One Device</b>               |                                 |           |                  |                  |
| TP480 <sup>H</sup>              | Flat                            | 50        | 20               | -                |
| TP482 <sup>H</sup>              | 1/4" raised                     | 50        | 21               | 1.8              |
| TP484 <sup>H</sup> <sup>P</sup> | 1/2" raised                     | 50        | 23               | 3.8              |
| TP489 <sup>H</sup> <sup>P</sup> | 5/8" raised                     | 50        | 26               | 4.3              |
| TP486 <sup>H</sup> <sup>P</sup> | 3/4" raised                     | 50        | 30               | 5.5              |
| TP488 <sup>H</sup>              | 1" raised                       | 50        | 34               | 6.8              |
| TP490 <sup>H</sup>              | 1 1/4" raised                   | 25        | 39               | 8.5              |
| AMR1 <sup>C</sup>               | 3/4" - 1 1/2" raised adjustable | 25        | 47               | -                |
| AMR158 <sup>C</sup>             | 5/8" - 1 1/4" raised adjustable | 25        | 44               | 6.0              |
| <b>Two Device</b>               |                                 |           |                  |                  |
| TP494 <sup>H</sup>              | Flat                            | 50        | 12               | -                |
| TP496 <sup>H</sup> <sup>K</sup> | 1/4" raised                     | 50        | 13               | 3.0              |
| TP498 <sup>H</sup> <sup>K</sup> | 1/2" raised                     | 50        | 18               | 6.0              |
| TP499 <sup>H</sup> <sup>K</sup> | 5/8" raised                     | 50        | 22               | 8.0              |
| TP500 <sup>H</sup> <sup>K</sup> | 3/4" raised                     | 50        | 24               | 9.0              |
| TP501 <sup>H</sup>              | 1 1/4" raised                   | 25        | 31               | 14.0             |
| TP502 <sup>H</sup>              | 1" raised                       | 25        | 30               | 11.7             |
| AMR2 <sup>C</sup>               | 5/8" - 1 1/2" raised adjustable | 25        | 50               | 11.3             |

<sup>C</sup> cUL Listed.

<sup>H</sup> CSA certified.

<sup>K</sup> Slotted design for use with 4" square box partitions.

<sup>P</sup> Available in painted options.

# Steel square covers

## 4" SQUARE SURFACE COVERS – 5.5 CUBIC INCH CAPACITY

RAISED 1/2"


UL LISTED

CSA LISTED


Screw(s) provided in raised cover kit are for use with the center hole on duplex receptacles. Nuts that are provided in kit are to be used in conjunction with the screws that are provided as standard packaging with devices to mount device to raised cover. For GFCI device installation, no screw is needed; please disregard.



TP503




TP504




TP506



TP508



TP510



TP512



TP507, TP514,  
TP519




TP516




TP509 (4 screws),  
TP518 (2 screws)




TP513



TP511



TP515



TP517

| Cat. # | Description  | Unit qty. | Wt. lbs. per 100 |
|--------|--|-----------|------------------|
| TP503  | Raised blank   | 50        | 35               |
| TP504  | For one toggle switch and one single receptacle 1 <sup>13</sup> / <sub>32</sub> " (1.406) dia. | 50        | 31               |
| TP506  | For one toggle switch and one duplex receptacle  | 50        | 31               |
| TP508  | For two toggle switches  | 50        | 35               |
| TP510  | For two duplex receptacles   | 50        | 26               |
| TP512  | For one toggle switch  | 50        | 35               |
| TP507  | For one single receptacle 1 <sup>19</sup> / <sub>32</sub> " (1.594) dia.                       | 50        | 37               |
| TP514  | For one single receptacle 1 <sup>13</sup> / <sub>32</sub> " (1.406) dia.                       | 50        | 34               |
| TP519  | For one power outlet 1 <sup>23</sup> / <sub>32</sub> " (1.719) dia.                            | 50        | 37               |
| TP516  | For one duplex receptacle  | 50        | 31               |
| TP509  | For one power outlet 2 <sup>7</sup> / <sub>16</sub> " (2.438) dia.                             | 50        | 23               |
| TP518  | For one power outlet 2 <sup>3</sup> / <sub>16</sub> " (2.141) dia.                             | 50        | 34               |
| TP513  | For one GFCI receptacle  | 50        | 31               |
| TP511  | For two GFCI receptacles   | 50        | 26               |
| TP515  | For one toggle switch and one GFCI receptacle  | 50        | 31               |
| TP517  | For one duplex receptacle and one GFCI receptacle  | 50        | 26               |

Steel boxes

# Steel square covers

## UNI-MOUNT™ COVERS




The Uni-Mount combines the features of a mounting device plate with those of a box support, giving you one universal plate for all of your needs. Specifically designed for use with metal or wood studs:

The new and improved version incorporates four small holes on the left side (support side) of the bracket. These holes allow for the attachment of box mounting brackets to allow for use of both sides of the stud. The holes are strategically located to accept either the Eaton's B-Line Series BB423 bracket or the Caddy H23 bracket. Additionally, the viewing hole has been significantly enlarged (and is now diamond shaped) to make it even easier to find mark lines on the stud.


### Features:

- Guide tabs ensure consistent alignment on stud
- Stud alignment hole ensures consistent mounting height
- Rigid bracket design eliminates the need for far side support
- Available as a single or two device cover
- Universal design fits all 4" square boxes
- Available in 1/2", 5/8" and 3/4" raised
- Can be ordered pre-assembled to popular 4" square boxes
- Fast and easy installation
- Can be used in multiple applications, resulting in less items to stock
- Less labor intensive
- Less material handling
- No multiple assemblies to handle
- Can be used in Class II communications outlets for low voltage without a box
- UL Listed and CSA certified<sup>L</sup>
- UL File No. E-23156

<sup>L</sup>CSA requires a far side support.

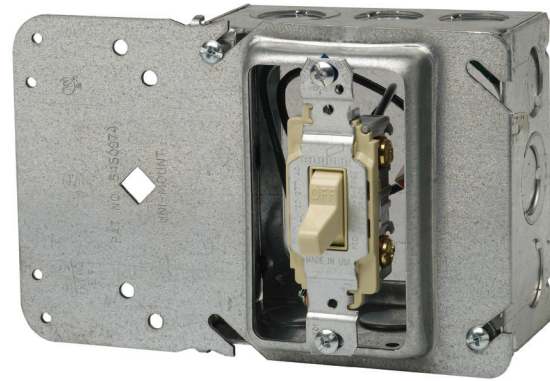

Single gang



Two gang

Steel boxes

| Cat. #  | Description | Capacity cu. in. | Unit qty. | Wt. lbs. per 100 |
|---|-------------|------------------|-----------|------------------|
| <b>Single Gang</b>  |             |                  |           |                  |
| TP30000   | 1/2" raised | 3.8              | 50        | 43               |
| TP31000   | 5/8" raised | 4.3              | 50        | 46               |
| TP32000   | 3/4" raised | 5.5              | 50        | 50               |
| <b>Two Gang</b>   |             |                  |           |                  |
| TP35000   | 1/2" raised | 6.0              | 50        | 38               |
| TP36000   | 5/8" raised | 8.0              | 50        | 52               |
| TP37000   | 3/4" raised | 9.0              | 50        | 54               |
| <b>Low profile screws – reduces risk of sheetrock bulge</b> |             |                  |           |                  |
| TP710   | L.P. screws | -                | 1000      | 0.5              |




# Steel square covers


## TILE WALL COVERS FOR 4" SQUARE BOXES – CUBIC INCH CAPACITY (SEE BELOW)

UL LISTED

CSA LISTED



TP524



TP534



TP540

### Applications:

- Typically used with tile or brick

### Features:

- Rounded corners help guide cuts around devices

| Cat. #            | Description   | Capacity cu. in. | Unit qty. | Wt. lbs. per 100 |
|-------------------|---------------|------------------|-----------|------------------|
| <b>One device</b> |               |                  |           |                  |
| TP520             | 1/2" raised   | 3.7              | 50        | 30               |
| TP522             | 3/4" raised   | 5.5              | 50        | 36               |
| TP524             | 1" raised     | 7.4              | 50        | 40               |
| TP526             | 1 1/4" raised | 9.3              | 25        | 46               |
| TP528             | 1 1/2" raised | 11.0             | 25        | 50               |
| TP530             | 2" Raised     | 14.8             | 25        | 62               |
| <b>Two device</b> |               |                  |           |                  |
| TP532             | 1/2" raised   | 5.0              | 10        | 24               |
| TP534             | 3/4" raised   | 7.8              | 10        | 30               |
| TP536             | 1" raised     | 10.3             | 10        | 36               |
| TP538             | 1 1/4" raised | 13.0             | 10        | 44               |
| TP540             | 1 1/2" raised | 15.5             | 10        | 50               |
| TP542             | 2" raised     | 20.8             | 10        | 66               |

Steel boxes

## 4" SQUARE BOX PARTITIONS




TP860



TP861



TP862



TP863

| Cat. #   | Description                          | Unit qty. | Wt. lbs. per 100 |
|--|--------------------------------------|-----------|------------------|
| <b>For 1 1/2" deep box with square cut tile wall two gang covers</b> |                                      |           |                  |
| TP860  | For 1/2", 3/4", 1" raised covers     | 25        | 13               |
| TP861  | For 1 1/4", 1 1/2", 2" raised covers | 25        | 18               |
| <b>For 2 1/8" deep box with square cut tile wall two gang covers</b> |                                      |           |                  |
| TP862  | For 1/2", 3/4", 1" raised covers     | 25        | 16               |
| TP863  | For 1 1/4", 1 1/2", 2" raised covers | 25        | 21               |