

Catalog Home

Product Datasheet	ANDERSON FARGO

GD451 -- Aluminum Automatic Dead End




Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .659 - .724" (16.74 - 18.39 mm), Clevis Bail

Product Specifications	
Category Image	Automatic Deadends Copper and Aluminum AAC, AAAC, ACAR, ACSR, Copper & Copperweld® Conductor
Series Image (Automatic)	GD-44 Series Automatic Dead End Clevis Bail AAC, AAAC & ACSR Conductor
PDF Catalog Page	Click HERE to view the web page.
Bail Option	Clevis Bail
Туре	Automatic
Material	Aluminum
Inhibitor Loaded	Yes
Shell Material	High Strength Aluminum Alloy
Bail Material	Galvanized Steel
Clevis Pin Material	Galvanized Steel
Cotter Pin Material	Stainless Steel
Assembly Rating (Ultimate)	Maximum Design Rating 10,000 lb (4,535 kg)
Dimension A	18.9 in
Dimension B	10.5 in
Diameter Range	.659724 in (16.74 - 18.39 mm)
Color Code	Green
Conductor Range Minimum - Maximum	AAC 336.4 kcmil (19) Thru AAC 350 kcmil (37) AAAC 394.6 kcmil str (19) ACSR 211.3 kcmil (12/7) Thru ACSR 336.4 kcmil (26/7)
Minimum Conductor Diameter	0.659
Maximum Conductor Diameter	0.724
Weight / Ea.	2.74 lbs

Standard Package	10
UPC Code	09635930913

Compressed Product Number

GD451

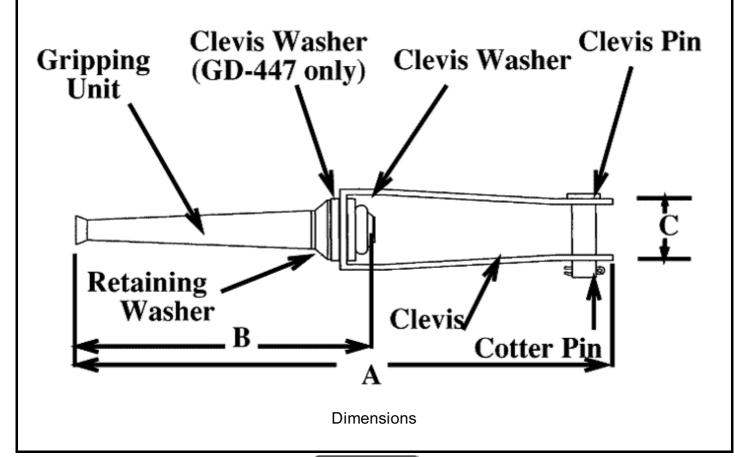

Catalog Home



Warranty Info | Trademarks | Terms of Use

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.