




[Catalog Home](#)

**Product Datasheet**

**CHANCE**

**STT70 -- Super Top-Tie**

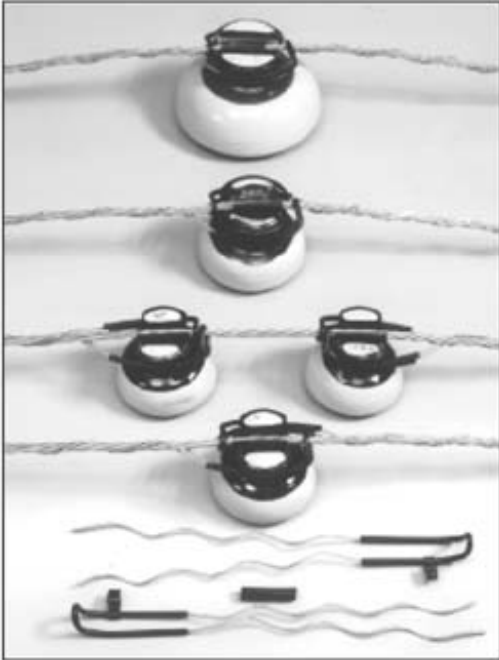

Super Top-Tie for use with conductor range .410" (10.4 mm)-.460" (11.7 mm)

**Product Specifications**

<b>Product Type</b>	Insulator Ties
<b>Conductor Type</b>	AAC 2/0 str(7), AAC 2/0 str(19), AAAC 156.1 kcmil str(7), ACSR 2/0 (6/1)
<b>Minimum Conductor Range</b>	.410" (10.4 mm)
<b>Maximum Conductor Range</b>	.460" (11.7 mm)
<b>Color Code</b>	Blue
<b>Fits Insulator Size</b>	Post or Pin Insulators with C, F, J Neck or ANSI 53-2 Spool
<b>Fits Insulator Neck Diameter</b>	2.25" (57.1 mm) - 3.5" (88.9 mm)
<b>Material Type</b>	Non-Standard
<b>UPC Code</b>	09635905345
<b>Standard Package</b>	50
<b>Standard Package Unit</b>	EA
<b>Min Order Qty</b>	50
<b>Weight / Ea.</b>	0.274 lbs

**Notes**

Consult Hubbell Power Systems for use of pins and posts outside specified neck dimensions.

**Compressed Product Number**

STT70

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.